



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature:SCREW-ON MALE RECEPTACLE SMOOTH BORE


Page No.

1 of 1

STK-571127361498

SCREW-ON MALE RECEPTACLE SMOOTH BORE

OUTLINE DRAWING

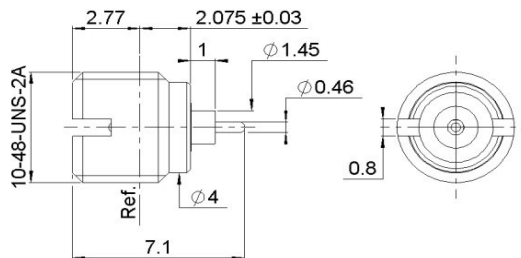

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40* GHz
VSWR	1.3* + 0.0000 x F(GHz) Maxi
Insertion loss	0.12 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (N/A - F(GHz)) dB Max
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	3 N mini
Opposite end	6.68 N mini
Panel nut	90 N.cm
Mating life	1000 Cycles mini
Weight	0,3000 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
Body		STAINLESS STEEL + BRASS			PASSIVATED		
Center contact		BERYLLIUM COPPER			GOLD OVER NICKEL		
Insulator		PTFE			-		
Gasket		-			-		
Others parts							
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in