



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



**Nomenclature: BULKHEAD STRAIGHT MALE JACK LIMITED
DETENT SOLDER TYPE CABLE .085**


Page No.

1 of 1

STK-571128321507

**BULKHEAD STRAIGHT MALE JACK LIMITED
DETENT SOLDER TYPE CABLE .085**

OUTLINE DRAWING

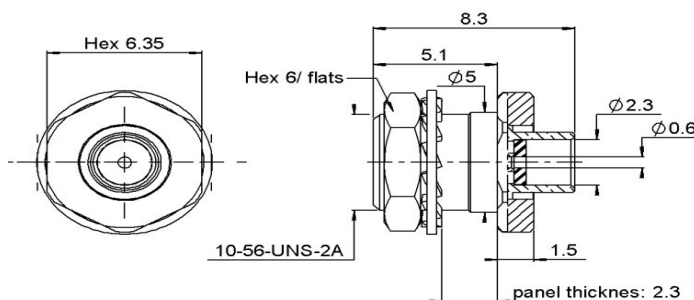

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40 GHz
VSWR	1.50 + 0.0000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
RF leakage	- (- F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	NA N mini
Opposite end	NA N mini
Torque	NA N.cm mini
Mating life	500 Cycles mini
Weight	1,1400 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
Body		STAINLESS STEEL + BRASS			PASSIVATED + GOLD1.3 OVER NICKEL2		
Center contact		BERYLLIUM COPPER			GOLD 1.27 OVER NICKEL 1.27		
Insulator		PTFE			-		
Gasket		-			-		
Others parts		BRASS			NICKEL-2		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in