

 Technical Data	STK SERIES CONNECTOR	 www.rfconnector.in	
---	------------------------------------	--	---


Nomenclature: SCREW-ON MALE RECEPTAHERMETIC STRAIGHT MALE RECEPTACLE SOLDER TYPE

Page No.
1 of 1

STK-571156741246

SCREW-ON MALE RECEPTAHERMETIC STRAIGHT MALE RECEPTACLE SOLDER TYPE

OUTLINE DRAWING

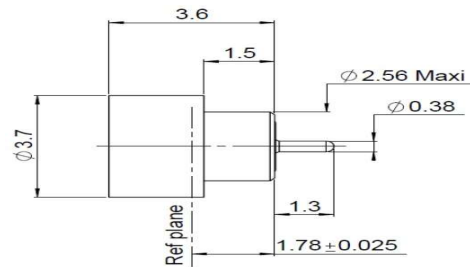

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40* GHz
VSWR	1.15* + 0.0000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
RF leakage	- (N/A - F(GHz)) dB Max
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
Hermetic seal	10-8 Atm.cm3/s

MECHANICAL INFORMATION

Mating End	6.8 N mini
Opposite end	6.68 N mini
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	0.0990 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
Body		DILVER P1			GOLD OVER NICKEL		
Center contact		DILVER P1			GOLD OVER NICKEL		
Insulator		GLASS			-		
Gasket		-			-		
Others parts							
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-


Synergy Telecom P Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in