



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF SMP SQ FLANGE EXT. DIELECTRIC


Page No.

1 of 1

STK-571182811257

CONN RF SMP SQ FLANGE EXT. DIELECTRIC

OUTLINE DRAWING

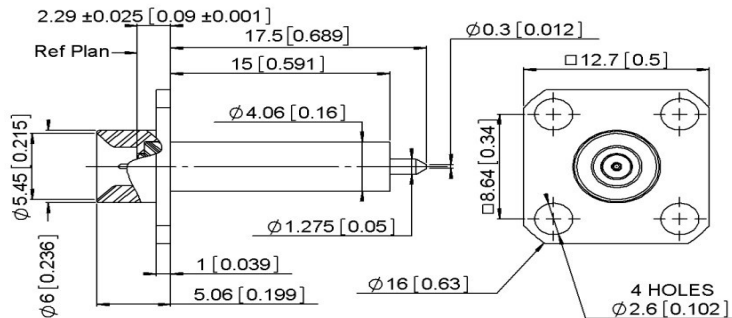

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12 GHz
VSWR	1.2* + 0.0000 x F(GHz) Maxi
Insertion loss	.1 √F(GHz) dB Max
RF leakage	- (N/A - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	6.8 N mini
Opposite end	6.8 N mini
Mating life	100 Cycles mini
Weight	2.1200 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		STAINLESS STEEL			PASSIVATED		
CENTER CONTACT		BERYLLIUM COPPER			GOLD OVER NICKEL		
INSULATOR		PTFE					
OTHERS PARTS		-			-		
GASKET		-			-		
OUTER CONTACT		-			-		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in