Encoder measurement

On the same setup, I also have a **US digital E6 encoder** with 2000 CPT, with which I want to measure the output angular displacement.

Questions:

1. On my setup, I will be using a 12V Li-Ion battery to power the geared DC motor. Can I use the same battery to power my encoder?
2. If the encoder reads 200 counts at time t_0, and 4200 counts at time t_1, how much did the motor shaft rotate?

Torque transducer
Type DRBK
with speed detection

Special features:

- Very short construction
- Broad input voltage range
- Current output and voltage output
- Measurement accuracy:
  ≤ 0,5% of full scale
- Measurtement ranges from 5 to 1000 Nm
- Contactless transfer of measured signal
- Approved strain gauge technology
- Internal measurement amplifier
- Speed detection optional available
- Simple power supply
- Multipurpose use

Description:

The torque transducers series DRBK are suitable for applications in laboratory as well as in industrial environment because of their compact outline and their multiple mounting options. The contactless transmission of supply voltage and measuring signal enables continuous operation with low wear out and no service.
For varying applications these transducers are available also with optional speed detection. The integrated measurement amplifier is supplied with 11,5 to 30 V DC and outputs an analog signal of 0 to ±5V and also a current output of 10 mA ±8 mA. Due to the broad range of supply voltage the transducer can be operated directly at a PLC. This transducer should be used only with the especially designed couplings.

ETH messtechnik gmbh Hagstrasse 10 D-74417 Gschwend Tel.: +49(0)7972-9310-0 Fax: -50 www. eth-messtechnik.de info@eth-messtechnik.de

Technical Data:

Supply voltage:	11,5 to 30V DC
Current consumption:	ca. 200mA
Rise time 10-90%	1ms
Limit frequency –3dB	1kHz
Voltage output:	0 to ±5V
IInternal resistance:	100 Ω
Current output:	10 ± 8mA
Burden at UB=12V	250 Ω
Burden at UB=24V	500 Ω
Ripple:	< 100mVss
Nonlinearity:	<0,3%
Hysteresis:	<0,3%
Deviation at zero point:	≤ ± 100mV/ ±200µA
Max. Measuerment fault:	0,5% (bez. a. d. Endwert)
Operating temperature:	0-60°C
Compensated temperature:	5-45°C
Temperature fault:	
Zero point:	0,05%/K
Sensitivity:	0,02%/K
Mechanical overload:	100%
Internal protection:	IP 40 DIN 40050
Connection:	12pin connector

Option speed:	(n)
Output:	Open- Collektor
Internal Pull Up:	4,7kΩ (5 V level)
External Pull Up:	24 V max / 20mA
Pulses / rev:	60

Ordering example :

DRBK10-n

Torque transducer measurement range 10 Nm

Option speed detection

Available accessories :

Measurement cable, Couplings, Evaluation device

The values for axial and radial load refer to the non-fixed housing

Size	Measure-ment range [Nm]	Spring constant C [Nm/rad]	Mass moment of inertia J [g•cm²]			Maximum axial load [N]	Maximum radial load [N]
			Total	Drive side	Measure-ment side		
I	5	1100	134	116	18	930	25
	10	2700	135	117	18	930	45
	20	5400	136	117	19	930	90
II	50	20 x 10^3	398	292	106	1580	210
	100	36 x 10^3	405	296	109	1580	420
	200	52 x 10^3	424	305	119	1580	845
III	500	290 x 10^3	3350	1879	1471	3920	1420
	1000	420 x 10^3	3519	1963	1556	3920	2875

ETH messtechnik gmbh Hagstrasse 10 D-74417 Gschwend Tel.: +49(0)7972-9310-0 Fax: -50 www. eth-messtechnik.de info@eth-messtechnik.de

Couplings for Transducer DRBK

MODEL **BKE**

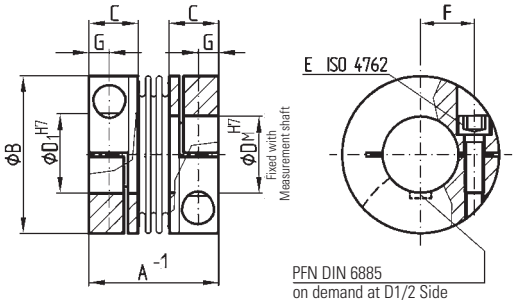

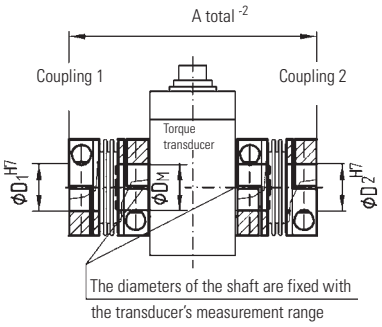

Properties:
- compact design
- easy to mount
- suited for space restricted installations
- low moment of inertia
- economically priced

Material: Bellows are made of highly flexible high-grade stainless steel, hubs see table

Design: With a single radial clamping screw per hub ISO 4762

Self opening clamp system optional: Loosening the clamp screw will force the clamp into open position

Temperature range: -30 to +100° C

Backlash: Absolutely backlash-free due to frictional clamped connection

Service life: These couplings have an infinite life and are maintenance-free if technical limits are not exceeded

Tolerance: On the hub / shaft connection 0,01 to 0,05 mm

Non-standard: Custom designs with varied tolerances, keyways, Non-standard material and bellows are available upon request

Model BKE			Series		
			20	200	1000
Rated torque	(Nm)	T_{KN}	20	200	1000
Overall length	(mm)	A^{-1}	40	59	89
Overall length for installation	(mm)	A_{total}^{-2}	130	172	246
Outer diameter	(mm)	B	49	66	110
Passungslänge	(mm)	C	16,5	23	34
Inner diameter possible from Ø to Ø H7	(mm)	$D_{1/2}$	15-28	24-35	40-60
Inner diameter for meas. shaft Ø H7		D_M	15	24	40
Screws ISO 4762		E	M5	M8	M12
Tightening torque of the fastening screw	(Nm)		8	40	130
Distance between centers	(mm)	F	17	23	39
Distance	(mm)	G	6	9,5	13
Mass moment of inertia	(10^{-3} kgm²)	J_{total}	0,05	0,18	7,2
Hub material			AL	AL	Stahl
Approx. weight	(kg)		0,13	0,4	3,5
Torsional stiffness	(10^3 Nm/rad)	C_T	41,9	138	570
Axial total	(mm)	max. Values	1	1,5	2
Lateral total	(mm)		0,15	0,15	0,15
Angular total	(°)		1	1	1
Axiale spring stiffness	(N/mm)	C_a	55,8	153	148
Laterale spring stiffness	(N/mm)	C_r	3.710	11.000	9.010
Max. speed	(1/min)	n	22.000	16.000	9.000

Ordering example

BKE / 20 / 15 / 22 / XX

- Model
- Series / Nm
- Ø DM H7 (fixed with the measurement shaft)
- Ø D1/2 H7
- Non-standard

ETH messtechnik gmbh Hagstrasse 10 D-74417 Gschwend Tel.: +49(0)7972-9310-0 Fax: -50 www. eth-messtechnik.de info@eth-messtechnik.de