

PHILIPS

Professional lighting

innovation ✨ you

Professional SmB Catalogue

2 0 2 5 - 2 6

Philips LED lighting

Leading the market today,
transforming the future.

We are at the forefront of today's market, paving the way for a transformative future. Our expertise lies in designing, developing, and manufacturing LED lighting products, leading to an extensive intellectual property portfolio and over 20,000 number of patents. Strengthening our leadership position and driving revenue in the LED lighting market, our solutions cater to various segments such as offices, retail, industries, and public spaces. With cutting-edge technology and top-notch product performance, we proudly earn the trust of lighting specifiers worldwide, shining a confident light on the path ahead.



Content

- 05-69** Indoor professional trade luminaires
- 70-89** Outdoor professional trade luminaires
- 90-93** Solar range
- 94-99** City beautification range
- 100-113** Professional lamps
- 114-115** Driver

Indoor Professional Trade Luminaires

Discover Philips range of energy-efficient indoor professional lighting solutions. Experience the innovative, stylish, and easy to install indoor professional luminaires suitable for use across a wide range of industrial lighting, warehouse lighting, shop lighting, or office lighting applications.

Troffer




IP20 rated product



Surge Protection:
2.5 kV



Efficacy:
100 lumen/watt

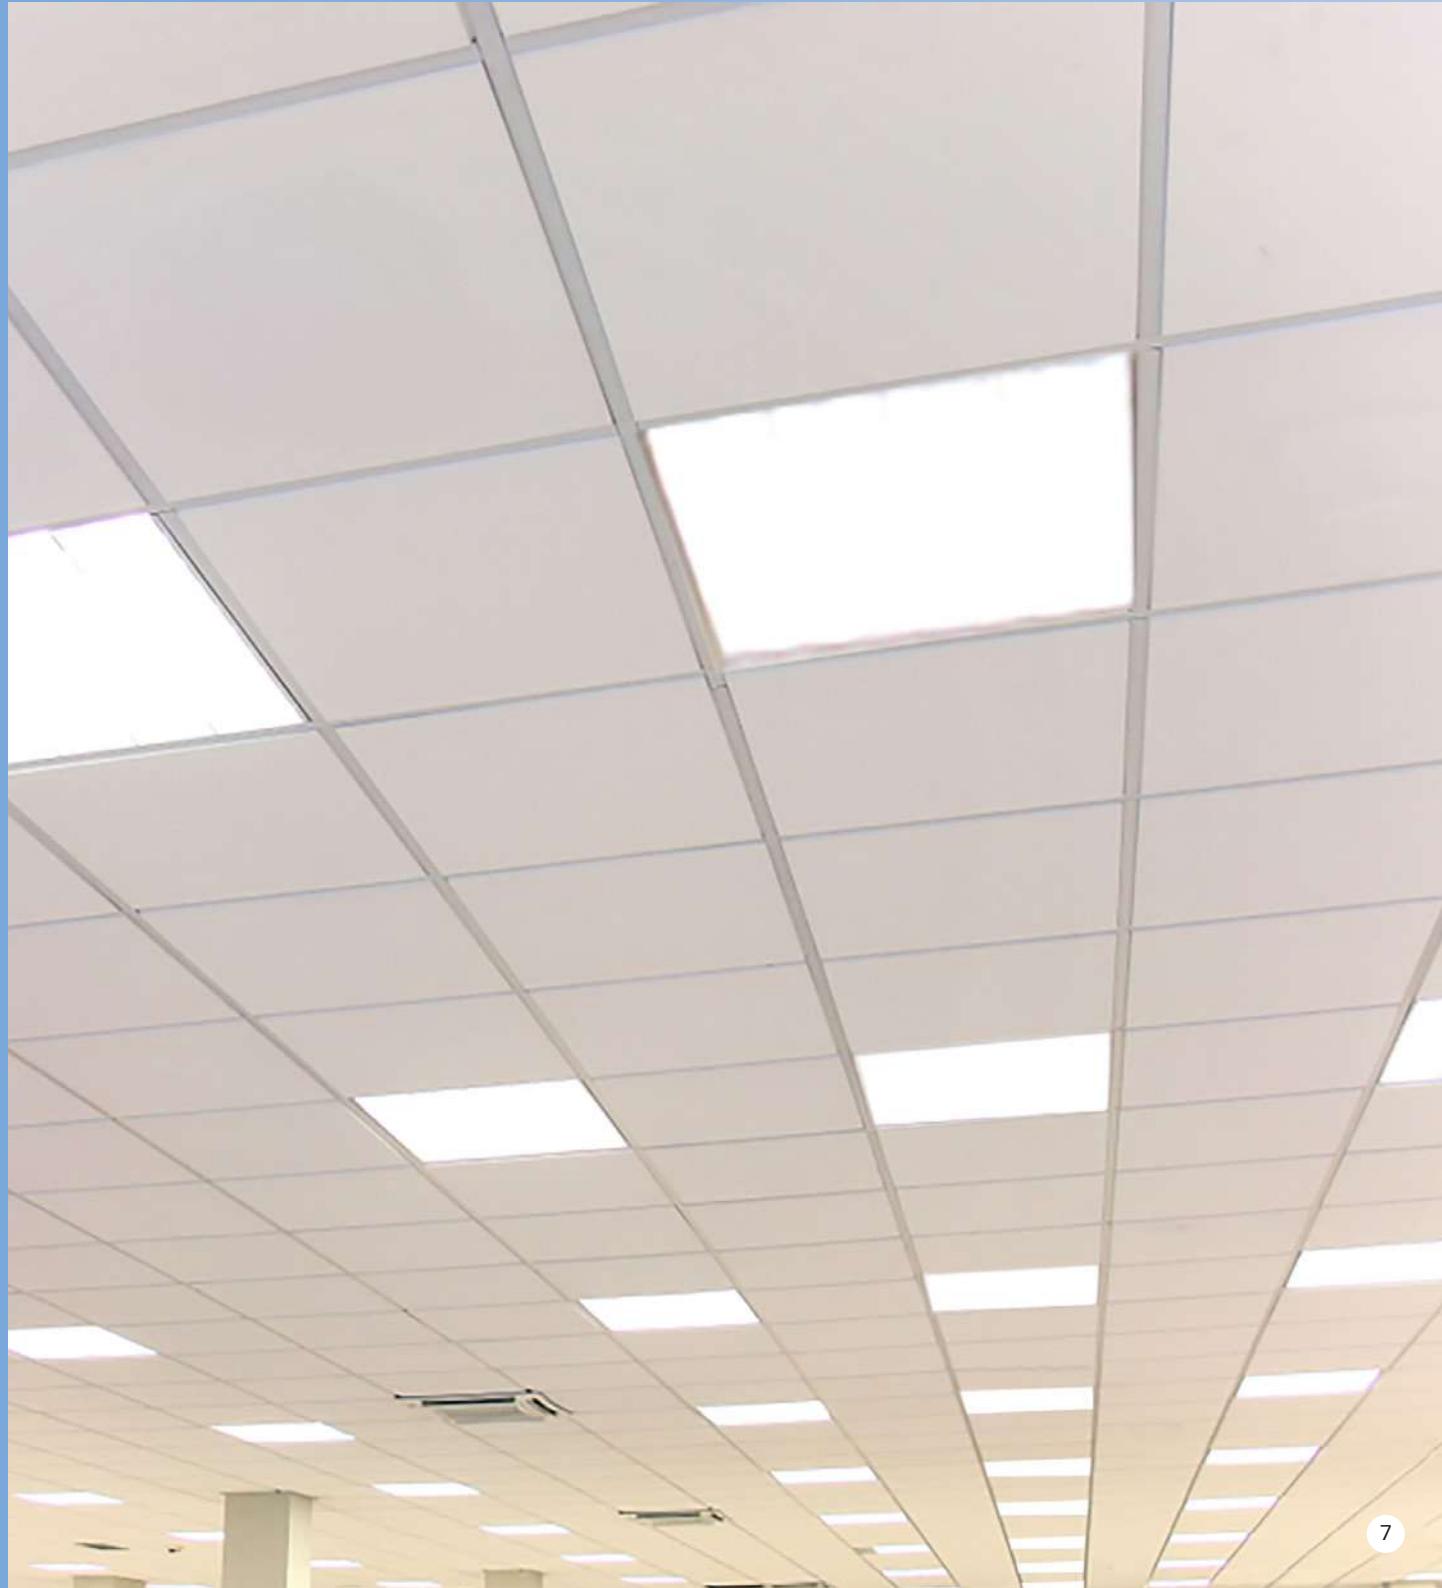

FullGlow Essential 2X2



Model Number	Wattage	Lumen	MRP (₹)
RC360B LED30S L60W60 PSU OD	30W	3000	3200/-
RC360B LED36S L60W60 PSU OD	36W	3600	3500/-
RC360B LED42S L60W60 PSU OD	42W	4200	4000/-

HSN Code: 94051090



Long Life:
25,000 burning hrs



Housing:
CRCA



Energy Efficient:
>100 lumen/watt;
CRI: >80; SDCM: <5



Surge Protection:
2.5 kV;
PF: >0.9



Slim Design:
35mm;
Mounting:
Slot for clip



IP Rating:
IP20

Colors Available:





FullGlow Essential 1x1

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED20S L30W30 PSU OD	20W	2000	2500/-
RC360B LED25S L30W30 PSU OD	25W	2500	2700/-

HSN Code: 94051090



Long Life:
25,000 burning hrs



Housing:
Moulded Plastic



Energy Efficient:
>100 lumen/watt;
CRI: >80; SDCM: <5



Surge Protection:
2.5 kV;
PF: >0.9



Slim Design:
45mm;
Mounting:
Slot for clip



IP Rating:
IP20

Colors Available:



SmartBright Surface 300-1x1

Model Number	Wattage	Lumen	MRP (₹)
SM360B LED20S L30W30 PSU OD	20W	2000	2700/-
SM360B LED25S L30W30 PSU OD	25W	2500	2800/-

HSN Code: 94051090

 **Long Life:**
25,000 burning hrs

 **Housing:**
Moulded Plastic

 **Energy Efficient:**
>100 lumen/watt;
CRI: >80; SDCM: <5

 **Surge Protection:**
2.5 kV;
PF: >0.9

 **Mounting:**
Surface mounting

 **IP Rating:**
IP20

Colors Available:

 NW
4000K

 CW
6500K

12

13

SmartBright Surface 300-2x2



Model Number	Wattage	Lumen	MRP (₹)
SM360B LED30S L60W60 PSU OD	30W	3000	4100/-
SM360B LED36S L60W60 PSU OD	36W	3600	4400/-

HSN Code: 94051090



Long Life:
25,000 burning hrs



Housing:
CRCA



Energy Efficient:
>100 lumen/watt;
CRI: >80; SDCM: <5



Surge Protection:
2.5 kV;
PF: >0.9



Mounting:
Surface
mounting



IP Rating:
IP20

Colors Available:



SmartBright Essential 1x4

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED30S L120W30 PSU OD	30W	3000	3500/-
RC360B LED36S L120W30 PSU OD	36W	3600	3700/-

HSN Code: 94054010



Long Life:
30,000 burning hrs



Housing:
CRCA



Energy Efficient:
>100 lumen/watt;
CRI: >80; SDCM: <5



Surge Protection:
4 kV;
PF: >0.9



Slim Design:
35mm;
Mounting:
Slot for clip



IP Rating:
IP20



Colors Available:



SmartBright Linear Gen 2

Model Number	Wattage	Length	Lumen	MRP (₹)
SP170P LED22S PSU W5L113 OD BK/WH	25W	4 ft.	2200	8000/-
SP170P LED25S PSU W5L113 OD BK/WH	25W	4 ft.	2500	8000/-
SP170P LED50S PSU W5L226 OD BK/WH	50W	8 ft.	5000	14000/-
SP170 W50 AC JB (Joining Accessories)				550/-

HSN Code: 85395000



Long Life:
25,000 burning hrs



Housing:
Extruded aluminium
Color: B/W



Energy Efficient:
>100 lumen/watt;
CRI: >80; SDCM: <5



Surge Protection:
4 kV;
PF: >0.9



Version:
Standalone/
cont.,
suspension
included



IP Rating:
IP20



Colors Available:

Spotlight



Housing:
Metal housing for
better heat dissipation



Surge Protection:
4 kV



Long Life:
25,000 burning
hrs

SmartBright Accent Adjustable

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
RS262B LED6S PSU MB WH S1	6W	75mm	600	1650/-
RS262B LED10S PSU MB WH S1	10W	75mm	1000	2020/-
RS262B LED15S PSU MB WH S1	15W	90mm	1500	3540/-
RS262B LED20S PSU MB WH S1	20W	90mm	2000	4100/-
RS262B LED30S PSU MB WH S1	30W	120mm	3000	4630/-
RS262B LED40S PSU MB WH S1	40W	140mm	4000	4800/-

HSN Code: 94051090



Voltage Range:
140V-270V;
THD: <10%



CRI: >80



Operating Temp:
-10 °C to 35 °C



Wattages:
6W-40W



Surge Protection:
3.5 kV;
PF: >0.9



Beam Angle:
36°



Colors Available:

**WW
3000K**



**NW
4000K**

**CW
6500K**

SmartBright Accent Wall Washer

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
RS263B LED8S PSU	8W	80mm	800	2020/-
RS263B LED15S PSU MB	15W	95mm	1500	3030/-
RS263B LED20S PSU MB	20W	117mm	2000	3920/-
RS263B LED36S PSU MB	36W	151mm	3600	4900/-

HSN Code: 94051090



Voltage Range:
140V-270V;
THD: <10%



CRI: >80



Operating Temp:
-10 °C to 45 °C



Wattages:
8W-36W



Surge Protection:
4 kV;
PF: >0.9



Beam Angle:
36°



Colors Available:

Sky COB Tiltable



Model Number	Wattage	Cutout size	Lumen	MRP (₹)
7W Sky COB Tilt LED Spotlight	7W	80mm	560	1500/-
12W Sky COB Tilt LED Spotlight	12W	88mm	960	2000/-
18W Sky COB Tilt LED Spotlight	18W	120mm	1440	3000/-
22W Sky COB Tilt LED Spotlight	22W	137mm	1760	4000/-

HSN Code: 94051090



Voltage Range:
160V-360V;
THD: <10%



CRI: >80



Operating Temp:
-10 °C to 45 °C



Wattages:
7W-22W



Surge Protection:
2.5 kV;
PF: >0.9



Beam Angle:
36°

Colors Available:





AccentSpot

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
30W Accent Spot	30W	120mm	2250	3995/-

HSN Code: 94051090



Voltage Range:
140V-270V;
THD: <10%



CRI: >80



Operating Temp:
-10 °C to 45 °C



Wattages:
8W-36W



Surge Protection:
4 kV;
PF: >0.9



Beam Angle:
36°



**WW
3000K**



**NW
4000K**



**CW
6500K**

Colors Available:

Essential SmartBright Cylinder Spot



Model Number	Wattage	Diameter	Lumen	MRP (₹)
SP320P LED10S PSU BK/WH	10W	55mm	1000	4050/-
SP320P LED15S PSU BK/WH	15W	75mm	1500	4500/-
SP320P LED20S PSU BK/WH	20W	95mm	2000	5560/-
SP320P LED30S PSU BK/WH	30W	115mm	3000	8210/-

HSN Code: 94051090



Voltage Range:
140V-270V;
THD: >10%



CRI: >80
Beam: NB & MB



Operating Temp:
-10 °C to 45 °C



Wattages:
10W-30W
Color: B/W



Surge Protection:
2.5 kV;
PF: 0.9



Housing: Aluminium
Mounting:
Suspended/Surface

Colors Available:



Essential SmartBright G2 Projector

Model Number	Wattage	Dimensions	Lumen	MRP (₹)
ST033T G2 LED8	10W	49 X 185 X 95mm	850	4800/-
ST033T G2 LED17	20W	65 X 205 X 95mm	1700	5500/-
ST033T G2 LED25	33W	76 X 225 X 95mm	2805	7100/-
(Accessories) RCS033 1C L 1000 BK/WH (Track)	-----	-----	-----	3000/-
(Accessories) RCS033 1C L 2000 BK/WH (Track)	-----	-----	-----	5000/-



HSN Code: 94051090



Long Life:
30,000 burning hrs



Surge Protection:
3 kV



Operating Temp:
-20 °C to 45 °C



Energy Efficient:
>80 lumen/watt;
CRI: >90



IP Rating: IP20;
Impact Resistance:
IK03



Housing: Metal;
Color:
White/Black

Colors Available:



Strip Light




Long Life:
20,000 burning
hrs



Housing:
Superior adhesive
for easy and worry-free
installation



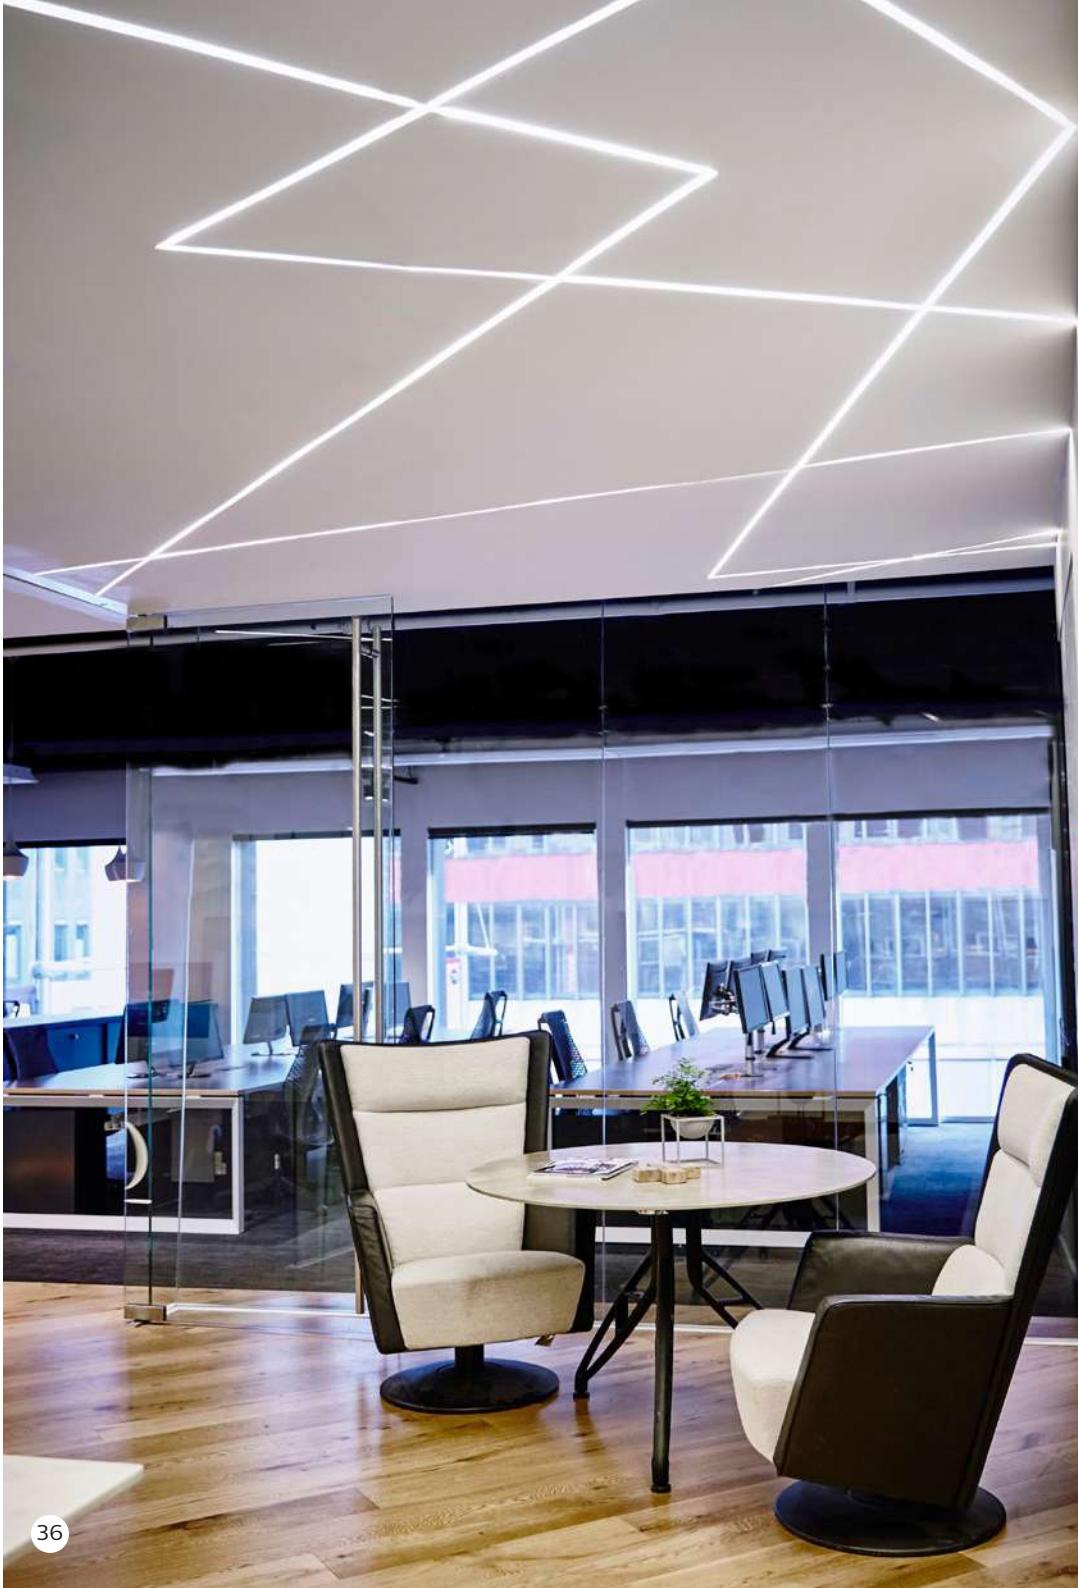

Profile Strip -238LED 24V Strip

Model Number:	Wattage	Lumen	MRP (₹)
24V 238LED 5m Strip	60W	5500	2250/-
CV LED Driver 60W 24V 2.5A (Accessories)	60W		999/-

HSN Code: 94051100



Multiple Wattage Driver:
Available



Suitable
for Cove
and Profile



Uniform light
output due to less
voltage drop



No over
heating



CRI: >80



Higher
Efficiency

Colors Available:



WW
3000K



NW
4000K



CW
6500K

Downlights



Long Life:
30,000 burning hrs



Mounting:
Surface/wall mounted LED downlight for multipurpose utility



Voltage Range:
140V-270V with surge protection of 2.5kV



SkyGlow Next-Gen Downlight

Model Number	Cutout	Dimension	Wattage	Lumen	MRP (₹)
6W Sky Glow Next Gen LED DL	R & SQ 75 mm	108 x 108 x 21mm	6W	600	600/-
12W SkyGlow Next Gen LED DL	R & SQ 110 mm	130 x 130 x 21mm	12W	1200	845/-
15W SkyGlow Next Gen LED DL	R & SQ 140 mm	160 x 160 x 21mm	15W	1500	1000/-
18W SkyGlow Next Gen LED DL	R & SQ 140 mm	160 x 160 x 21mm	18W	1800	1070/-

HSN Code: 94054010



Long Life:
30,000 burning hrs



Housing:
PC



Energy Efficient:
>100 lumen/watt



Surge Protection:
2 kV



Shapes:
Round/Square



Voltage Range:
160V-360V

Colors Available:



GreenPerform Sleek G2



Model Number	Wattage	Cutout size	Lumen	MRP (₹)
DN295B LED6S PSE WH	5.5W	125mm	600	1400/-
DN295B LED10S PSE WH	9W	125mm	1000	1700/-
DN296B LED12S PSE WH	11W	150mm	1200	2100/-
DN296B LED15S PSE WH	13.5W	150mm	1500	2500/-
DN296B LED20S PSE WH	18W	150mm	2000	3000/-

HSN Code: 94054010



Long Life:
30,000 burning hrs



Housing:
Diecast Aluminium



Energy Efficient:
>110 lumen/watt,
CRI: >80



Surge Protection:
>2.5 kV



Sleek Design



Voltage Range:
160V-270V

Colors Available:





GreenLED Plus

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
DN171 7.5 S LED DL G2	7.5W	115/165mm	750	760/-
DN172 12.5 S LED DL G2	12.5 W	115/165mm	1250	960/-
DN172 15 S LED DL G2	15W	115/165mm	1500	1060/-
DN172 18S LED DL G2	18W	115/165mm	1800	1160/-
DN176 7.5 S LED DL G2	7.5W	103/148mm	750	760/-
DN177 12.5 S LED DL G2	12W	103/148mm	1250	960/-
DN177 15 S LED DL G2	15W	103/148mm	1500	1060/-
DN177 18S LED DL G2	18W	103/148mm	1800	1160/-

HSN Code: 94054010



Long Life:
25,000 burning hrs



Housing:
Pressure Diecast



Energy Efficient:
>100 lumen/watt,
CRI: >80



Surge Protection:
>2.5 kV



Shapes:
Round/Square



Voltage Range:
160V-270V

Colors Available:





Surface Glow

Model Number	Cutout	Dimensions	Wattage	Lumen	MRP (₹)
SM240C LED12S PSU WH	127mm	121x36mm	12W	1200	1400/-
SM241C LED15S PSU WH	152.4mm	177x36mm	15W	1500	1900/-
SM241C LED20S PSU WH	152.4mm	177x36mm	20W	2000	2100/-
SM242C LED24S PSU WH	228.6 mm	223x36mm	24W	2400	2600/-

HSN Code: 94054010



Long Life:
30,000 burning hrs



Housing:
Diecast Aluminium



Energy Efficient:
>100 lumen/watt,
CRI: >80



Surge Protection:
4 kV



Voltage Range:
160V-270V



Shapes:
Round/Square


Colors Available:



Surface Glow

Model Number	Cutout	Dimensions	Wattage	Lumen	MRP (₹)
SM240C LED12S PSU WH	127 x 127mm	121x41mm	12W	1200	1600/-
SM241C LED15S PSU WH	152.4 x 152.4mm	177x41mm	15W	1500	2300/-
SM241C LED20S PSU WH	152.4 x 152.4mm	177x41mm	20W	2000	2600/-
SM242C LED24S PSU WH	228.6 x 228.6 mm	223x41mm	24W	2400	3100/-

HSN Code: 94054010



Long Life:
30,000 burning hrs



Housing:
Diecast Aluminium



Energy Efficient:
>100 lumen/watt,
CRI: >80



Surge Protection:
4 kV



Voltage Range:
160V-270V



Shapes:
Round/Square

Colors Available:



Bulkhead




Long Life:
25,000 burning
hrs



Housing:
Pressure diecast
housing



IP Rating:
Dust and waterproof

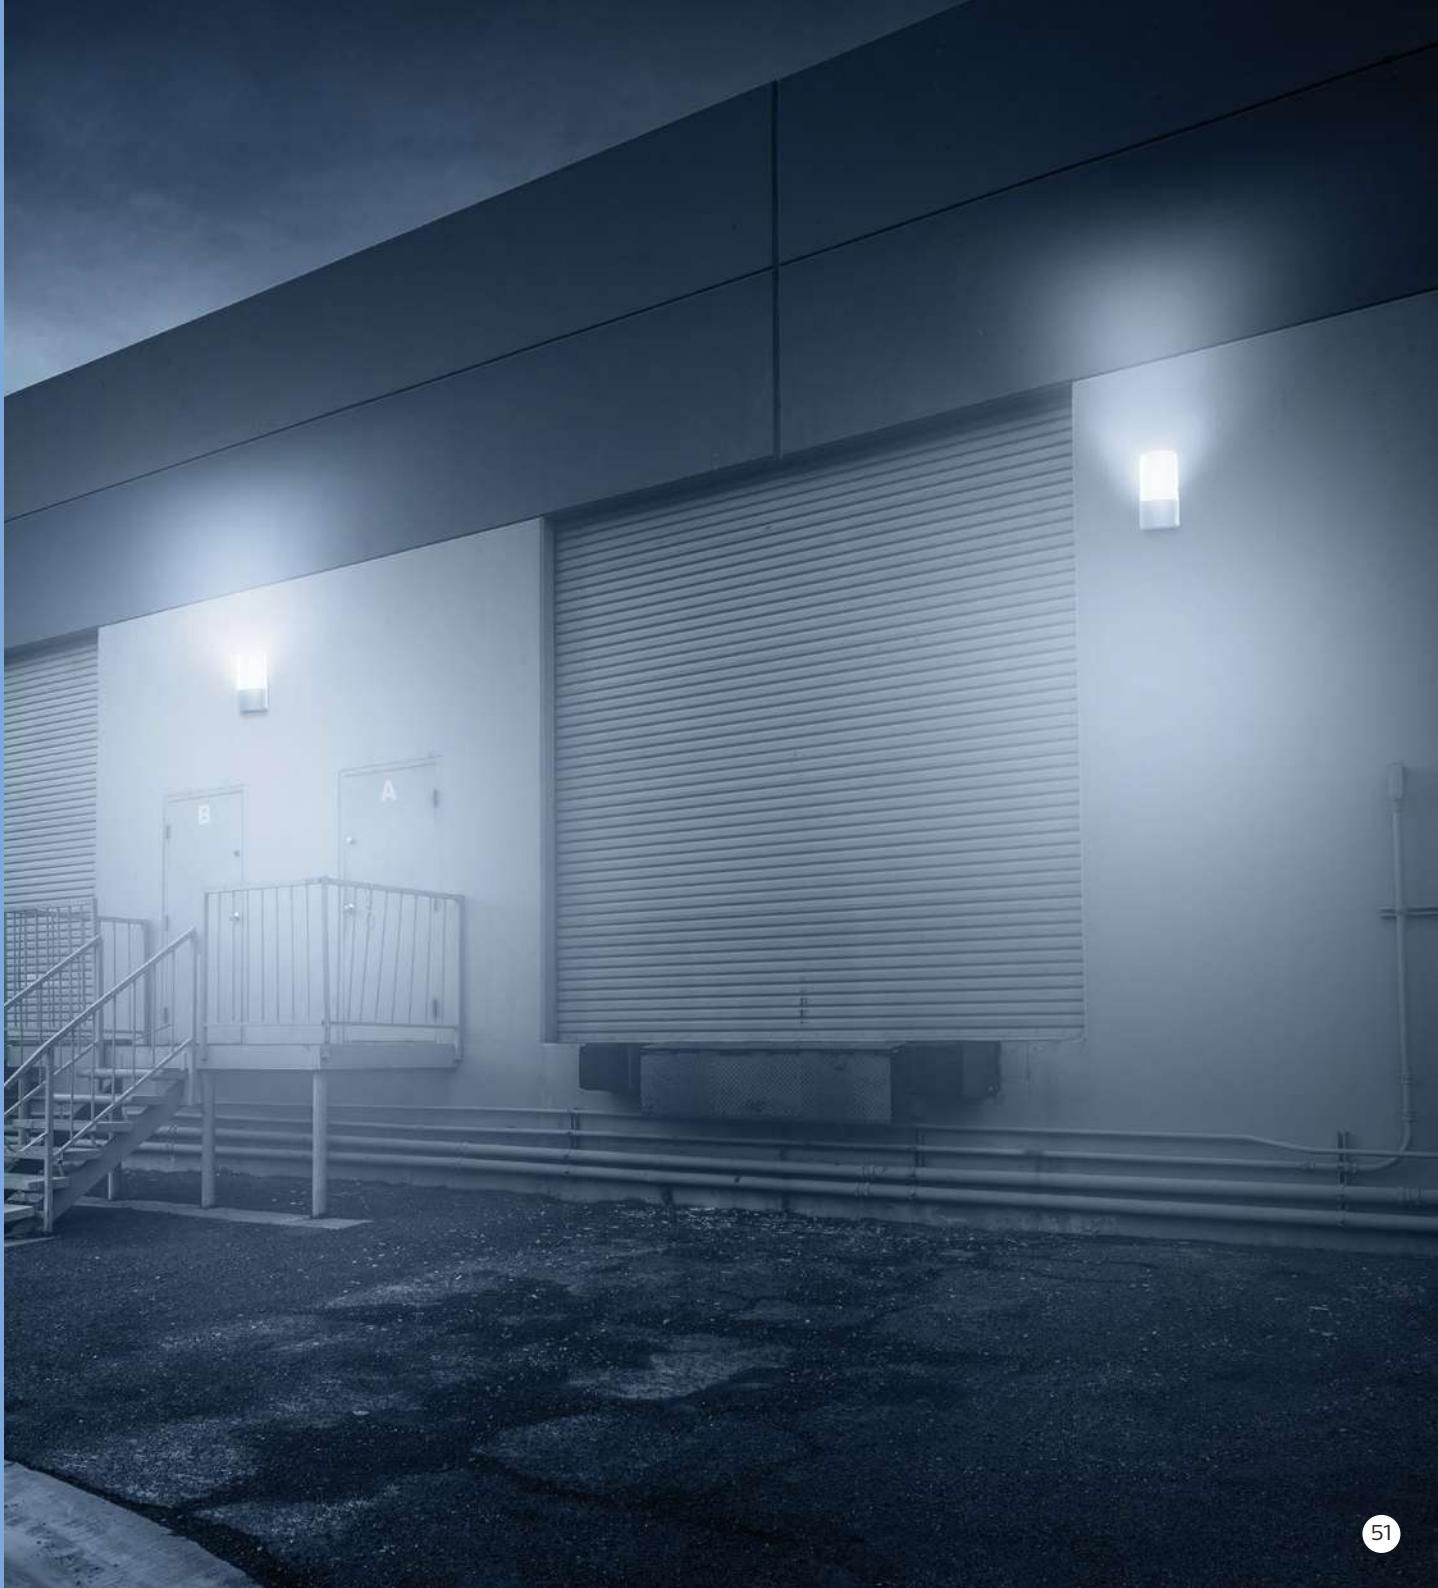

VistaGlow



Model Number	Wattage	Lumen	MRP (₹)
WT140W LED7S PSU S1 PC	6.5W	700	1600/-
HSN Code: 94051090			



Long Life:
25,000 burning hrs



Housing:
PDC



Energy Efficient:
110 lumen/watt



IP Rating: Dust and waterproof;
Impact Resistance
(Vandal proof)

Colors Available:





Vista Glow Essential Bulkhead Gen 2

Model Number	Wattage	Lumen	MRP (₹)
WT090W LED10S PSU PC	10W	1000	900/-
WT090W LED18S PSU PC	18W	1800	1100/-

HSN Code: 94051090



Long Life:
20,000 burning hrs



Housing:
PVC



Energy Efficient:
100 lumen/watt



IP Rating: IP65;
Impact Resistance:
IK08

Colors Available:



Highbay



Voltage Range:
140V-270V with surge
protection of 4kV



Wide Beam:
90°/WB



Housing:
PDC





SmartBright LED Highbay

Model Number	Wattage	Lumen	MRP (₹)
BY130P LED100S PSU GR WB	100W	10000	11000/-
BY130P LED120S PSU GR WB	120W	12000	13000/-

HSN Code: 94051100



Voltage Range:
140V-270V



Housing:
PDC



IP Rating:
IP65



Surge Protection:
4 kV; PF: >0.95



Wide Beam:
900/WB



**Potted
Driver**

Colors Available:



Batten



Long Life:
25,000 burning hrs



Voltage Range:
140V-270V



Housing:
Extruded aluminum housing
(enhances safety) with high
quality polycarbonate diffuser





SmartBright Extra Batten

Model Number	Wattage	Lumen	MRP (₹)
BN 021 LED40S PSU GR-V2	40W	4000	800/-
BN 021 LED50S PSU GR-V2	50W	5000	870/-

HSN Code: 94051090

110 Lm/w with 20000 burning hours

SmartBright Batten

Model Number	Wattage	Lumen	MRP (₹)
BN021 LED12S PSU GR	12W	1200	570/-
BN021C LED22S PSU GR	22W	2200	850/-

HSN Code: 94051090



Long Life:
25,000 burning hrs



Housing:
Extruded aluminum



Energy Efficient:
>110 lumen/watt;
CRI: >80



Voltage Range:
140V-270V

Colors Available:



Waterproof Batten




Long Life:
30,000 burning hrs



Housing:
Polycarbonate
housing and SS hardware



IP Rating:
Dust and waterproof
LED luminaire

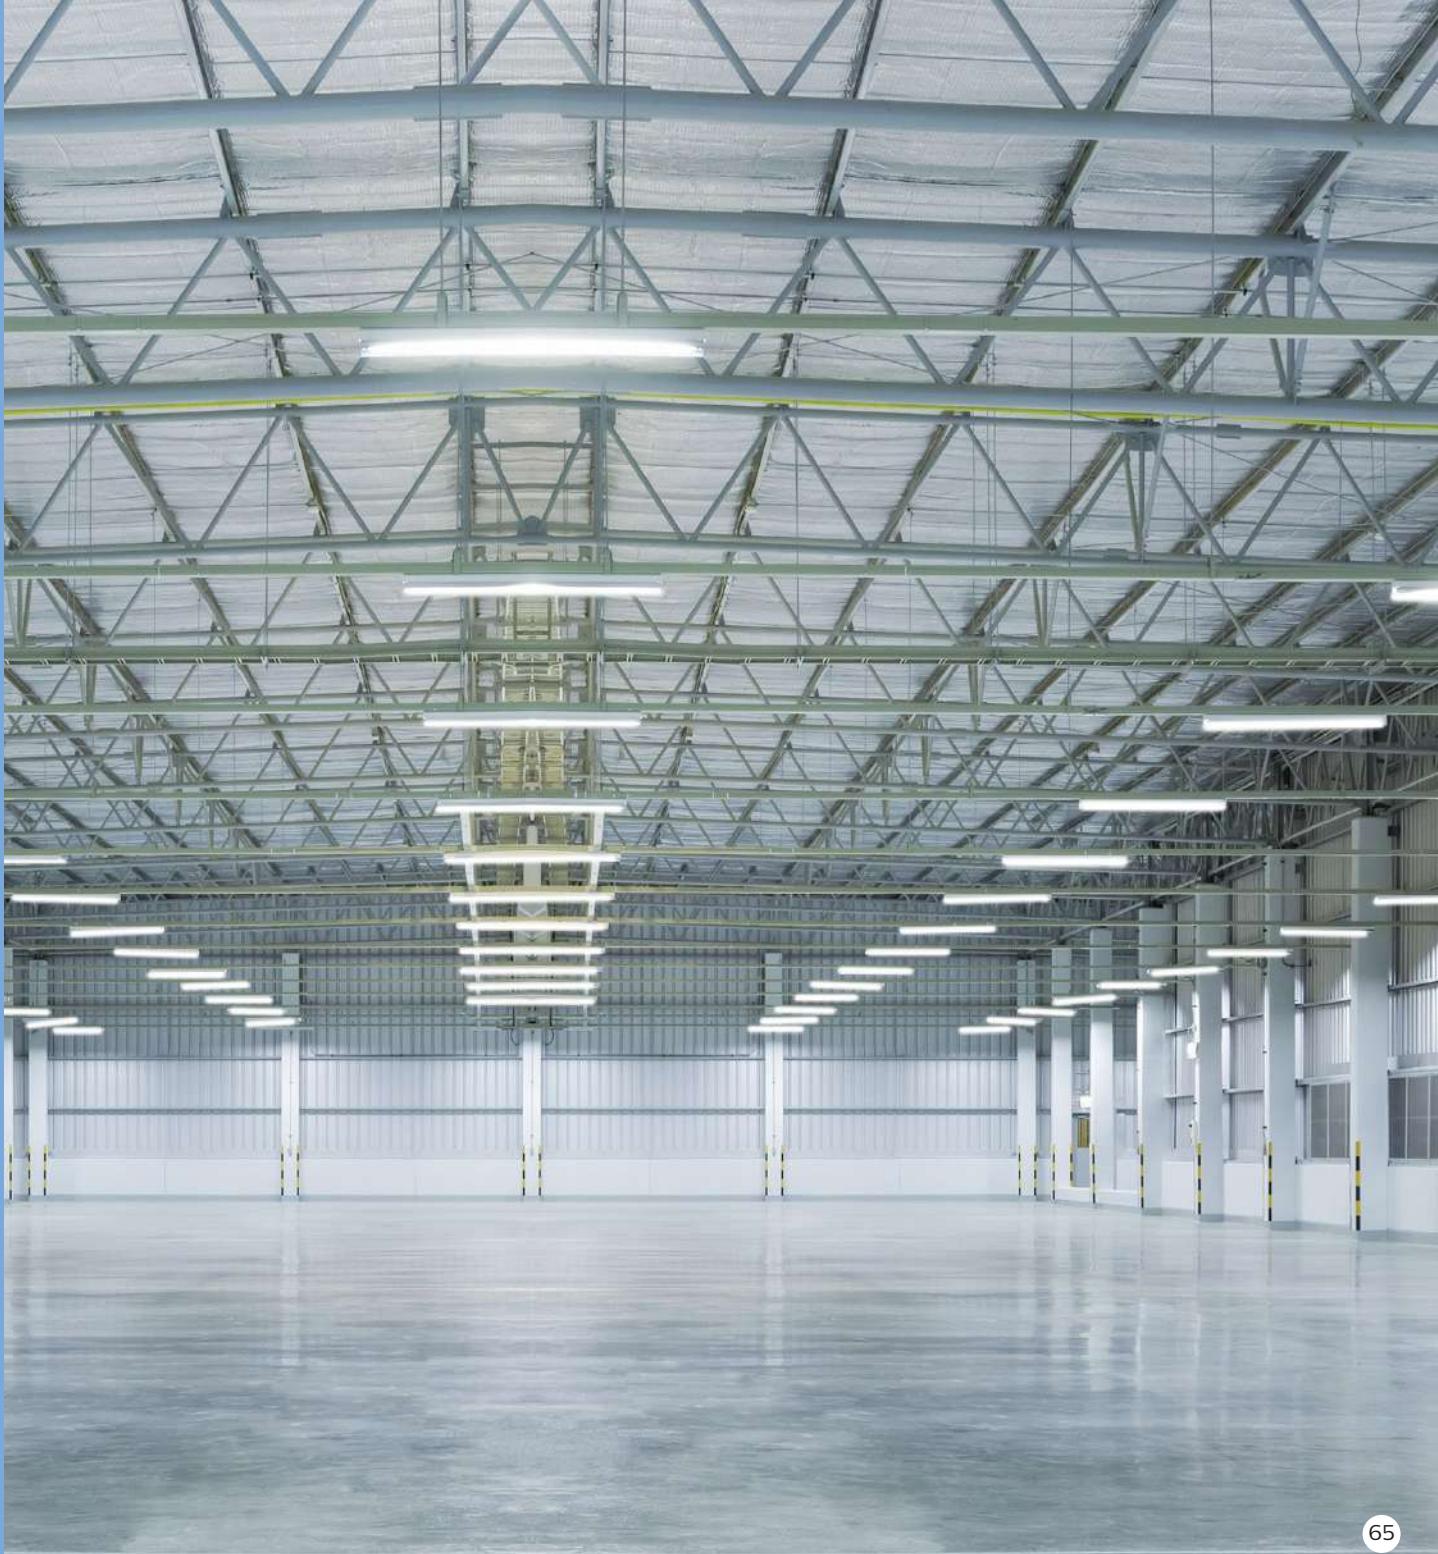



Essential SmartBright SQ

Model Number	Wattage	Length	Lumen	MRP (₹)
WT068C LED18 L600 PSU IN	15W	2 Ft.	1800	2100/-
WT068C LED40 L1200 PSU IN	30W	4 Ft.	4000	3100/-
WT068C LED56 L1500 PSU IN	46.5W	5 Ft.	5600	4000/-

HSN Code: 94051100



Long Life:
30,000 burning hrs



Housing:
PC



Voltage Range:
140V-270V;
THD: <20%



Surge Protection: 4 kV



Energy Efficient:
>120 lumen/watt;
CRI: >80;



IP Rating: IP66;
Impact Resistance:
IK07

Colors Available:





SmartBright Waterproof

Model Number	Wattage	Length	Lumen	MRP (₹)
WT150C LED20S	16W	2 Ft.	2000	2800/-
WT150C LED40S	34W	4 Ft.	4000	3800/-

HSN Code: 94051100



Long Life:
30,000 burning hrs



Housing:
PC



Voltage Range:
140V-270V;
THD: <20%



Mounting:
Wall/Suspended
Mounting



Energy Efficient:
>120 lumen/watt



IP Rating: IP65;
Impact Resistance:
IK08

Colors Available:



Outdoor Professional Trade Luminaires

Discover Philips selection of easy-to-install outdoor professional luminaires. The LED outdoor lighting products are designed to be energy-efficient and economical, and are suitable for a range of commercial and industrial applications.



Flood



Long Life:
25,000 burning hrs



Housing:
Diecast aluminum



Surge Protection:
4 kV



SmartBright Essential Pro

Model Number	Wattage	Lumen	MRP (₹)
BVP210 LED10 10W GR PSU	10W	1000	825/-
BVP211 LED20 20W GR PSU	20W	2000	1100/-
BVP212 LED30 30W GR PSU	30W	3000	2300/-

HSN Code: 000000



Long Life:
20,000 burning hrs



Housing:
PDC



Energy Efficient:
>100 lumen/watt;
CRI: >70



Surge Protection: 4 kV;
PF: >0.95



IP Rating:
IP66

Colors Available:



WW
3000K



CW
6500K

SmartBright Essential Pro

Model Number	Wattage	Lumen	MRP (₹)
BVP213 LED50 50W GR PSU	50W	5000	3300/-
BVP214 LED70 70W GR PSU	70W	7000	4300/-

HSN Code: 000000



 Long Life:
20,000 burning hrs

 Housing:
PDC

 Energy Efficient:
>100 lumen/watt;
CRI: >70

 Surge
Protection: 4 kV;
PF: >0.95

 IP Rating:
IP66

Colors Available:



SmartBright Essential Pro

Model Number	Wattage	Lumen	MRP (₹)
BVP215 LED100 GR PSU	100W	10000	6000/-
BBVP216 LED150 WB GR PSU	150W	15000	10000/-
BVP217 LED200 WB GR PSU	200W	20000	13000/-

HSN Code: 000000



Long Life:
20,000 burning hrs



Housing:
PDC



Energy Efficient:
>100 lumen/watt;
CRI: >70



Surge Protection:
4 kV;
PF: >0.95



IP Rating:
IP66

Colors Available:



SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP173 LED55 FG GR PSU	50W	5500	5000/-
BVP174 LED77 FG GR PSU	70W	7700	7000/-

HSN Code: 94054090



 **Long Life:**
25,000 burning hrs

 **Housing:**
PDC

 **Energy Efficient:**
>110 lumen/watt

 **Surge Protection:** 4 kV;
PF: >0.95

 **IP Rating:** IP65;
Impact Resistance: IK07

 **Class B Serviceability:**
Potted driver

Colors Available:



SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP175 LED110 FG GR PSU	100W	11000	9500/-
BVP176 LED165 WB FG GR PSU	150W	16500	14000/-
BVP177 LED220 WB FG GR PSU	200W	22000	18000/-

HSN Code: 94054090



Long Life:
25,000 burning hrs



Housing:
PDC



Energy Efficient:
>110 lumen/watt



Surge Protection: 4 kV;
PF: >0.95



IP Rating: IP65;
Impact Resistance: IK07



Class B Serviceability:
Potted driver

Colors Available:



Street



Long Life:
25,000 burning hrs



Housing:
Pressure diecast



Surge Protection:
Up to 4 kV



IP Rating: IP65;
**Impact
Resistance:** IK07





SmartBrite Streetlight

Model Number	Wattage	Lumen	MRP (₹)
BRP029 LED25 SLR GR PSU V1	25W	2500	2400/-
BRP030 LED35 MR PSU GR V1	35W	3500	3000/-
BRP030 LED45 MR PSU GR V1	45W	4500	4200/-
BRP031 LED66 SLR GR PSU	60W	6600	4700/-
BRP031 LED77 SLR GR PSU V1	70W	7700	5500/-
BRP032 LED100 SLR GR PSU V1	90W	9900	7800/-
BRP032 LED110 SLR GR PSU V1	100W	11000	8600/-
BRP033 LED132 SLR GR PSU V1	120W	13200	10000/-

HSN Code: 94054090



Long Life:
25,000 burning hrs



Housing:
PDC



Energy Efficient:
>110 lumen/watt



Surge Protection: 4 kV;
PF: >0.90



IP Rating: IP65;
Impact Resistance: IK07



Class B
Serviceability:
Potted driver

Colors Available:





SmartBrite Streetlight Essential Neo

Model Number	Wattage	Lumen	MRP (₹)
BRP023 LED25 PC GR PSU	25W	2500	1200/-
BRP024 LED35 PC GR PSU	35W	3500	1450/-
BRP024 LED50 PC GR PSU	50W	5000	1850/-

HSN Code: 94054090



Long Life:
25,000 burning hrs



Housing:
PC



Energy efficient:
≥100 lumen/watt;
CRI: 70



Surge Protection:
4 kV



IP Rating:
IP66



Voltage Range:
140V-270V

Colors Available:



Solar Range

Solar lighting, apart from being free and renewable, has several other benefits. Philips range of solar lighting solutions brings light to areas without access to electric grid. The sturdy and durable Philips solar lighting range not only saves energy and is environment-friendly, but also preserves the landscape as no trenching for cabling is required in them.





Essential SmartBright Solar AIO

Model Number	Wattage	Lumen	MRP (₹)
BRC010 M LED10/765 solar Pro IN	6.4W	1000	9000/-
BRC010 M LED20/765 solar Pro IN	13.1W	2000	12500/-
BRC010 M LED40/765 solar Pro IN	25W	4000	16500/-
BRC010M Arm 2k 4k lm			1600/-
BRC010M Arm 1k lm			1400/-

HSN Code: 94054100



Long Life:
25,000 burning hrs



Housing:
Metal



Energy Efficient:
150-165 lumen/watt;
CRI: >70



IP Rating:
IP65; Impact
Resistance: IK08



Configurable with
IR Remote



Colors Available:

City Beautification Range

Discover Philips city beautification range and create an identity and brand your city as unique, beautiful, vibrant and secure place. Dynamic and intelligent architectural LED lighting can transform the night scene, enhancing urban architecture and public spaces and creating an inviting ambience for citizens and visitors.



SmartBright Essential Bollard



Model Number	Wattage	Length	Lumen	MRP (₹)
BCP100 LED 10W PSU GR M	10W	600mm	800	8000/-
BCP100 LED 10W PSU GR L	10W	750mm	800	9000/-

HSN Code: 94054010



Voltage Range:
100V-240V



IP65 & IK07
rated product



Bigger dia of 76mm
insuring uniform
diffused light



Long lasting,
sturdy and
refined finish

Colors Available:



Uniscape LED Post Top



Model Number	Wattage	Lumen	MRP (₹)
BGP200 LED26 PSU GR CPC SPD	26W	2600	9000/-
BGP200 LED35 PSU GR CPC SPD	35W	3500	10500/-
BGP200 LED45 PSU GR CPC SPD	45W	4500	13000/-
BGP201 LED26 PSU GR CPC SPD	26W	2600	9000/-
BGP201 LED35 PSU GR CPC SPD	35W	3500	10500/-
BGP201 LED45 PSU GR CPC SPD	45W	4500	13000/-

HSN Code: 94054010



Long Life:
25,000 burning hrs

Housing:
Pressure diecast spigot

Efficacy:
>= 100 lumen/watt

Surge Protection: 4 kV

IP Rating: IP65 & IK07 rated product


Colors Available:



Professional Lamps

Discover Philips range of professional lamps and enjoy a superior quality of light through our energy efficient lighting products, systems and services embracing the beauty of your landscapes.



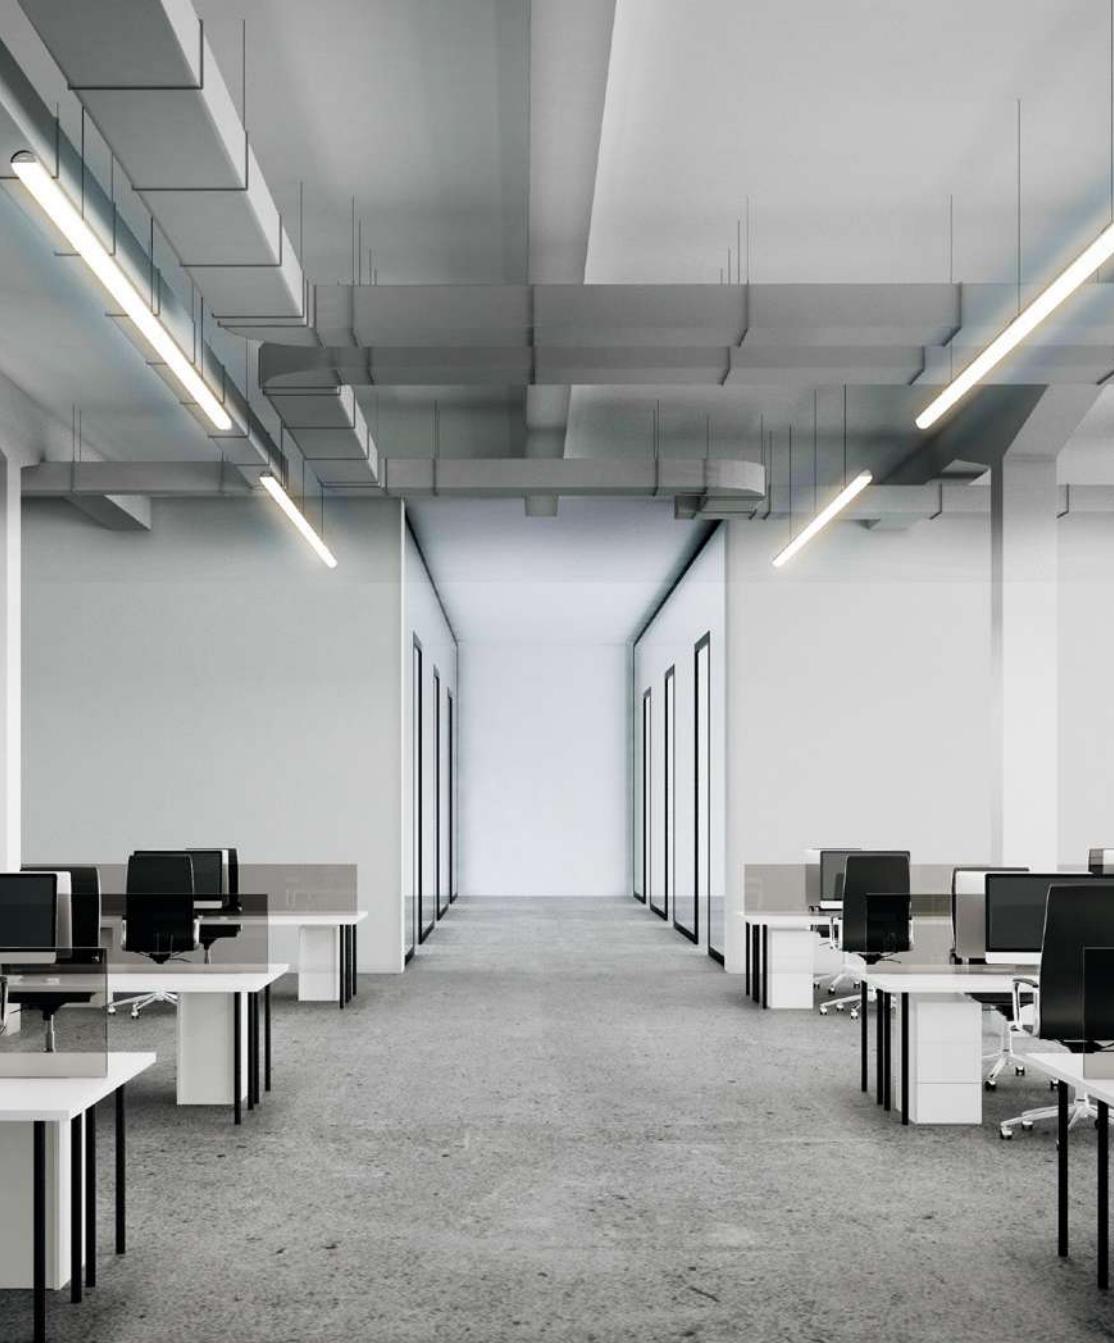

LEDtube PC

Model Number	Wattage	Lumen	MRP (₹)
MAS LEDtube 18W, 2100lm T8 (VE)	18W	2100	700/-

HSN Code: 85395000



Long Life:
40,000 burning hrs



Housing:
Polycarbonate housing with opal finish



Energy Efficient:
≥116 lumen/watt



Surge Protection:
3 kV



Voltage Range:
380V withstands for 2 minutes

Colors Available:





LEDtube Ecofit

Model Number	Wattage	Lumen	MRP ₹)
ECOFIT LEDtube 18W, 2100lm	18W	2100	549/-

HSN Code: 85395000



Long Life:
15,000 burning hrs



Housing:
Polycarbonate housing with opal finish



Surge Protection: 3 kV



Luminosity:
Bright with low glare

Colors Available:



CW
6500K



LEDtube Glass

Model Number	Wattage	Lumen	MRP (₹)
Essential Led tube 20W B2B T8	20W	2200	400/-

HSN Code: 85395000



Long Life:
15,000 burning hrs



Housing:
Perfect replacement
of existing 1200 mm
T8 fluorescent



Surge Protection:
2.5kV

Colors Available:



MAS LEDtube

Model Number	Wattage	Lumen	MRP (₹)
Mas LedTube 30w 4000lm T8	30W	4000	1499/-

HSN Code: 85395000



Long Life:
40,000 burning hrs



Thermal:
Inbuilt aluminum heat sink hence more durable



Surge Protection:
3kV

Colors Available:



LED Spot MR16

Model Number	Wattage	Lumen	MRP (₹)
MR16 4.5-50W	4.5W	400	299/-

HSN Code: 85395000

LED Spot GU10

Model Number	Wattage	Lumen	MRP (₹)
4.6-50W GU10	4.6W	400	399/-

HSN Code: 85395000



Beam angle:
36°

Colors Available:

WW
3000K

CW
6500K



LED PLL

Model Number	Wattage	Lumen	MRP (₹)
LED PLL 18W 6500K 2G11	18W	1800	599/-

HSN Code: 85395000



Long Life:
15,000 burning hrs



Housing :
PVC

Colors Available:





LED Transformer/Driver

Description	Wattage	MRP (₹)
LED Transformer 24W 12V 2A GEN2	24W	400/-
LED Transformer 60W 5A 12VDC MRP	60W	799/-
LED Transformer 120W 10A 12VDC CV	120W	2000/-
LED Transformer 150W 12.5A	150W	3000/-
LED Transformer 300W 25A	300W	4000/-
Certa Drive 40W 1A	40W	TBD
Xitanium 120W 0.7A 240V OEM	120W	TBD
Xitanium 100W 0.7A 240V OEM	100W	TBD
Xitanium 75W 0.7A 240V OEM	75W	TBD
Xitanium 150W 0.7A 240V OEM	150W	TBD
Xitanium 220W 0.7A 240V OEM	220W	TBD

HSN Code: 94059900





Scan to visit the
product website

