




LASER DIODE

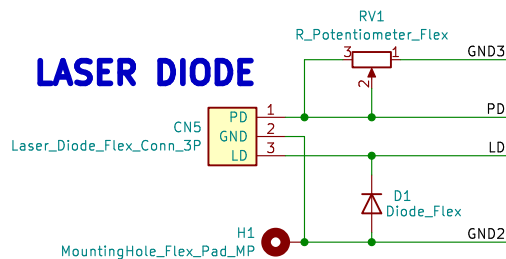


VR and the two Grounds are not actually grounded on the KSS-220 but on the CDR-30 main board. To make things easier, we will ground them on the replacement loom.



PHOTODETECTOR



MAIN-PWR CN102



KSM-220
Optical Pick-Up Block
(1/2)
KSM-162 uses a different Flexible PCB

Sheet: /

File: KSS-220A_Lens_Flex.kicad_sch

Title: KSS-220A Flexible PCB - Lens

Size: A4

Date: 2024-08-17

Rev: 0.1

KiCad E.D.A. 8.0.4

Id: 1/1