


REV	DATE	DESCRIPTION
A	2026-10-29	FIRST ISSUE FROM CAD

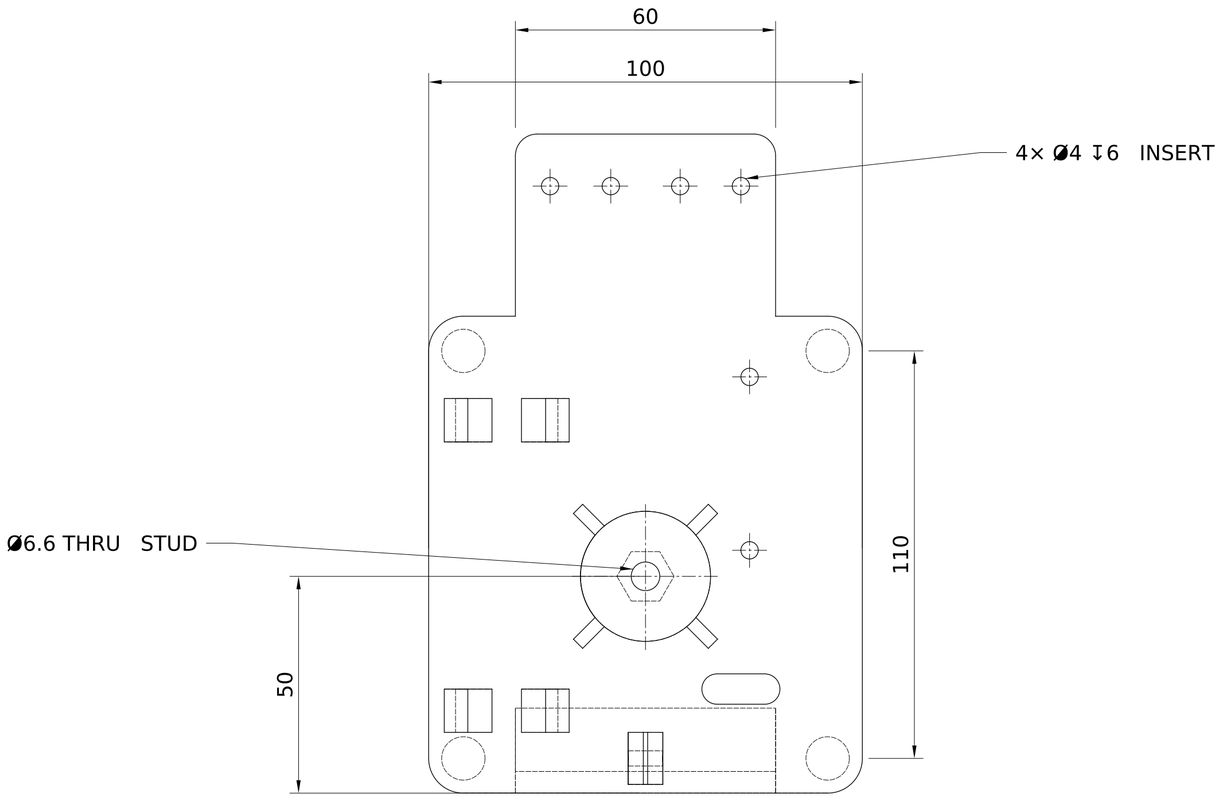


TOP

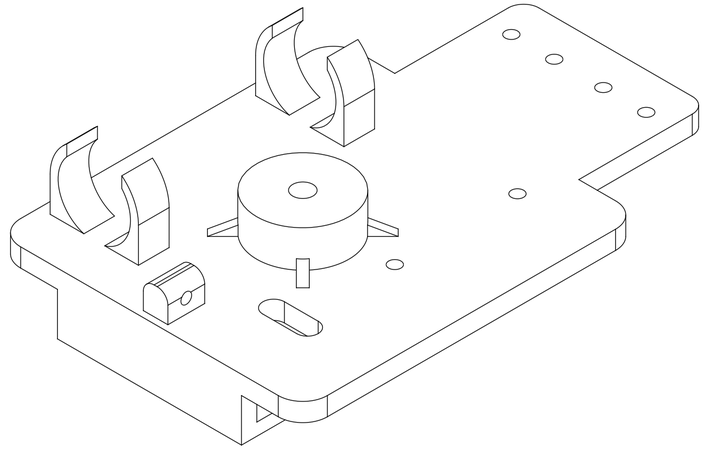

ISOMETRIC

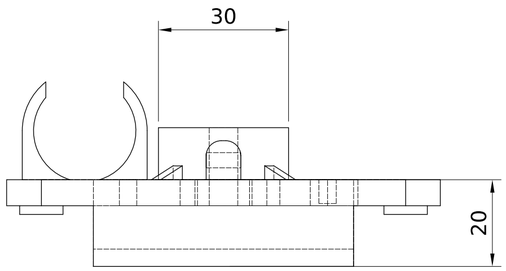

FRONT

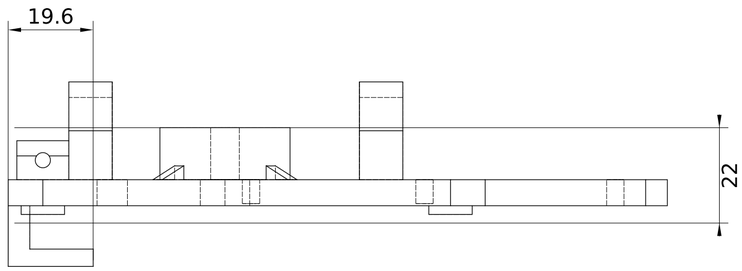


RIGHT


NOTES: 1. TOLERANCES PER ISO 2768-m UNLESS OTHERWISE SPECIFIED.
2. PETG, 4 WALLS, 40% GYROID, 0.2 LAYER. HOOK SIDE DOWN ON TREE SUPPORTS.
3. 1/4-20 HEX NUT PRESSED INTO TRAP FROM BELOW BEFORE STUD.
4. 4x M3 HEAT-SET INSERTS FOR ARMS, 2x FOR POD FLOOR.
5. HOOK SLOT = MEASURED HANDLE BAR + 0.6. MEASURE BEFORE PRINTING.

SADDLE SPINE	SCALE 1:1 MM THIRD ANGLE
900-TP-101 · PETG · KEEL / R. GOLDMAN	SHEET 1 OF 4 REV A keel_printed_parts


REV	DATE	DESCRIPTION
A	2026-10-29	FIRST ISSUE FROM CAD

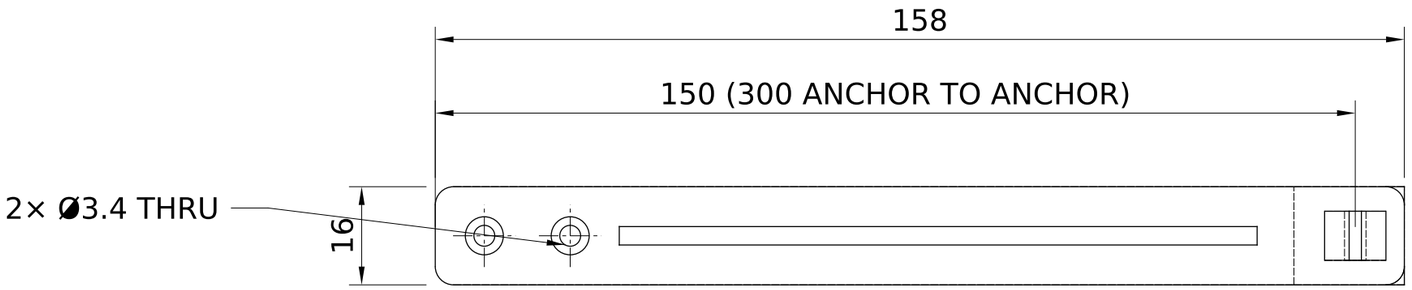


TOP

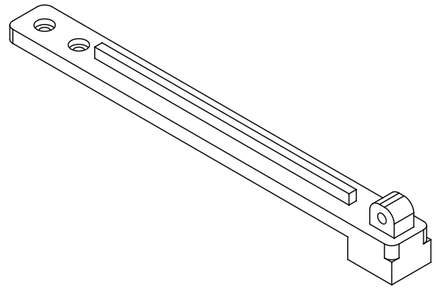

ISOMETRIC 1:1.77

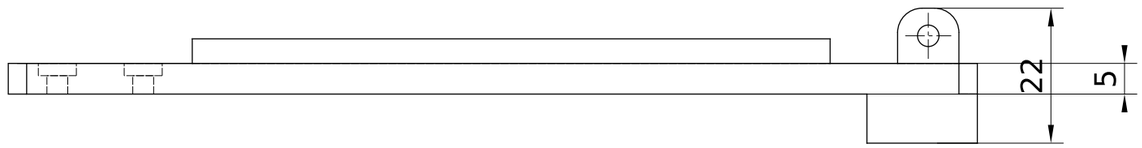

FRONT




RIGHT


NOTES: 1. TOLERANCES PER ISO 2768-m UNLESS OTHERWISE SPECIFIED.
2. PETG, 4 WALLS, 40% GYROID, 0.2 LAYER. PRINT FLAT, NO SUPPORTS.
3. MAKE TWO: ONE AS DRAWN, ONE MIRRORED IN THE SLICER.
4. 2x M3x12 SOCKET HEAD INTO SPINE INSERTS, C'BORE 6.2 DP 2.

SADDLE ARM (R, MIRROR FOR L)	SCALE 1:1 MM THIRD ANGLE
900-TP-102 · PETG · KEEL / R. GOLDMAN	SHEET 2 OF 4 REV A keel_printed_parts


REV	DATE	DESCRIPTION
A	2026-10-29	FIRST ISSUE FROM CAD

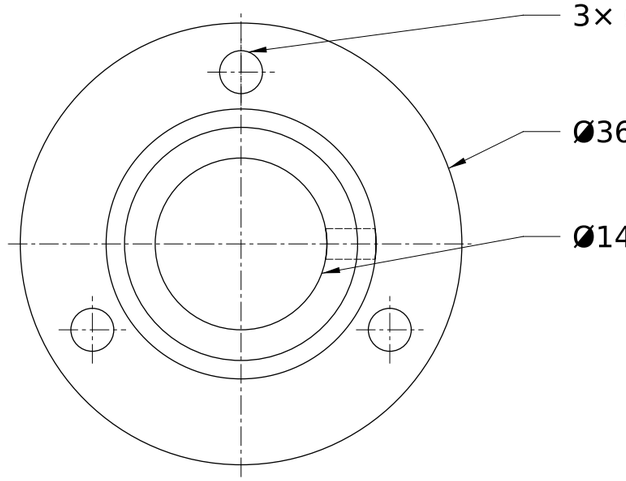


TOP

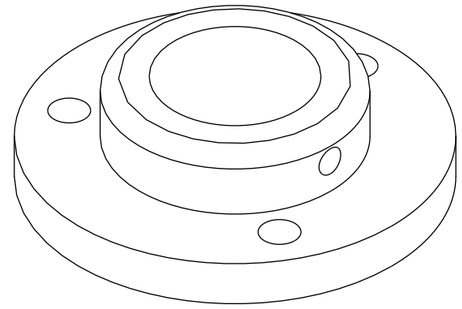

ISOMETRIC



FRONT




RIGHT


NOTES: 1. TOLERANCES PER ISO 2768-m UNLESS OTHERWISE SPECIFIED.
2. PETG, 4 WALLS, 40% GYROID, 0.2 LAYER. FLANGE DOWN.
3. M3 GRUB SCREW LOCKS HEIGHT ON THE STICK.
4. ID TO SUIT BUTT SECTION: STICK OD + 0.4.

GUY RING	SCALE 2:1 MM THIRD ANGLE
900-TP-103 · PETG · KEEL / R. GOLDMAN	SHEET 3 OF 4 REV A keel_printed_parts


REV	DATE	DESCRIPTION
A	2026-10-29	FIRST ISSUE FROM CAD

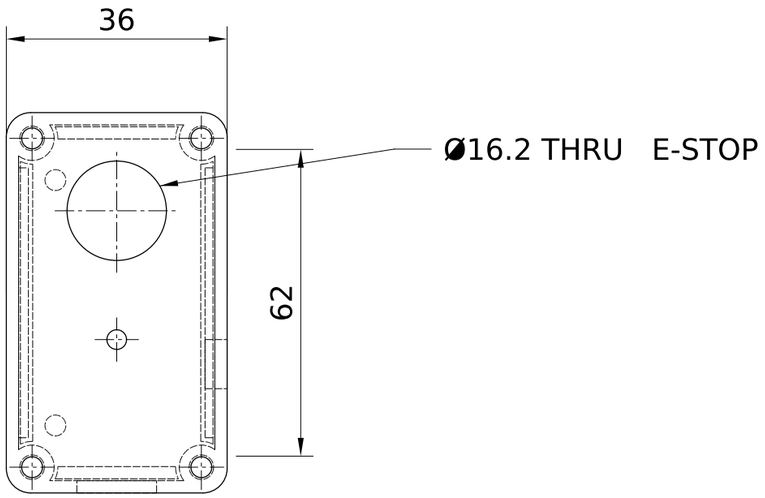


TOP

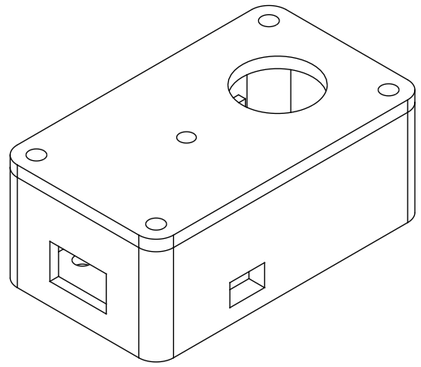

ISOMETRIC



FRONT

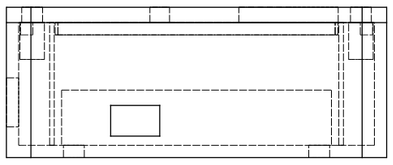

RIGHT

NOTES: 1. TOLERANCES PER ISO 2768-m UNLESS OTHERWISE SPECIFIED.
2. PETG, 4 WALLS, 40% GYROID, 0.2 LAYER. BASE OPEN SIDE UP, LID FLAT.
3. FITS ESP32 DEVKIT V1, 30 PIN, 51.5 x 28.4 BOARD.
4. 16 mm MOMENTARY E-STOP IN LID, NO TO GND (GPIO 4).
5. 4x M3 INSERTS IN BASE BOSSES, 4x M3x8 THROUGH LID.

ELECTRONICS POD, BASE + LID	SCALE 1:1 MM THIRD ANGLE
900-TP-104 · PETG · KEEL / R. GOLDMAN	SHEET 4 OF 4 REV A keel_printed_parts