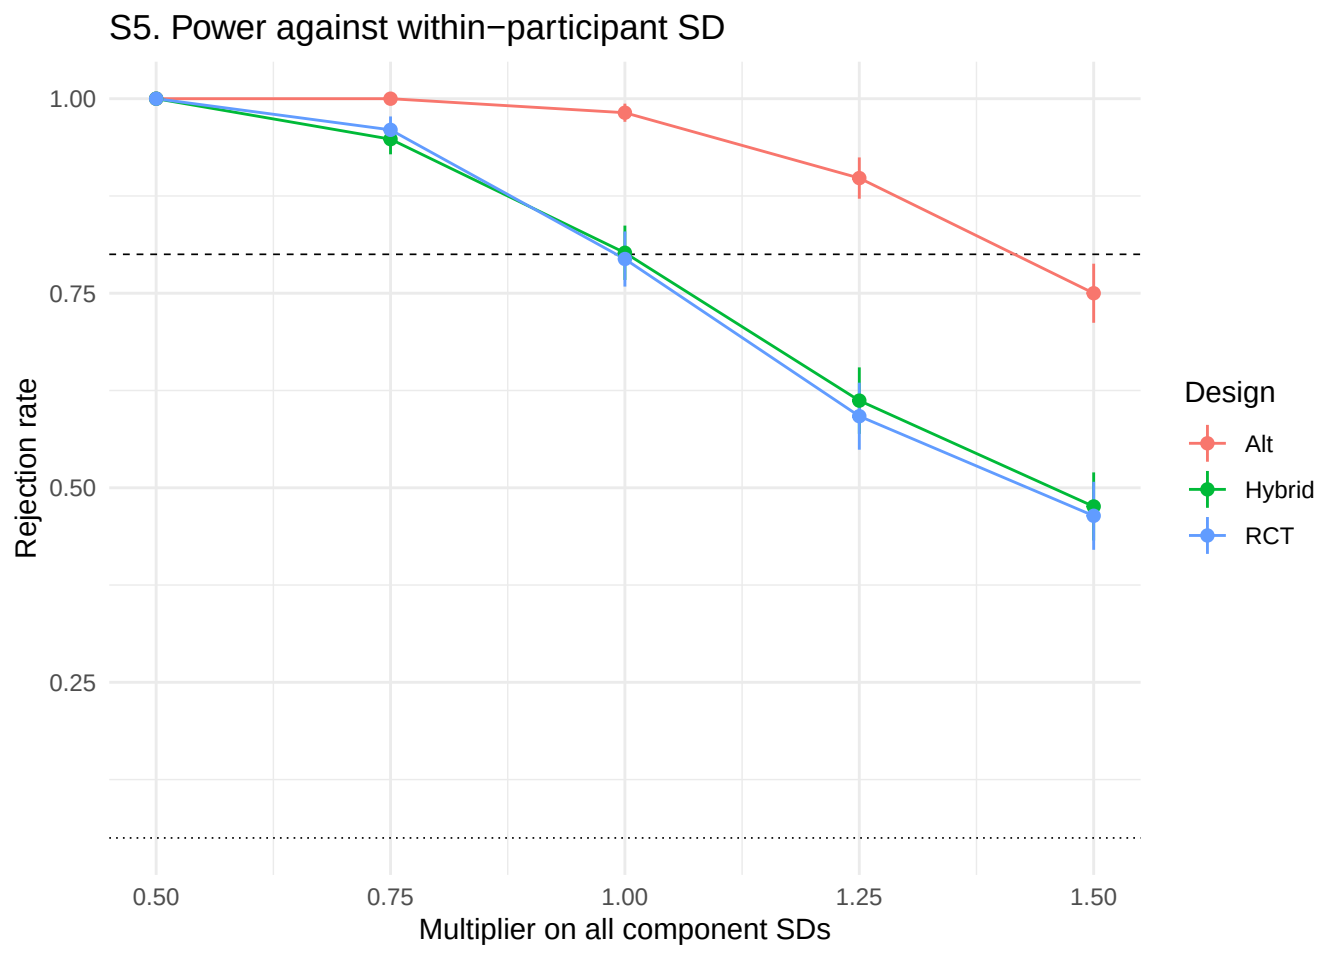
S5. Power against within−participant SD
1.00
0.75
0.50
0.25
Rejection rate
0.50
0.75
1.00
1.25
1.50
Multiplier on all component SDs
Design
Alt
Hybrid
RCT