




Filament Temp Tester

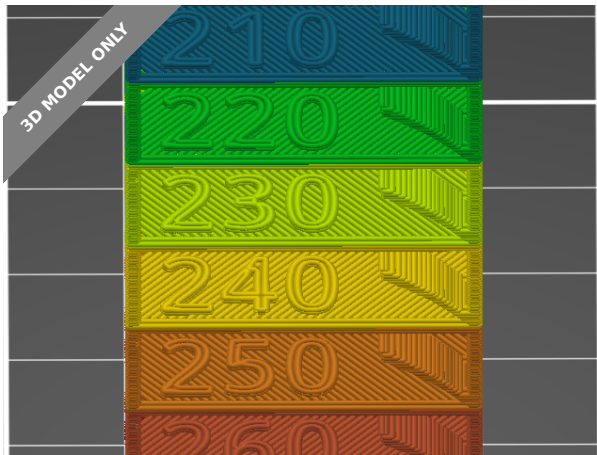

yahbluez

[VIEW IN BROWSER](#)

updated 8. 9. 2023 | published 8. 9. 2023

Summary

Very Fast, only 9g - not wasting filament, ready to be slice by your own, for all slicers, all printers, all filaments.

[3D Printers](#) > [Test Models](#)

Tags: [tpu](#) [abs](#) [pla](#) [temp](#) [temperature](#) [petg](#) [prusaslicer](#) [testmodel](#) [asa](#) [temperaturetower](#) [orca](#) [temptower](#) [bambustudio](#)

TL;DR

Ultimate Temp Tower series, brutal fast and less than 10g of material used, don't guess and hope anymore, **measure** the best temperature for a given printer, filament, nozzle combination.

update 2023.0807

- [swatch cases](#) to store the printed temperature towers



Collection

tools, 3D printing

Motivation

- **Print Quality Optimization:** Different filaments have varying ideal temperature ranges for achieving optimal print quality. By printing a temperature tower, you can systematically test a range of temperatures for a specific filament and identify the temperature at which it produces the best results. This allows you to fine-tune your printing settings and achieve higher-quality prints.
- **Filament Compatibility:** Filaments from different manufacturers or even different batches can exhibit variations in their temperature requirements. The ultimate temperature tower helps you determine the ideal temperature for a particular filament, ensuring compatibility and reducing the risk of failed or subpar prints.
- **Time and Material Efficiency:** Instead of printing multiple test objects or making multiple adjustments to temperature settings during the printing process, a temperature tower allows you to consolidate testing into a single object. This saves time and reduces material waste by providing a comprehensive evaluation of temperature settings in a single print.
- **Overhang and Bridging Performance:** Temperature variations can also affect the performance of overhangs and bridging in 3D prints. By systematically testing different temperatures, you can identify the temperature range that yields the best results for these challenging print aspects, improving overall print quality.
- **So many Filaments:**
<https://help.prusa3d.com/materials>
- **Filament Sampler:** The model is small, stable, and stackable, making it suitable as a filament sampler/swatch that also documents the influence of printing temperature on the filament. This is very important especially with silk PLA filaments.

Let's get started

Be aware that much too high or much too low temperatures may clog your printer's nozzle.

Good way to start is to look at the temp range of your filament spool and then use the test model with that temperature in its name.

The first number is the highest nozzle temp the model uses the second the lowest. s10 is step of 10° while s5 uses steps of 5°.

Analyse the result

If in doubt make a picture of your print and view it magnified. All pictures published for this model are magnified 6 times. Some filaments like extruder or prusament often show no visible difference over the whole temperature range given on the spool.

This temp tester gives you information about

- stringing
- overhangs
- bridging
- fine structures
- wall surface quality
- wall shine/bright effect
- stiffness / strength
- filament sampler

Attribution

© yahbluez

Donation

If you like to donate you can use ko-fi or paypal, money will be spent for filament and beer.

Filament used

- PLA
- PETG
- PETG HT
- ASA
- ABS
- PC
- CPE
- PVA

- BVOH
- HIPS
- PP
- FLEX
- NGEN
- PA
- NYLON
- COMP
- WOOD
- PVB
- METAL

Model files

	Prusaslicer	38 files
	240-170-s10.3mf	
	230-160-s10.3mf	
	220-150-s10.3mf	
	230-195-s5.3mf	
	260-225-s5.3mf	



210-175-s5.3mf



240-205-s5.3mf



280-210-s10.3mf



190-155-s5.3mf



220-185-s5.3mf



260-190-s10.3mf



280-245-s5.3mf



200-165-s5.3mf



270-200-s10.3mf



270-235-s5.3mf



290-255-s5.3mf



ps-asa-280.3mf



290-220-s10.3mf



ps-bvoh-220.3mf



ps-abs-260.3mf



ps-comp-290.3mf



ps-cpe-280.3mf



ps-ngen-250.3mf



ps-pla-250.3mf



ps-flex-270.3mf



ps-pp-250.3mf



250-215-s5.3mf



ps-metal-270.3mf



ps-pvb-220.3mf



ps-hips-260.3mf



ps-petht-270.3mf



ps-pc-280.3mf



ps-wood-230.3mf



ps-nylon-290.3mf



ps-pva-220.3mf



250-180-s10.3mf



ps-pa-290.3mf



ps-petg-270.3mf



Bambustudio

38 files



220-150-s10.3mf



260-190-s10.3mf



220-185-s5.3mf



270-235-s5.3mf



240-205-s5.3mf



230-160-s10.3mf



260-225-s5.3mf



240-170-s10.3mf



280-245-s5.3mf



280-210-s10.3mf



270-200-s10.3mf



bs-abs-260.3mf



190-155-s5.3mf



250-180-s10.3mf



250-215-s5.3mf



290-255-s5.3mf



bs-bvoh-220.3mf



bs-comp-290.3mf



bs-hips-260.3mf



bs-asa-280.3mf



bs-metal-270.3mf



bs-ngen-250.3mf



bs-nylon-290.3mf



bs-cpe-280.3mf



bs-pc-280.3mf



200-165-s5.3mf



290-220-s10.3mf



bs-petht-270.3mf



bs-pla-250.3mf



bs-petg-270.3mf



bs-pa-290.3mf



210-175-s5.3mf



bs-pp-250.3mf



230-195-s5.3mf



bs-wood-230.3mf



bs-flex-270.3mf



bs-pvb-220.3mf



bs-pva-220.3mf



STEP

38 files



200-165-s5.step



230-160-s10.step




280-210-s10.step




260-190-s10.step



250-180-s10.step



190-155-s5.step



250-215-s5.step



230-195-s5.step



asa-280.step



pc-280.step




240-170-s10.step




pp-250.step




metal-270.step




ngen-250.step




280-245-s5.step




220-150-s10.step



270-200-s10.step



220-185-s5.step



cpe-280.step



260-225-s5.step



petht-270.step



bvoh-220.step




hips-260.step




petg-270.step




nylon-290.step




210-175-s5.step




flex-270.step




pla-250.step



pvb-220.step




abs-260.step



pa-290.step




pva-220.step



240-205-s5.step




290-255-s5.step




290-220-s10.step



270-235-s5.step



comp-290.step



wood-230.step

License ©

This work is licensed under a
GNU



General Public License v3.0

- ✗ | Sharing without ATTRIBUTION
- ✓ | Remix Culture allowed
- ✓ | Commercial Use
- ✓ | Meets Open Definition
- i | Share under the same license

