


A decorative graphic on the left side of the slide consisting of two overlapping parallelograms. The front one is blue and the back one is a light green. They are positioned diagonally, with the blue one partially covering the green one.


Airfoil Testing

By:Rhithvik Selvakumar

Scatter Plot of Foil

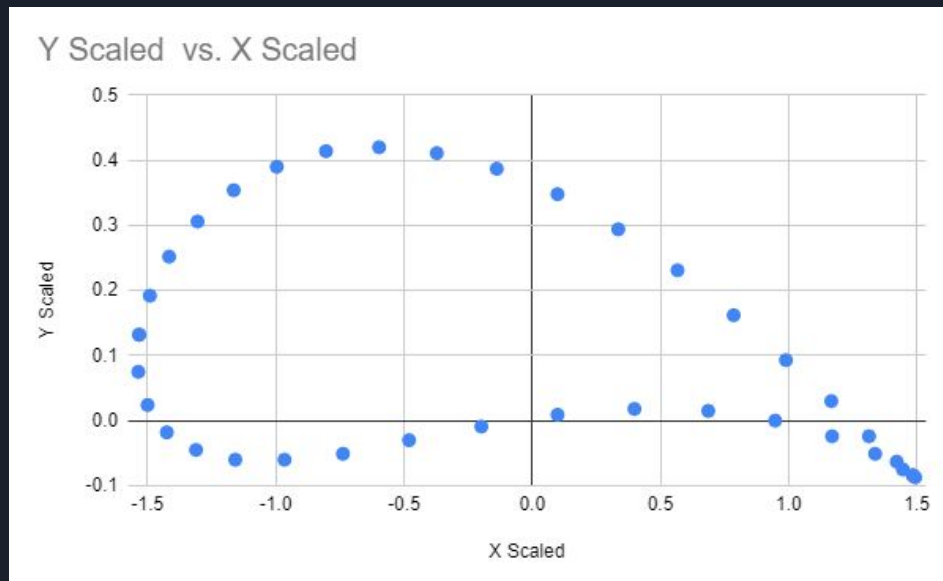

Multiview Drawings

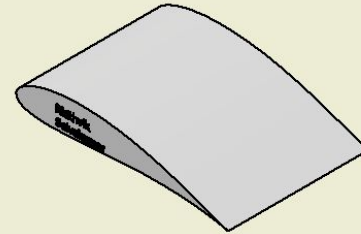

PROJECT:		Round Rock High School ENGINEERING	
APPROVED:	DATE:	PART NAME:	
DRAWN BY:	10/21/2024		
CHECKED BY:			
GRADE:	SIZE A	FILE NAME AND LOCATION:	REV. #
		C:\Users\s148273\Documents\Part1.ipt	

Lift and Drag Graphs




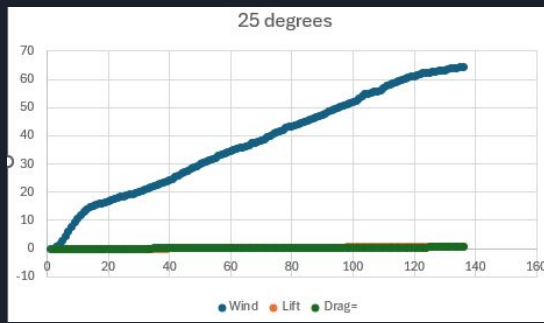


Image of 3D Print Model

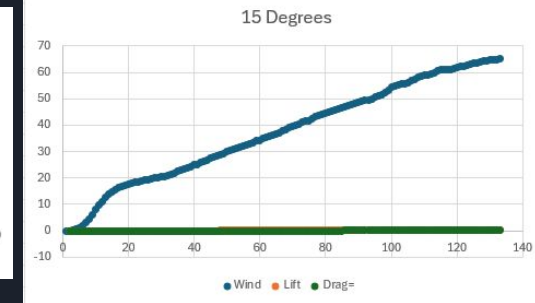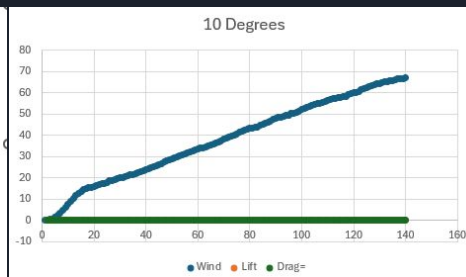

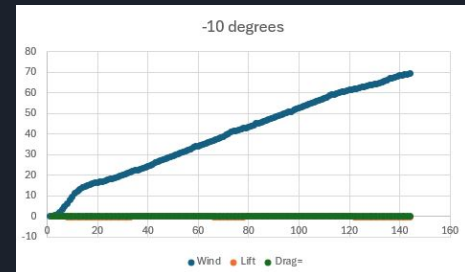

Summary

The basic shape of my airfoil is a low camber airfoil. The best angle of attack for my design was about 20 Degrees, as at this point the ratio of lift and drag was the greatest. If the camber(affects it the most) is increased, the lift increases until the attack angle becomes too high where the drag far exceeds the lift. I think that the simulator would be more accurate as there is far lower chance of error whereas the wind tunnel has many more chances for error like in our case where the sensor was slightly worn. The one thing I might have done differently is tried to fix the sensors in the wind tunnel before running the tunnel.