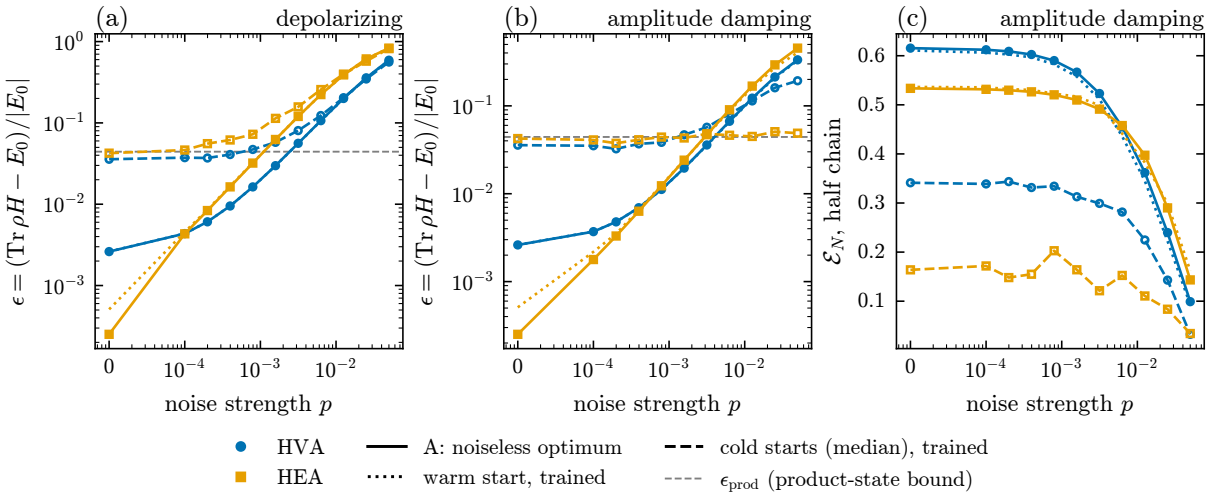
(a)
depolarizing
(b)
amplitude damping
(c)
amplitude damping
$\epsilon = (\mathrm{Tr}\,\rho H - E_0)/|E_0|$
$\mathcal{E}_N$, half chain
noise strength p
HVA
HEA
A: noiseless optimum
warm start, trained
cold starts (median), trained
ϵ_{prod} (product-state bound)