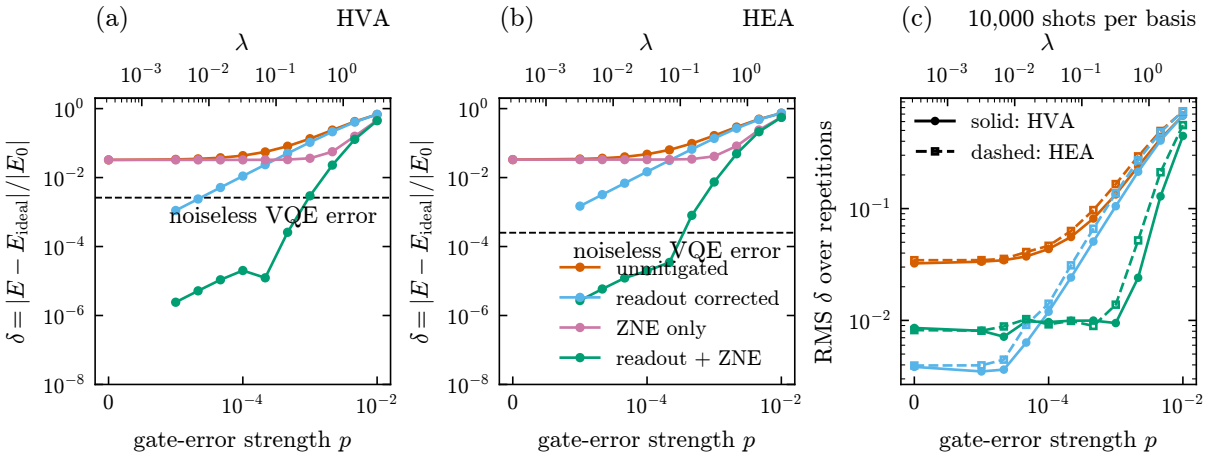
(a)
HVA
λ
10^-3 10^-2 10^-1 10^0
δ = |E − E_ideal|/|E_0|
noiseless VQE error
gate-error strength p
(b)
HEA
noiseless VQE error
unmitigated
readout corrected
ZNE only
readout + ZNE
(c)
10,000 shots per basis
solid: HVA
dashed: HEA
RMS δ over repetitions