JL GRAY
CONSTRUCTION

Vantage Lift Station

Spec/Item:

Lighting

Owner: The Vantage Austin, LLC
5900 Balcones Drive, Suite 100
Austin, TX 78731

Job Address: County Road 140 & County Road 194
Georgetown, TX 78628

Engineer: LJA Engineering
7500 Rialto Blvd Bldg 2, Suite 100
Austin, TX 78735
512-439-4700

Supplier: Sun-Tech Electric
1512 Posey Road
San Marcos, TX 78666

Vantage LS

SUN TECH ELECTRIC

EST. 1984

512-805-6100

SUBMITTAL PACKAGE

Lighting

Approved By:_____

Company:_____

Date:_____

2025-655

VANTAGE LIFT STATION 395 AC WEIR

Quote number LEGACY25-106236-2
Feb 07 2025

SUBMITTAL FOR APPROVAL -AS SPECIFIED

Team

Distributor LONESTAR ELECTRIC SUPPLY

Prepared By

Jennifer Bruning - Legacy Lighting
512-481-9971
jennifer@legacyltg.com
612 Winflo Dr
Austin, TX 78703, USA

VANTAGE LIFT STATION 395 AC WEIR

SUBMITTAL FOR APPROVAL -AS SPECIFIED

Table of Contents

Datasheets

New Section			
Type	Manufacturer	Model Number	Pg.
LB	LUMARK	PRV-C40-740-D-UNV-T4-SA-BZ-PR7-HSS	2
LB	LUMARK	SSA4T15WAM1 317QB404	9
LA	METALUX	4VT2-LD5-4-DR-UNV-L840-CD1-WL-U	12

VANTAGE LIFT STATION 395 AC WEIR

SUBMITTAL FOR APPROVAL -AS SPECIFIED

Notes Summary

VANTAGE LIFT STATION 395 AC WEIR

SUBMITTAL FOR APPROVAL -AS SPECIFIED

Datasheets

New Section

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : LUMARK
Model Number : PRV-C40-740-D-UNV-T4-SA-BZ-PR7-HSS

Type : LB

Project		Catalog #		Type	
Prepared by		Notes		Date	

Lumark

Prevail LED

Area / Site Luminaire

Product Features

LumenSafe Technology · BAA · Light ARchitect™

Interactive Menu

- Ordering Information page 2
- Mounting Details page 3, 4
- Optical Configurations page 5
- Product Specifications page 5
- Energy and Performance Data page 6, 7
- Control Options page 8

Product Certifications

CERTIFIED · CLASS A CAN ICES-005 · RoHS COMPLIANT · ida DARK SKY APPROVED

Quick Facts

- Lumen packages range from 4,800 - 84,000 lumens (35W - 588W)
- Replaces 70W up to 1,000W HID equivalents
- Efficacies up to 160 lumens per watt
- Energy and maintenance savings up to 85% versus HID solutions
- Standard universal quick mount arm with universal drill pattern

Connected Systems

- WaveLinx PRO Wireless
- WaveLinx LITE Wireless

Dimensional Details

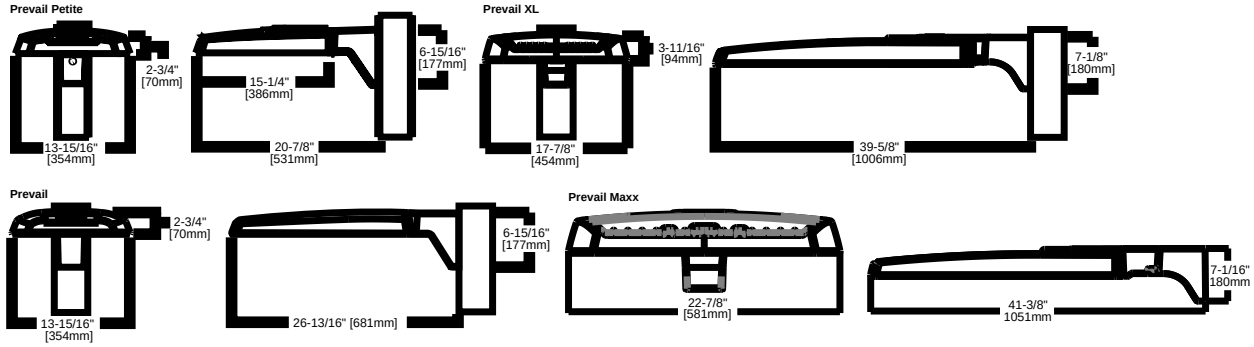

NOTES:
1. Visit https://www.designlights.org/search to confirm qualification. Not all product variations are DLC qualified.
2. IDA Certified for 3000K CCT and warmer only.

COOPER Lighting Solutions

PS500001EN **page 1**
June 3, 2024 7:32 PM

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : **LUMARK**
Model Number : **PRV-C40-740-D-UNV-T4-SA-BZ-PR7-HSS**

Type : **LB**

Lumark — Prevail LED

Ordering Information

SAMPLE NUMBER: **PRV-XL-C75-D-UNV-T4-SA-BZ**

Product Family[1, 2]	Light Engine[4]	Color Temperature	Driver	Voltage	Distribution	Mounting	Color
PRV-P=Prevail Petite **BAA-PRV-P**=Prevail Petite BAA Compliant[3] **TAA-PRV-P**=Prevail Petite TAA Compliant[3]	**C10**=(1 LED) 4,900 Nominal Lumens **C15**=(1 LED) 6,900 Nominal Lumens **C20**=(1 LED) 9,800 Nominal Lumens **C25**=(1 LED) 11,800 Nominal Lumens	**740**=70CRI, 4000K **727**=70CRI, 2700K **730**=70CRI, 3000K **750**=70CRI, 5000K **8540**=85CRI, 4000K	**D**= Dimming (0-10V)	**UNV**= Universal (120-277V) **H**=High Voltage, 347-480V **8**=480V[5] **9**=347V **DV**=DuraVolt (277-480V)[5, 6]	**T2**=Type II **T3**=Type III **T4**=Type IV **T5**=Type V	**SA**=QM Standard Versatile Arm **MA**=QM Mast Arm **FMA**= Fixed Mast Arm[27] **WM**=QM Wall Mount Arm **ADJA-WM**=Adjustable Arm-Wall Mount[29] **ADJA**=Adjustable Arm-Pole Mount[29] **ADJS**=Adjustable Arm-Slipfitter, 3" vertical tenon[29] **SP2**=Adjustable Arm-Slipfitter, 2 3/8" vertical tenon[27, 29]	**BZ**=Bronze **AP**=Grey **BK**=Black **DP**=Dark Platinum **GM**=Graphite Metallic **WH**=White
PRV=Prevail **BAA-PRV**=Prevail BAA Compliant[3] **TAA-PRV**=Prevail TAA Compliant[3]	**C15**=(1 LED) 7,100 Nominal Lumens **C25**=(2 LEDs) 13,100 Nominal Lumens **C40**=(2 LEDs) 17,100 Nominal Lumens **C60**=(2 LEDs) 20,000 Nominal Lumens						
PRV-XL=Prevail XL **BAA-PRV-XL**=Prevail XL BAA Compliant[3] **TAA-PRV-XL**=Prevail XL TAA Compliant[3]	**C75**=(4 LED) 26,100 Nominal Lumens **C100**=(4 LED) 31,000 Nominal Lumens **C125**=(4 LED) 36,000 Nominal Lumens **C150**=(6 LED) 41,100 Nominal Lumens **C175**=(6 LED) 48,600 Nominal Lumens						
PRV-M=Prevail Maxx **BAA-PRV-M**=Prevail Maxx BAA Compliant[3] **TAA-PRV-M**=Prevail MaxxTAA Compliant[3]	**C200**=(9 LED) 48,000 Nominal Lumens **C225**=(9 LED) 56,000 Nominal Lumens **C250**=(9 LED) 65,000 Nominal Lumens **C275**=(9 LED) 73,000 Nominal Lumens						

Options (Add as Suffix)

7030=70 CRI / 3000K CCT[7]
7050=70 CRI / 5000K CCT[7]
CC=Coastal Construction finish[10]
HSS=House Side Shield[8]
L90=Optics Rotated 90° Left
R90=Optics Rotated 90° Right
10K=10kV/10kA UL 1449 Fused Surge Protective Device
20MSP=20kV MOV Surge Protective Device
20K=20kV UL 1449 Fused Surge Protective Device
HA=50°C High Ambient Temperature[9]
PR=NEMA 3-PIN Twistlock Photocontrol Receptacle[11]
PR7=NEMA 7-PIN Twistlock Photocontrol Receptacle[11]
FADC=Field Adjustable Dimming Controller[15]
MS/DIM-L08=Dimming Motion and Daylight Sensor, IR Remote Programmable, < 8· Mounting Height[13, 14]
MS/DIM-L20=Dimming Motion and Daylight Sensor, IR Remote Programmable, 8· - 20· Mounting Height[13, 14]
MS/DIM-L40=Dimming Motion and Daylight Sensor, IR Remote Programmable, 21· - 40· Mounting[13, 14]
SPB1=Dimming Motion and Daylight Sensor, Bluetooth Programmable, < 8· Mounting Height[14, 14]
SPB2=Dimming Motion and Daylight Sensor, Bluetooth Programmable, 8· - 20· Mounting Height[14, 14]
SPB4=Dimming Motion and Daylight Sensor, Bluetooth Programmable, 21· - 40· Mounting Height[14, 14, 27, 28]
WPS2XX=WaveLinx Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7· - 15· Mounting[14, 14, 16, 17]
WPS4XX=WaveLinx Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15· - 40· Mounting[12, 15, 16, 17]
WLS2XX=WaveLinx Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 7· - 15· Mounting[12, 15, 16, 17]
WLS4XX=WaveLinx Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15· - 40· Mounting[12, 15, 16, 17]
(See Table Below)=LumenSafe Integrated Network Security Camera[18, 19]

Accessories (Order Separately)[20, 21]

PRVSA-XX=Standard Arm Mounting Kit[22]
PRVMA-XX=Mast Arm Mounting Kit[22]
PRVWM-XX=Wall Mount Kit[22]
PRV-ADJA-XX=Adjustable Arm - Pole Mount Kit[22]
PRV-ADJS-XX=Adjustable Arm - Slipfitter Kit[22]
PRV-ADJA-WM-XX=Adjustable Arm - Wall Mount Kit[22]
PRVXLSA-XX=Standard Arm Mounting Kit[23]
PRVXLMA-XX=Mast Arm Mounting Kit[23]
PRVXLWM-XX=Wall Mount Kit[23]
PRV-XL-ADJA-XX=Adjustable Arm - Pole Mount Kit[28]
PRV-XL-ADJS-XX=Adjustable Arm - Slipfitter Kit[28]
PRV-XL-ADJA-WM-XX=Adjustable Arm - Wall Mount Kit[28]
PRV-M-ADJA-XX=Adjustable Arm - Pole Mount Kit[27]
PRV-M-ADJS-XX=Adjustable Arm - Slipfitter Kit[27]
PRV-M-ADJA-WM-XX=Adjustable Arm - Wall Mount Kit[27]
MA1010-XX=Single Tenon Adapter for 3-1/2" O.D. Tenon
MA1011-XX=2@180° Tenon Adapter for 3-1/2" O.D. Tenon
MA1017-XX=Single Tenon Adapter for 2-3/8" O.D. Tenon
MA1018-XX=2@180° Tenon Adapter for 2-3/8" O.D. Tenon
SRA238=Tenon Adapter from 3" to 2-3/8"
PRV/COB-FDV=Full Drop Visor[23]
PRVXL/COB-FDV=Full Drop Visor[23]
HS/VERD=House Side Shield Kit[24]
VGS-F/B=Vertical Glare Shield Kit, Front/Back[24]
VGS-SIDE=Vertical Glare Shield Kit, Side[24]
OA/RA1013=Photocontrol Shorting Cap
OA/RA1014=NEMA Photocontrol - 120V
OA/RA1016=NEMA Photocontrol - Multi-Tap 105-285V
OA/RA1201=NEMA Photocontrol - 347V
OA/RA1027=NEMA Photocontrol - 480V
FSIR-100=Wireless Configuration Tool for Occupancy Sensor[25]
WOLC-7P-10A=WaveLinx Outdoor Control Module (7-PIN)[26]

NOTES:
1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.
2. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for alll applications. Refer to installation instructions IB500002EN and pole white paper WP513001EN for additional support information.
3. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCE website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
4. Standard 4000K CCT and 70CRI.
5. 480V not to be used with ungrounded or impedance grounded systems.
6. DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit www.signify.com/duravolt for more information.
7. Use dedicated IES files on product website for non-standard CCTs.
8. House Side Shield not suitable with T5 distribution. Not available with PRV-C60 lumen package.
9. Not available with PRV-C60 lumen package. Not available with PRV-P-C25 lumen package.
10. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654.
11. If DuraVolt (DV) is specified, use a photocontrol that matches the input voltage used.
12. Controls system is not available in combination with a photocontrol receptacle (PR & PER7) or another controls system (MS or SPB). Option not available with DuraVolt (DV) voltage option.
13. Utilizes the Wattstopper sensor FSP-211. Sensor color white unless specified otherwise via PDR. To field-configure, order FSIR-100 accessory separately.
14. Utilizes the Wattstopper sensor FSP-3XX series. Sensor color determined by product finish. See Sensor Color Reference Table. Field-configures via mobile application. See Controls section for details.
15. Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F).
16. For the device to be field-configurable, requires WAC Gateway components WAC-PoE and WPOE-120 in appropriate quantities. Only compatible with WaveLinx system and software and requires system components to be installed for operation. See website for more Wavelinx application information.
17. Replace XX with sensor color (WH, BZ, or BK).
18. Only available in PRV-XL configurations C75, C100, C125, C150, or C175.
19. Not available with 347V, 480V, DV, or HA options. Consult LumenSafe system product pages for additional details and compatability information.
20. Replace XX with paint color.
21. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
22. Not for use with PRV-XL or PRV-M configurations.
23. Only for use with PRV. Not applicable to PRV-M, PRV-XL, or PRV-P.
24. Must order one per optic/LED when ordering as a field-installable accessory (1, 2, 4, 6 or 9).
25. This tool enables adjustment to Motion Sensor (MS) parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative for more information.
26. Requires 7-PIN NEMA twistlock photocontrol receptacle (PR & PER7) option. The WOLC-7 cannot be used in conjunction with other controls systems (MS or LWR). Operates on 120-347V input voltages.
27. Only for use with PRV-M configurations.
28. Only for use with PRV-XL configurations.
29. Fixed for PRV-M.
30. Cannot be used with PR7 or other motion response control options

LumenSafe Integrated Network Security Camera Technology Options (Add as Suffix)

Product Family	Camera Type	Data Backhaul		
L=LumenSafe Technology	**H**=Dome Camera, High Res **Z**=Dome Camera, Remote PTZ	**C**=Cellular, Customer Installed SIM Card **A**=Cellular, Factory Installed AT&T SIM Card	**V**=Cellular, Factory Installed Verizon SIM Card **S**=Cellular, Factory Installed Sprint SIM Card	**E**=Ethernet Networking

Stock Ordering Information

Product Family[1]	Light Engine	Voltage	Distribution
PRVS=Prevail	**C15**=(1 LED) 7,100 Nominal Lumens **C25**=(2 LEDs) 13,100 Nominal Lumens **C40**=(2 LEDs) 17,100 Nominal Lumens **C60**=(2 LEDs) 20,000 Nominal Lumens	**UNV**= Universal (120-277V) **347**=347V[2]	**T3**=Type III **T4**=Type IV
PRVS-XL=Prevail XL	**C75**=(4 LED) 26,100 Nominal Lumens **C100**=(4 LED) 31,000 Nominal Lumens **C125**=(4 LED) 36,000 Nominal Lumens **C150**=(6 LED) 41,100 Nominal Lumens **C175**=(6 LED) 48,600 Nominal Lumens		

NOTES:
1. All stock configurations are standard 4000K/70CRI, bronze finish, and include the standard versatile mounting arm.
2. Only available in PRVS configurations C15, C25, C40 or C60.

Lumark — Prevail LED

Mounting Details

SA=QM Pole Mount Arm (PRV & PRV-P)

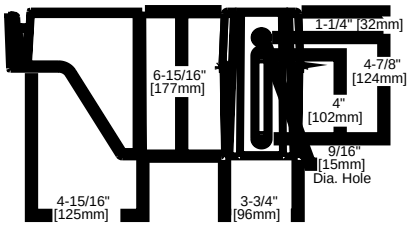

SA=QM Pole Mount Arm (PRV-XL)

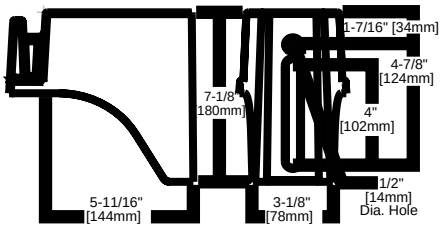

WM=QM Wall Mount Arm (PRV & PRV-P)

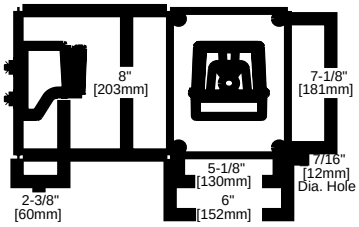

WM=QM Wall Mount Arm (PRV-XL)

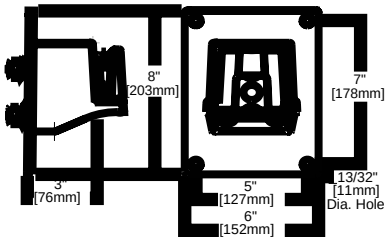

MA=QM Mast Arm (PRV & PRV-P)

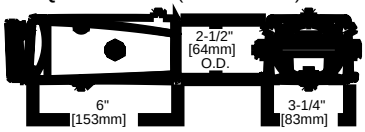

MA=QM Mast Arm (PRV-XL)

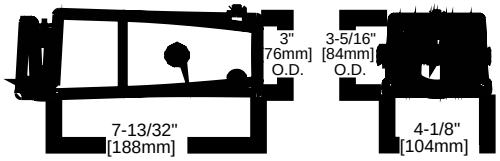

ADJA=Adjustable Arm Pole Mount (PRV & PRV-P)

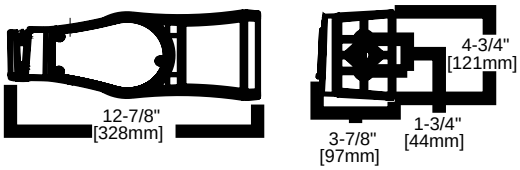

ADJA=Adjustable Arm Pole Mount (PRV-XL)

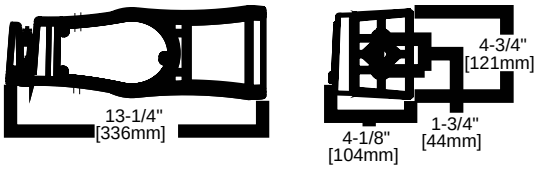

ADJW=Adjustable Arm Wall Mount (PRV & PRV-P)

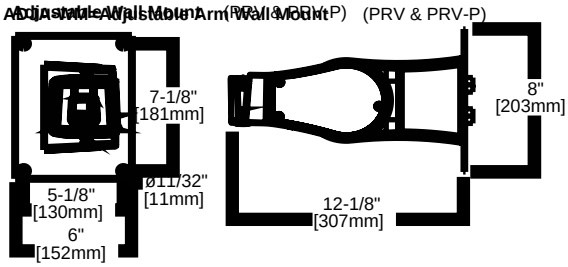

ADJW=Adjustable Arm Wall Mount (PRV-XL)

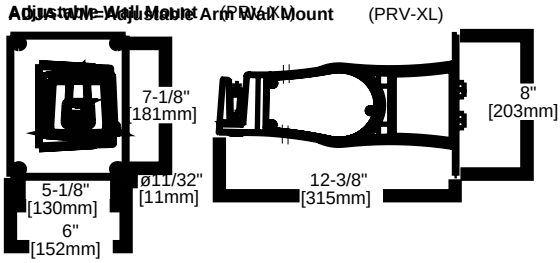

ADJS=Adjustable Slipfitter 3 (PRV & PRV-P)

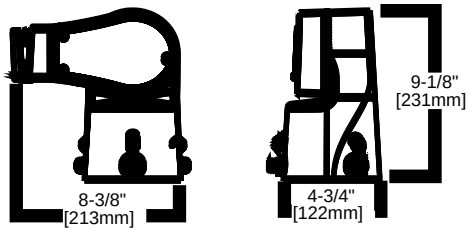

ADJS=Adjustable Slipfitter 3 (PRV-XL)

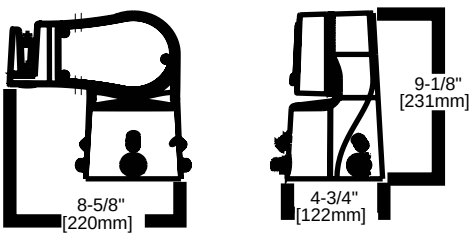

Lumark — Prevail LED

Mounting Details

SA=QM Pole Mount Arm (PRV-M)

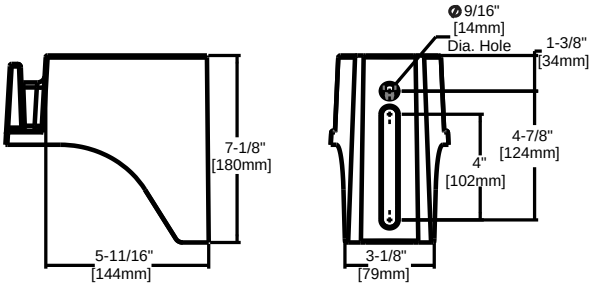

Versatile Mount System



WM=QM Wall Mount Arm (PRV-M)

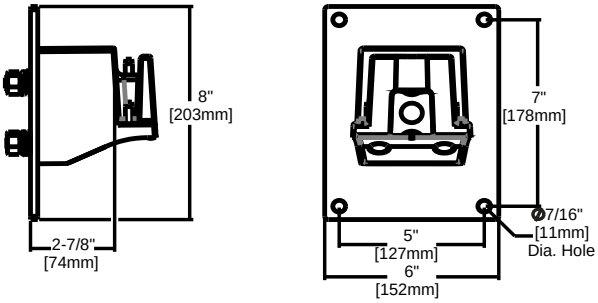

ADJS=Adjustable Slipfitter (PRV-M)

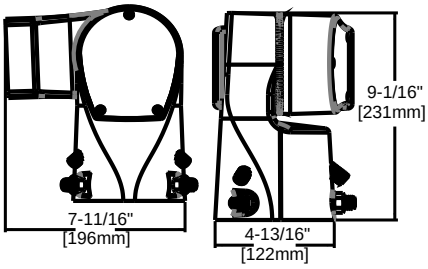

MA=QM Mast Arm (PRV-M)

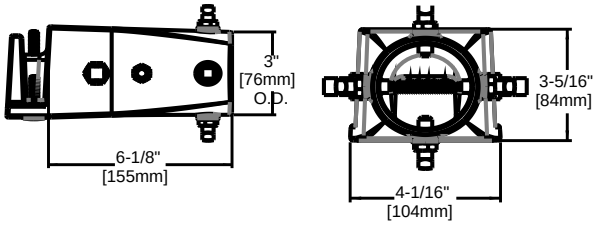

SP2=Adjustable Slipfitter 2-3/8· (PRV-M)

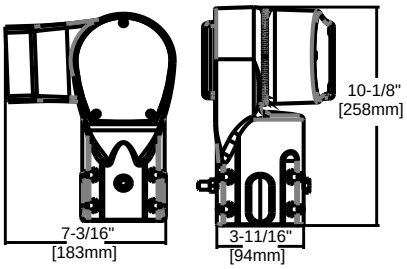

FMA=Fixed Mast Arm (PRV-M)

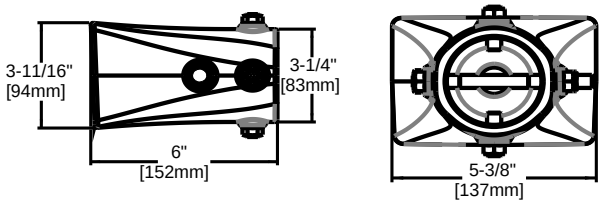

DM=Direct Pole Mount Arm (PRV-M)

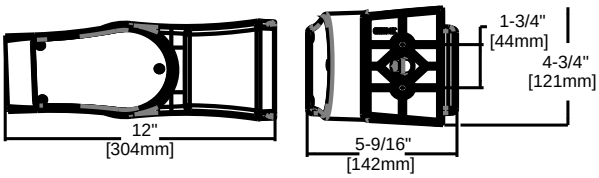

Lumark — Prevail LED

Mounting Details

Mounting Configurations and EPAs

NOTE: For 2 PRV-s mounted at 90°, requires minimum 3- square or 4- round pole for fixture clearance. For 2 PRV-XL-s mounted at 90 °, requires minimum 4- square or round pole for fixture clearance. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications.

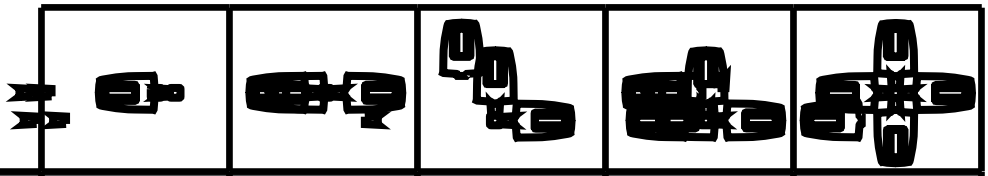

Housing Size	Tilt Angle (Degrees)	Arm Mount Single	Arm Mount 2 @ 180°	Arm Mount 2 @ 90°	Arm Mount 3 @ 90°	Arm Mount 4 @ 90°
Prevail Petite	0°	0.54	1.08	0.84	1.38	1.38
	60°	1.68	1.85	2.42	3.15	3.30
Prevail	0°	0.92	1.35	1.42	1.63	1.63
	60°	2.20	2.40	3.05	3.88	4.07
	60° + Full Drop Visor	2.20	2.40	3.25	4.28	4.47
Prevail XL	0°	1.12	2.25	2.13	2.52	2.52
	60°	3.99	4.30	5.26	6.51	6.79
	60° + Full Drop Visor	3.99	4.30	5.59	7.17	7.49
Prevail Maxx	0°	1.28	2.56	1.7	2.69	2.69
	60°	5.09	5.52	6.34	7.49	7.81

Optical Configurations

PRV-P-C10/C15/C20/C25 (4,900/6,900/9,800/11,800 Nominal Lumens)

PRV-C15 (7,100 Nominal Lumens)

PRV-C25/C40/C60 (13,100/17,100/20,000 Nominal Lumens)

PRV-XL-C75/C100/C125 (26,100/31,000/36,300 Nominal Lumens)

PRV-XL-C150/C175 (41,100/48,600 Nominal Lumens)

PRV-M-PA6X (50,000/60,000/70,000/80,000 Nominal Lumens)



Optical Distributions

T2 (Type II)



T3 (Type III)



T4 (Type IV)



T5 (Type V)



= Distribution with House Side Shield (HSS)

= Optical Distribution

Product Specifications

Construction
- Single-piece die-cast aluminum housing
- Tethered die-cast aluminum door

Optics
- Dark Sky Approved (3000K CCT and warmer only)
- Precision molded polycarbonate optics

Electrical
- -40°C minimum operating temperature
- 40°C maximum operating temperature
- >.9 power factor
- <20% total harmonic distortion
- Class 1 electronic drivers have expected life of 100,000 hours with <1% failure rate
- 0-10V dimming driver is standard with leads external to the fixture
- Standard MOV surge protective device designed to withstand 10kV of transient line surge
- Luminaire available with the field adjustable dimming controller (FADC) to manually adjust wattage and reduce the total lumen output and light levels. Comes pre-set to the highest position at the lumen output selected.

Mounting
- Versatile, patented, standard mount arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8" (Type M drilling recommended for new installations)
- A knock-out on the standard mounting arm enables round pole mounting
- Adjustable pole and wall mount arms adjust in 5° increments from 0° to 60°; Downward facing orientation only (Type N drilling required for ADJA mount)
- Adjustable slipfitter arm adjusts in 5° increments from -5° to 85°; Downward facing orientation only
- Adjustable Arms: 1.5G vibration rated
- Prevail and Prevail Petite: 3G vibration rated
- Prevail XL Mast Arm: 3G vibration rated
- Prevail XL Standard Arm: 1.5G vibration rated

Typical Applications
- Parking lots, Walkways, Roadways and Building Areas

Finish
- Five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Finish is compliant to 3,000 hour salt spray standard (per ASTM B117)

Shipping Data
- Prevail Petite: 18 lbs. (7.94 kgs.)
- Prevail: 20 lbs. (9.09 kgs.)
- Prevail XL: 45 lbs. (20.41 kgs.)
- Prevail Maxx: 49 lbs. (22.23 kgs.)

Warranty
- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : **LUMARK**
Model Number : **PRV-C40-740-D-UNV-T4-SA-BZ-PR7-HSS**

Type : **LB**

Lumark — Prevail LED

Energy and Performance Data

View PRV-P IES files | View PRV IES files | View PRV-XL IES files

Power and Lumens

Product Family		Prevail Petite				Prevail				Prevail XL					Prevail Maxx			
Light Engine		C10	C15	C20	C25	C15	C25	C40	C60	C75	C100	C125	C150	C175	C200	C225	C250	C275
Power (Watts)		35	49	73	94	52	96	131	153	176	217	264	285	346	346	418	487	588
nput Current @ 120V (A)		0.29	0.41	0.61	0.79	0.43	0.80	1.09	1.32	1.50	1.84	2.21	2.38	2.92	2.89	3.49	4.06	4.90
nput Current @ 277V (A)		0.13	0.18	0.27	0.35	0.19	0.35	0.48	0.57	0.66	0.82	0.97	1.04	1.25	1.26	1.51	1.72	2.06
nput Current @ 347V (A)		0.11	0.16	0.23	0.29	0.17	0.30	0.41	0.48	0.54	0.66	0.79	0.84	1.02	1.00	1.21	1.40	1.70
nput Current @ 480V (A)		0.08	0.12	0.17	0.22	0.12	0.22	0.30	0.35	0.40	0.48	0.57	0.62	0.74	0.73	0.88	1.00	1.21
Distribution[1]																		
Type II	4000K Lumens	4,775	6,717	9,542	11,521	7,123	13,205	17,172	20,083	26,263	31,231	36,503	41,349	48,876	50,349	59,444	68,447	79,322
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	138	137	131	122	137	138	131	131	149	144	138	145	141	146	142	141	135
	3000K Lumens [1]	4,869	6,595	9,369	11,312	6,994	12,965	16,860	19,718	25,786	30,664	35,840	40,598	47,989	49,437	58,368	67,208	77,886
Type III	4000K Lumens	4,782	6,727	9,556	11,538	7,111	13,183	17,144	20,050	26,120	31,061	36,304	41,124	48,610	50,162	59,223	68,193	79,027
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	138	137	131	123	137	137	131	131	148	143	138	144	140	145	142	140	135
	3000K Lumens [1]	4,695	6,605	9,383	11,329	6,982	12,944	16,832	19,686	25,646	30,497	35,645	40,377	47,727	49,254	58,151	66,958	77,596
Type IV	4000K Lumens	4,880	6,865	9,752	11,774	7,088	13,140	17,087	19,984	26,098	31,035	36,274	41,089	48,569	50,575	59,711	68,754	79,678
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B1-U0-G3	B2-U0-G4	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	141	140	134	125	136	137	130	131	148	143	137	144	140	146	143	141	136
	3000K Lumens [1]	4,792	6,740	9,575	11,561	6,959	12,901	16,777	19,621	25,624	30,471	35,615	40,343	47,687	49,659	58,630	67,510	78,235
Type V	4000K Lumens	5,067	7,128	10,126	12,226	7,576	14,045	18,264	21,360	28,129	33,450	39,097	44,287	52,349	53,531	63,201	72,773	84,335
	BUG Rating	B3-U0-G2	B3-U0-G2	B4-U0-G3	B4-U0-G3	B3-U0-G3	B4-U0-G3	B4-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	146	145	139	130	146	146	139	140	160	154	148	155	151	155	151	150	144
	3000K Lumens [1]	4,975	6,999	9,942	12,004	7,438	13,790	17,932	20,972	27,618	32,843	38,387	43,483	51,398	52,562	62,057	71,455	82,808

NOTES:
1. For 3000K, 5000K or HSS data, refer to published IES files.

Lumen Maintenance

Configuration	TM-21 Lumen Maintenance (50,000 Hours)	Theoretical L70 (Hours)
Prevail and Prevail Petite at 25°C	91.30%	> 194,000
Prevail and Prevail Petite at 40°C	87.59%	> 134,000
Prevail XL at 25°C	91.40%	> 204,000
Prevail XL at 40°C	89.41%	> 158,000
Prevail Maxx at 25°C	91.40%	> 204,000
Prevail Maxx at 40°C	89.41%	> 158,000

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
10ºC	**1.02**
15ºC	**1.01**
25ºC	**1.00**
40ºC	**0.99**

Sensor Color Reference Table(SPBx)

Housing Finish	Sensor Color
AP=Grey	Grey
BZ=Bronze	Bronze
BK=Black	Black
DP=Dark Platinum	Grey
GM=Graphite Metallic	Black
WH=White	White

FADC Settings

FADC Position	Lumen Multiplier
1	25%
2	46%
3	55%
4	62%
5	72%
6	77%
7	82%
8	85%
9	90%
10	100%

Note:+/-5% typical value

COOPER Lighting Solutions

Lumark — Prevail LED

Control Options

0-10V This fixture provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (PR and PR7) Photocontrol receptacles provide a flexible solution to enable ·dusk-to-dawn· lighting by sensing light levels. Advanced control systems compatible with NEMA 7-PIN standards can be utilized with the PR7 receptacles.

Dimming Occupancy Sensor (SPB, MS/DIM-LXX) These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the luminaire will dim down after five minutes of no activity detected. When activity is detected, the luminaire returns to full light output. These occupancy sensors include an integral photocell for ·dusk-to-dawn· control or ·daylight harvesting.· Factory default is enabled for the MS sensors and disabled for the SPB. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes.

For mounting heights up to 8' (SPB1, -L08)

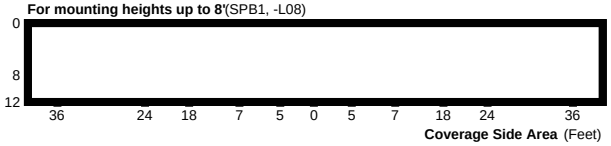

For mounting heights up to 20' (SPB2, -L20)

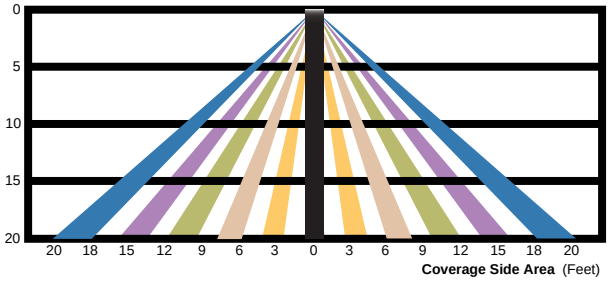

For mounting heights up to 40' (SPB4, -L40W)

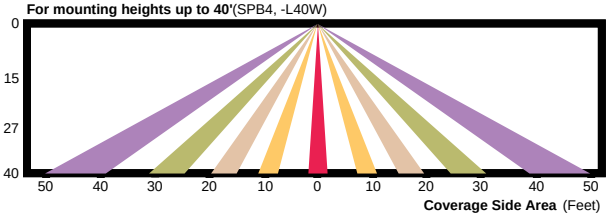

WaveLinx Wireless Control and Monitoring System Available in 7-PIN or 4-PIN configurations, the WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets).

WaveLinx Outdoor Control Module (WOLC-7P-10A)· A photocontrol that enables astronomic or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn.

WaveLinx Wireless Sensor (WPS2 and WPS4) These outdoor sensors offer passive infrared (PIR) occupancy sensing and a photocell for closed-loop daylight sensing. These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected, and the photocell for ·dusk-to-dawn· control is default enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-40'.

For mounting heights from 16' to 40' (WPS)

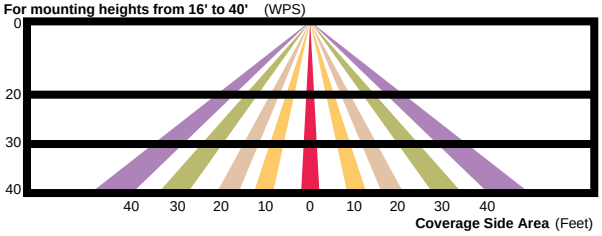

LumenSafe (LD) The LumenSafe integrated network camera is a streamlined, outdoor-ready camera that provides high definition video surveillance. This IP camera solution is optimally designed to integrate into virtually any video management system or security software platform of choice. No additional wiring is needed beyond providing line power to the luminaire. LumenSafe features factory-installed power and networking gear in a variety of networking options allowing security integrators to design the optimal solution for active surveillance.

© 2024 Cooper Lighting Solutions
All Rights Reserved.

Specifications and dimensions subject to change without notice.

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : **LUMARK**
Model Number : **SSA4T15WAM1 317QB404**

Type : **LB**

Aluminum Poles

Catalog #		**Type**	
Project			
Comments		**Date**	
Prepared by			

SSA SQUARE STRAIGHT ALUMINUM

FEATURES
- Straight square shaft 6005-T6 aluminum alloy polished
- 356-T6 cast aluminum alloy base with aluminum knock-in bolt covers
- 8'-35' mounting heights
- Drilled or tenon (specify)

DESIGN CONSIDERATIONS - VIBRATIONS AND NON-GROUND MOUNTED INSTALLATIONS

The information contained herein is for general guidance only and is not a replacement for professional judgment. Design considerations for wind-induced vibrations and non-ground mounted installations (e.g., installations on bridges or buildings) are not included in this document. Consult with a professional, and local and federal standards, before ordering to ensure product is appropriate for the intended purpose and installation location. Refer to the Cooper Lighting Solutions Light Pole White Paper for risk factors and design considerations, Learn more.

NOTE: The Limited Warranty for this product specifically excludes fatigue failure or similar damage resulting from vibration, harmonic oscillation or resonance.

Specifications and dimensions subject to change without notice. Consult your lighting representative at Cooper Lighting Solutinos or visit www.cooperlighting.com for available options, accessories and ordering information.

ORDERING INFORMATION

SAMPLE NUMBER: SSA4T08WXM1G

Product Family	Shaft Size (Inches) [1]	Wall Thickness (Inches)	Mounting Height (Feet)	Base Type	Finish	Mounting Type	Number and Location of Arms	Options (Add as Suffix)
SSA= Square Straight Aluminum	4= 4" 5= 5" 6= 6" 9= 9" Steel; 6-3/4" Aluminum	T= 0.125" M= 0.188" X= 0.250"	08= 8' 10= 10' 12= 12' 15= 15' 18= 18' 20= 20' 25= 25' 30= 30' 35= 35'	W= Aluminum	A= Satin Brushed Aluminum B= Clear Anodized C= Dark Bronze Anodized D= Black Anodized E= Medium Bronze Anodized F= Dark Bronze J= Summit White K= Carbon Bronze L= Dark Platinum R= Hartford Green S= Silver T= Graphite Metallic V= Grey W= White X= Custom Color BK= Black Smooth BT= Black Textured	2= 2-3/8" O.D. Tenon (4" Long) 3= 3-1/2" O.D. Tenon (5" Long) 4= 4" O.D. Tenon (6" Long) 9= 3" O.D. Tenon (4" Long) 6= 2-3/8" O.D. Tenon (6" Long) 7= 4" O.D. Tenon (10" Long) A= Type A Drilling C= Type C Drilling E= Type E Drilling F= Type F Drilling G= Type G Drilling J= Type J Drilling K= Type K Drilling M= Type M Drilling N= Type N Drilling R= Type R Drilling	1= Single 2= 2 at 180° 3= Triple[2] 4= 4 at 90° 5= 2 at 90° X= None	A= 1/2" Tapped Hub [3] B= 3/4" Tapped Hub [3] C= Convenience Outlet [4] E= GFCI Convenience Outlet [4] F= Vibration Pad G= Ground Lug H= Additional Hand Hole [5] V= Vibration Dampener

NOTES: 1. All shaft sizes nominal. 2. Square poles are 3 at 90°, round poles are 3 at 120°. **3.** Tapped Hub is located 5' below the pole top and on the same side of pole as hand hole, unless specified otherwise. 4. Outlet is located 4' above base and on same side of pole as hand hole, unless specified otherwise. Receptacle not included, provision only. 5. Additional hand hole is located 12" below pole top and 90° from standard hand hole location, unless otherwise specified.

ANCHORAGE DATA

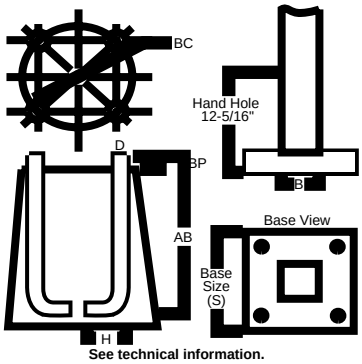

See technical information.

Pole	Anchor Bolt and Template Package	Template Only	Bolt Circle (inches)	Number of Bolts	Anchor Bolt Size (inches)
SSA4TxxW	317QB404	229354D	9	4	3/4 x 17 x 3
SSA4MxxW	317QB404	229354D	9	4	3/4 x 17 x 3
SSA5TxxW	317QB405	229357D	11	4	3/4 x 17 x 3
SSA5MxxW	317QB405	229357D	11	4	3/4 x 17 x 3
SSA6MxxW	436QB406	229243D	12-1/2	4	1 x 36 x 4
SSA6XxxW	436QB406	229243D	12-1/2	4	1 x 36 x 4
SSA9XxxW	436QB468	228520D	14-1/4	4	1 x 36 x 4

COOPER Lighting Solutions

TD513009EN
April 14, 2021 9:31 AM

Effective Projected Area (At Pole Top)

Mounting Height (Feet)	Catalog Number [1, 2]	Wall Thickness (Inches)	Base Square [3] (Inches)	Bolt Circle Diameter (Inches)	Anchor Bolt Projection [3] (Inches)	Shaft Size [3] (Inches)	Anchor Bolt Diameter x Length x Hook (Inches)	Net Weight (Pounds)	Maximum Effective Projected Area (Square Feet) [4]				Max. Fixture Load - Includes Bracket (Pounds)
MH			S	BC	BP	B	D x AB x H		70 mph	80 mph	90 mph	100 mph	
8	SSA4T08W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	23	26.6	19.9	15.2	11.9	350
12	SSA4T12W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	32	16.0	11.5	8.5	6.3	260
15	SSA4T15W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	39	9.1	6.2	4.2	2.8	200
15	SSA4M15W	0.188	10	9	3-1/8	4	3/4 x 17 x 3	55	14.8	10.6	7.7	5.6	200
15	SSA5T15W	0.125	11-9/16	11	3-1/4	5	3/4 x 17 x 3	52	16.0	11.3	8.1	5.8	260
18	SSA4T18W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	46	6.4	4.0	2.3	1.1	100
18	SSA4M18W	0.188	10	9	3-1/8	4	3/4 x 17 x 3	66	11.0	7.4	5.0	3.3	150
18	SSA5T18W	0.125	11-9/16	11	3-1/4	5	3/4 x 17 x 3	61	11.8	7.8	5.1	3.2	150
18	SSA5M18W	0.188	11-9/16	11	3-1/4	5	3/4 x 17 x 3	85	19.2	13.5	9.6	6.8	260
20	SSA4M20W	0.188	10	9	3-1/8	4	3/4 x 17 x 3	72	8.8	5.6	3.5	1.9	150
20	SSA5T20W	0.125	11-9/16	11	3-1/4	5	3/4 x 17 x 3	66	9.5	5.9	3.5	1.7	100
20	SSA5M20W	0.188	11-9/16	11-1/8	3-1/4	5	3/4 x 17 x 3	94	16.4	11.2	7.6	5.0	150
25	SSA5M25W	0.188	11-1/2	11	3-1/4	5	3/4 x 17 x 3	115	10.2	6.0	3.2	1.1	100
25	SSA6M25W	0.188	12-3/4	12-1/2	4	6	1 x 36 x 4	140	16.6	10.6	6.5	3.5	260
30	SSA6X30W	0.250	12-3/4	12-1/2	4	6	1 x 36 x 4	215	14.8	9.0	5.0	2.1	260
30	SSA9X30W[5]	0.250	15-1/8	14-5/8	4-1/8	6-3/4	1 x 36 x 4	237	21.1	13.5	8.2	4.5	260
35	SSA9X35W[5]	0.250	15-1/8	14-5/8	4-1/8	6-3/4	1 x 36 x 4	274	14.1	7.6	3.1	--	150

Effective Projected Area (18" Above Pole Top)

Mounting Height (Feet)	Catalog Number [1, 2]	Wall Thickness (Inches)	Base Square [3] (Inches)	Bolt Circle Diameter (Inches)	Anchor Bolt Projection [3] (Inches)	Shaft Size [3] (Inches)	Anchor Bolt Diameter x Length x Hook (Inches)	Net Weight (Pounds)	Maximum Effective Projected Area (Square Feet) [4]				Max. Fixture Load - Includes Bracket (Pounds)
MH			S	BC	BP	B	D x AB x H		70 mph	80 mph	90 mph	100 mph	
8	SSA4T08W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	23	22.2	16.6	12.7	10	350
12	SSA4T12W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	32	14.1	10.1	7.4	5.5	260
15	SSA4T15W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	39	8.2	5.6	3.8	2.5	200
15	SSA4M15W	0.188	10	9	3-1/8	4	3/4 x 17 x 3	55	13.4	9.6	6.9	5.1	200
15	SSA5T15W	0.125	11-9/16	11	3-1/4	5	3/4 x 17 x 3	52	14.4	10.2	7.3	5.2	260
18	SSA4T18W	0.125	10	9	3-1/8	4	3/4 x 17 x 3	46	5.9	3.6	2.1	0.9	100
18	SSA4M18W	0.188	10	9	3-1/8	4	3/4 x 17 x 3	66	10.0	6.8	4.6	3.0	150
18	SSA5T18W	0.125	11-9/16	11	3-1/4	5	3/4 x 17 x 3	61	10.8	7.2	4.7	2.9	150
18	SSA5M18W	0.188	11-9/16	11	3-1/4	5	3/4 x 17 x 3	85	17.6	12.4	8.8	6.2	260
20	SSA4M20W	0.188	10	9	3-1/8	4	3/4 x 17 x 3	72	8.1	5.2	3.2	1.7	150
20	SSA5T20W	0.125	11-9/16	11	3-1/4	5	3/4 x 17 x 3	66	8.8	5.5	3.2	1.5	100
20	SSA5M20W	0.188	11-9/16	11-1/8	3-1/4	5	3/4 x 17 x 3	94	15.2	10.3	7.0	4.7	150
25	SSA5M25W	0.188	11-1/2	11	3-1/4	5	3/4 x 17 x 3	115	9.5	5.6	3.0	1.0	100
25	SSA6M25W	0.188	12-3/4	12-1/2	4	6	1 x 36 x 4	140	15.6	9.9	6.1	3.3	260
30	SSA6X30W	0.250	12-3/4	12-1/2	4	6	1 x 36 x 4	215	14.0	8.5	4.7	2.0	260
30	SSA9X30W[5]	0.250	15-1/8	14-5/8	4-1/8	6-3/4	1 x 36 x 4	237	20.0	12.8	7.8	4.3	260
35	SSA9X35W[5]	0.250	15-1/8	14-5/8	4-1/8	6-3/4	1 x 36 x 4	274	13.5	7.2	2.9	--	150

NOTES:
1. Catalog number includes pole with hardware kit. Anchor bolts not included. Before installing, make sure proper anchor bolts and templates are obtained.
2. Tenon size or machining for rectangular arms must be specified. Hand hole position relative to drill location.
3. Shaft size, base square, anchor bolts and projections may vary slightly. All dimensions nominal.
4. EPAs based on shaft properties with wind normal to flat. EPAs calculated using base wind velocity as indicated plus 30% gust factor.
5. Factory installed vibration damper.

VIBRATION

Vibrations may cause damage to structures, including poles. Vibrations are unpredictable, and there are many factors and variables that can cause damaging vibrations. Many wind conditions exist that can create damaging vibrations to poles and luminaires, such as constant winds between 10-30 mph. Although all pole types can experience vibration, straight square poles seem to be most prone. Vibration dampers and/or a round tapered design may be used to mitigate damage from vibrations, but there is no guarantee damaging vibrations will be prevented. Vibration dampers are not included with this pole but can be ordered separately. Consult with a professional, and local and federal standards, to ensure this pole is appropriate for the intended purpose and installation location. Refer to Cooper Lighting Solutions' Light Pole White Paper for risk factors and design considerations.

MAINTENANCE

Perform inspections periodically. A prudent inspection schedule would be: one week after installation, one month after installation, yearly after installation, and following any major wind event. During the inspection, check the poles for cracks. If cracks are detected, remedial action is required. Recheck anchor bolt torques and re-tighten according to the recommended torque values. Check for missing covers and pole caps and replace as necessary. Check the pole for corrosion and deterioration of the finish. Should there be corrosion or deterioration, take remedial action to correct.

WARNING: Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to pole white paper WP513001EN for additional support information. Before installing, make sure proper anchor bolts and templates are obtained. The use of unauthorized accessories such as banners, signs, cameras or pennants for which the pole was not designed voids the pole warranty and may result in pole failure causing serious injury or property damage. Information regarding total loading capacity can be supplied upon request. The pole warranty is void unless poles are used and installed as a complete pole and luminaire combination. This warranty specifically excludes failure as the result of a third party act or omission, misuse, unanticipated uses, fatigue failure or similar phenomena resulting from induced vibration, harmonic oscillation or resonance associated with movement of air currents around the product.

Specifications and dimensions subject to change without notice. Consult your lighting representative at Cooper Lighting Solutions or visit www.cooperlighting.com for available options, accessories and ordering information.

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Specifications and dimensions subject to change without notice.

TD513009EN
April 14, 2021 9:31 AM

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : METALUX
Model Number : 4VT2-LD5-4-DR-UNV-L840-CD1-WL-U

Type : LA

Project		Catalog #		Type	
Prepared by		Notes		Date	

Vaportite LED

4' Industrial LED Lamp
Vaportite Industrial Refrigerated Case

Typical Applications

Parking Garage · Cold Storage · Canopy · Warehouse · Food Processing · Manufacturing · Complex Environments

Interactive Menu

· Order Information page 2
· Photometric Data page 3
· Product Warranty

Product Certification

Product Features

LINEAR DISCONNECT
Designed to provide safe and convenient means of disconnecting power

Top Product Features

· 2ft, 4ft, and 8ft Sealed and Gasketed Vaportite
· Lumen packages up to 22K lumens
· High-Performance efficacy up to 150 LPW
· LEDs available in 3000K, 3500K, 4000K and 5000K at 80 CRI
· Rated for -40c to 35c ambient
· Impact protection rating IK06 Lens and IK06 Housing
· Options to meet Buy American and other domestic preference requirements

Dimensional and Mounting Details

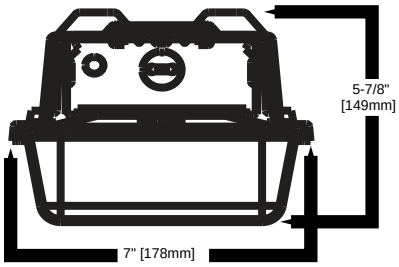

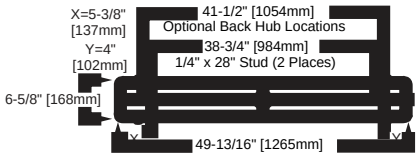

ZW-SWPD3 Sidecar

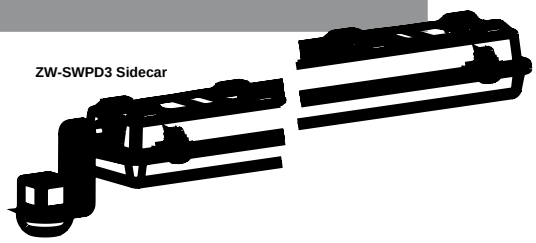

Installation Data

MOUNTING BRACKETS
Furnished
Two per 2' and 4' Unit
Four per 8' Unit

OPTIONAL CHAN HANGING SET
(VT2-CHAIN/SET-U)
Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks
Order One (1) Kit for each 2' or 4' Fixture

COOPER Lighting Solutions
a business

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : METALUX
Model Number : 4VT2-LD5-4-DR-UNV-L840-CD1-WL-U

Type : LA

Metalux — 4' Vaportite LED

Order Information

SAMPLE ORDER NUMBER: 4VT2-LD5-4-DR-UNV-L840-CD1-WL-U

Domestic Preferences	Series	Lamp Type	LED Lumens Output	Lens	Distribution	Voltage	Remote Emergency Enclosure
[Blank]=Standard **BAA**=Buy American Act **TAA**=Trade Agreements Act	**4VT2**=4' Vaportite	**LD5**=LED 5.0	**4**=4000 Lumens **6**=6000 Lumens **8**=8000 Lumens **11**=11000 Lumens	**DR**=Internal Prismatic Lens/15% DR High Impact Additive **DR100**=Internal Prismatic Lens/100% DR High Impact Additive **FR50**=Frosted Lens/15% DR High Impact Additive[3]	**[Blank]**=Medium (Standard) **W**=Wide Distribution	**347V**=347 Volt **UNV**=Universal Voltage 120-277	**EL10W**=10-watt, 120-277V emergency battery pack installed[4] **VT-REM-EL**=Remote Emergency Installed, 700 lumens[4]
Notes (1) Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.	**Notes** (2) DesignLights Consortium® Qualified and classified for both DLC Standard and DLC Premium, refer to www.designlights.org for details.			**Notes** (3) Not available in wide distribution.			**Notes** (4) EL must specify 120-277V

CCT	Driver Type	Label	Options	Packaging	Accessories
L830=3000K, LED **L835**=3500K, LED **L840**=4000K, LED **L850**=5000K, LED	**CD1**=1 Dimming Driver **5LTD1**=Fifth Light DALI	**WL**=Wet Location Label	**SSL**=Stainless Steel Latches **GL**=Single Element Fuse **TH**=(2) Top Watertite Hubs **TEH**=(2) Top and (2) End Watertite Hubs (all Watertite Hubs have 1/2" Conduit Entry) **MS**=Damp Listed Motion Sensor, Non-dimming **MSWL20**=Wet Listed Motion Sensor, Non-dimming, 20ft max mounting height **WPS4**=WaveLinx Wireless Sensor, Sidecar mount, with 1200 sq ft. coverage[5] **WLS4**=WaveLinx Lite Wireless Integrated Sensor, 15'-40' Mounting Height[5][6] **OF1DZ**=Leviton 120-277V PIR Occupancy Sensor with integral 0-10V Dimming[7][8]	**U**=Unit Pack	**VT2-Chain/Set-U**=Chain Hanging Set. Includes 6 ft. of chain, 4 large S-Hooks and 4 small S-Hooks. Order One (1) Kit for each 2' or 4' Fixture **VT2-SSMBK**=Stainless Steel Mounting Bracket
			Notes (5) Not available in 11,000 lumen fixture. Not available with 347V, 480V, or UNC. Not available with 5LTD option. (6) WaveLinx LITE devices are not currently compatible with the WaveLinx PRO Wireless Area Controller. (7) Available for UNV (for 120V or 277V) only. (8) Configuration of basic and advanced features using the Leviton Smart Sensor App on any Bluetooth-enabled Android or iOS device.		**Notes** (9) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

Product Specifications

Construction
- Rugged and durable construction
- Fiberglass housing is reinforced polyester and self-extinguishing (ASTM-D635-74) plastic
- Full metal fixture liner
- Watertight housing
- 1/2 " conduit entry at each end of housing (standard) for continuous feed
- Polyurethane gasketing provides a continuous seamless seal for the diffuser lens
- Four sturdy cam latches clamp diffuser tightly for a positive seal between housing, gasketing and diffuser
- Surface or chain mounting
- Impact protection rating IK06 Lens and IK06 Housing

WaveLinx LITE devices are not currently compatible with the WaveLinx PRO Wireless Area Controller

Electrical
- Long-Life LED system coupled with electrical driver for optimal performance
- LED·s available in 3000K, 3500K, 4000K and 5000K with a CRI · 80
- Projected life is 60,000 hours at 91% lumen output
- Electronic drivers are available for 120-277V applications
- 0-10V dimming control (standard)
- Operating temperature of -40°C to 35°C; Ideal for cold storage environments

Lens
- High-impact diffuser lens
- Internal Prismatic Lens with 15% DR High Impact Additive (DR) or Internal Prismatic Lens with 100% DR High Impact Additive (DR100)
- Frosted Lens with 15% DR High Impact Additive (FR50) option

Finish
- Housing is permanent pearl gray color

Warranty
- Five-year limited warranty

Compliance
- UL/cUL listed for Wet location
- RoHS compliant
- LED modules comply with IESNA LM-79 and LM-80 standards
- NSF listed
- DesignLights Consortium® Qualified and classified for both DLC Standard and DLC Premium (refer to www.designlights.org for details)
- The VT2 Series ratings apply to Horizontal Mounting only

Job Name : VANTAGE LIFT STATION 395 AC WEIR
Manufacturer : METALUX
Model Number : 4VT2-LD5-4-DR-UNV-L840-CD1-WL-U

Type : LA

Metalux — 4' Vaportite LED

Photometric Data

View IES files



4VT2-LD5-6-DR-UNV-L840-CD1-WL-U
Electronic Driver
Linear LED 4000K
Spacing criterion: (II) 1.21 x mounting height, (•) 1.22 x mounting height
Lumens: 6197
Input Watts: 50.6W
Efficacy: 122.5 lm/W
Test Report: 4VT2-LD5-6-DR-UNV-L840-CD1-WL-U.IES



4VT2-LD5-6-DR-W-UNV-L840-CD1-WL-U
Electronic Driver
Linear LED 4000K
Spacing criterion: (II) 1.22 x mounting height, (•) 1.6 x mounting height
Lumens: 5931
Input Watts: 50.6W
Efficacy: 117.2 lm/W
Test Report: 4VT2-LD5-6-DR-W-UNV-L840-CD1-WL-U.IES

Energy and Performance Data

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
25°C	> 91%	> 237,000

Shipping Data

Catalog No.	Wt.
4VT2-LD5	18 lbs.

IK Rating

VT2	IK Rating
Lens	IK06
Housing	IK06

Input Watts:
4VT2-LD5-4 (4,000 lumens)=30W
4VT2-LD5-6 (6,000 lumens)=51W
4VT2-LD5-8 (8,000 lumens)=58W
4VT2-LD5-11 (11,000 lumens)=82W

COOPER Lighting Solutions a business

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

© 2024 Cooper Lighting Solutions
All Rights Reserved.

Specifications and dimensions subject to change without notice.