


The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

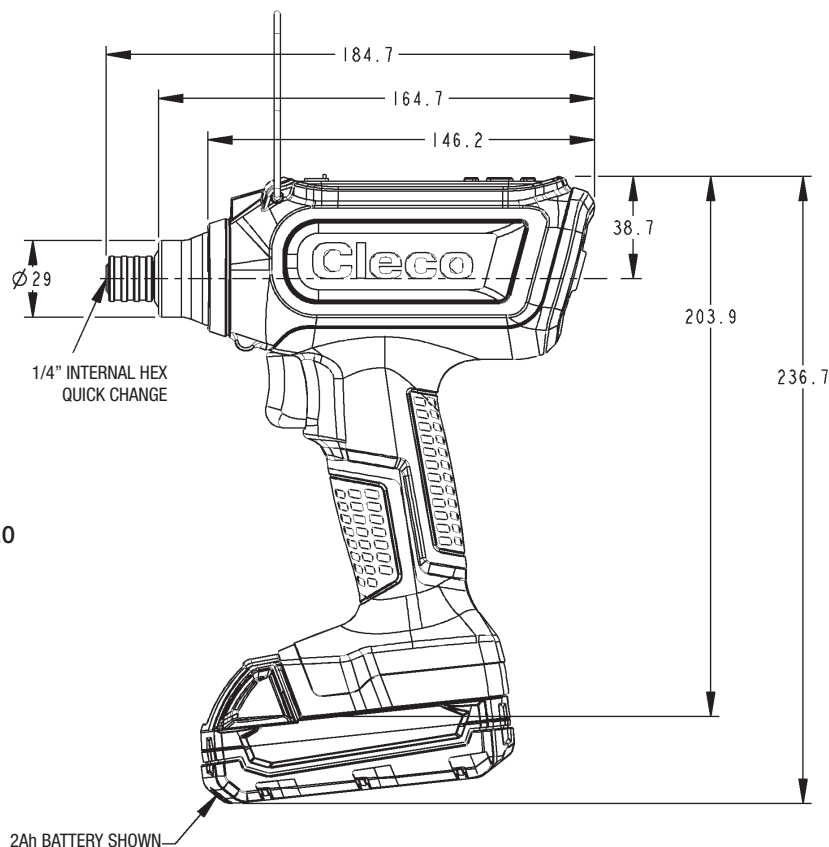

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 1.2 - 4

TORQUE RANGE (ft-lb)

Min / Max: 0.9 - 2.9

SPEED

r/min: 2480

WEIGHT & DIMENSIONS


Weight w/o Battery 0.98 kg / 2.16 lb
 Length 185 mm / 7.27 in
 Height 204 mm / 8.03 in
 Side to Center 29 mm / 1.14 in
 Output 1/4" Hex Quick Change
 Country of Origin: Assembled in USA



The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

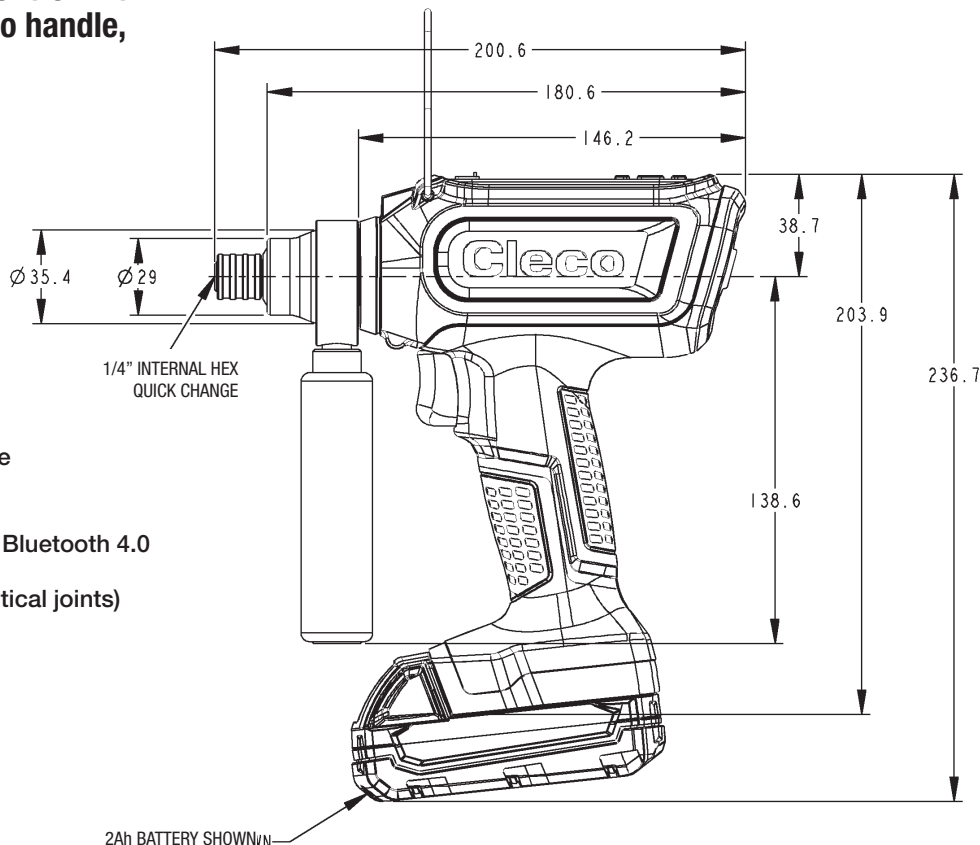

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 3.6 - 12

TORQUE RANGE (ft-lb)

Min / Max: 2.7 - 8.8

SPEED

r/min: 800

WEIGHT & DIMENSIONS


Weight w/o Battery 1.05 kg / 2.32 lb
 Length 201 mm / 7.89 in
 Height 204 mm / 8.03 in
 Side to Center 29 mm / 1.14 in
 Output 1/4" Hex Quick Change
 Country of Origin: Assembled in USA



The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

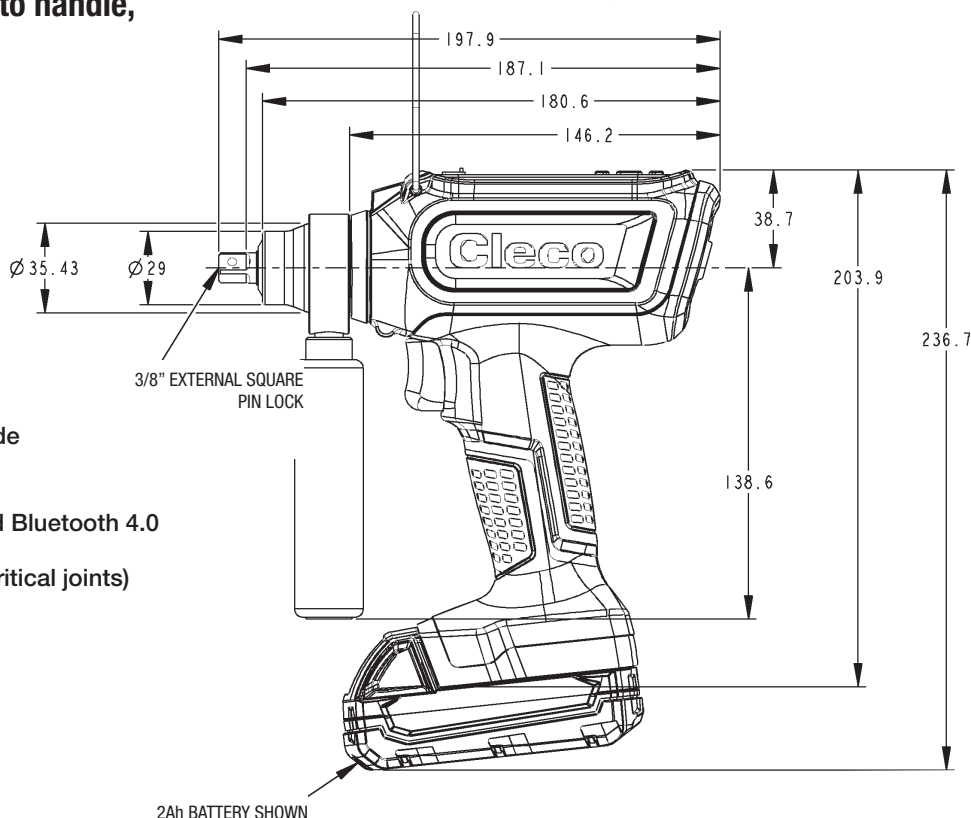

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 3.6 - 12

TORQUE RANGE (ft-lb)

Min / Max: 2.7 - 8.8

SPEED

r/min: 800

WEIGHT & DIMENSIONS


Weight w/o Battery 1.05 kg / 2.32 lb
 Length 198 mm / 7.79 in
 Height 204 mm / 8.03 in
 Side to Center 29 mm / 1.14 in
 Output 3/8" Square Drive
 Country of Origin: Assembled in USA



The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

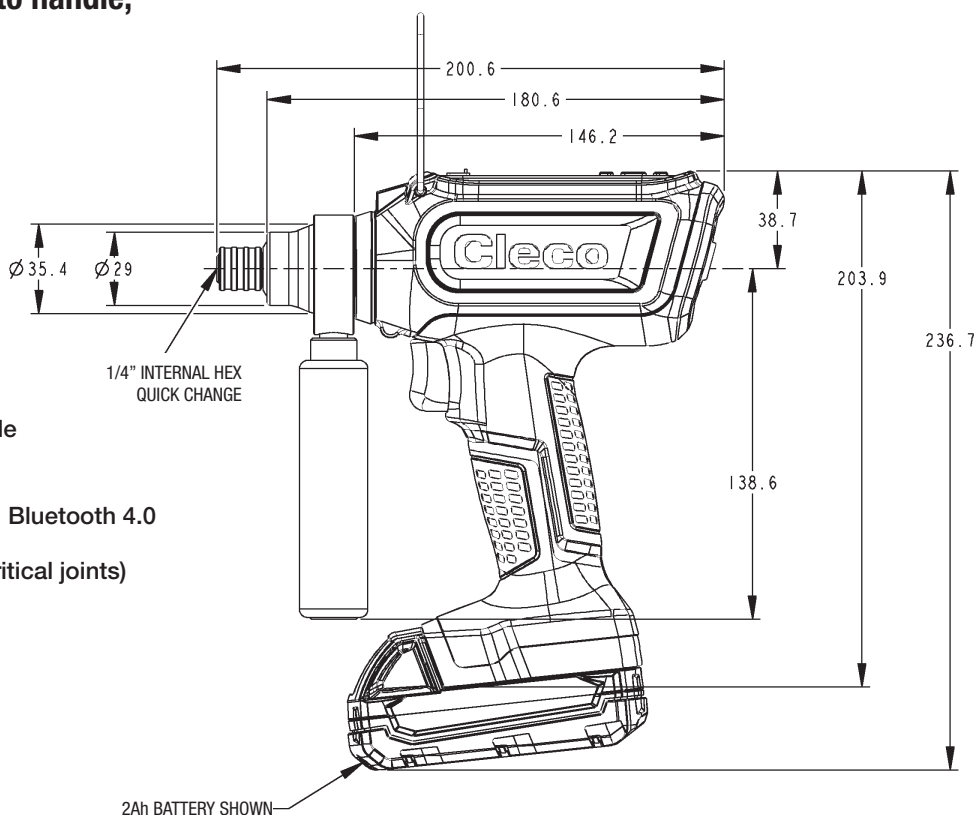

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 6.6 - 22

TORQUE RANGE (ft-lb)

Min / Max: 4.9 - 16.2

SPEED

r/min: 430

WEIGHT & DIMENSIONS


Weight w/o Battery 1.05 kg / 2.32 lb
 Length 201 mm / 7.89 in
 Height 204 mm / 8.03 in
 Side to Center 29 mm / 1.14 in
 Output 1/4" Hex Quick Change
 Country of Origin: Assembled in USA



The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

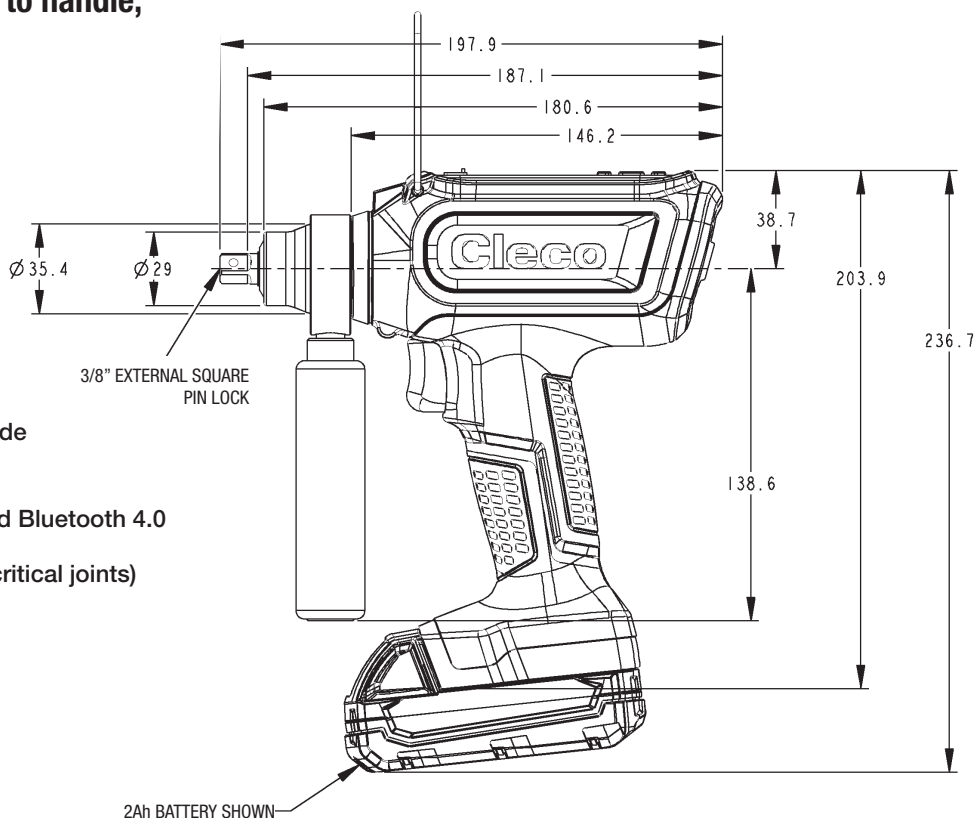

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 6.6 - 22

TORQUE RANGE (ft-lb)

Min / Max: 4.9 - 16.2

SPEED

r/min: 430

WEIGHT & DIMENSIONS

Weight w/o Battery 1.05 kg / 2.32 lb
 Length 198 mm / 7.79 in
 Height 204 mm / 8.03 in
 Side to Center 29 mm / 1.14 in
 Output 3/8" Square Drive
 Country of Origin: Assembled in USA



Product Specifications

CCBAW153

15 Nm RIGHT ANGLE
4.5 - 15 Nm (3.3 - 11.0 ft-lbs)

The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 4.5 - 15

TORQUE RANGE (ft-lb)


Min / Max: 3.3 - 11.0

SPEED

r/min: 570

WEIGHT & DIMENSIONS

Weight w/o Battery 1.70 kg / 3.75 lb
 Length 456 mm / 17.95 in
 Height 88 mm / 3.46 in
 Side to Center 31.8 mm / 1.25 in
 Output 3/8" Square Drive
 Country of Origin: Assembled in USA

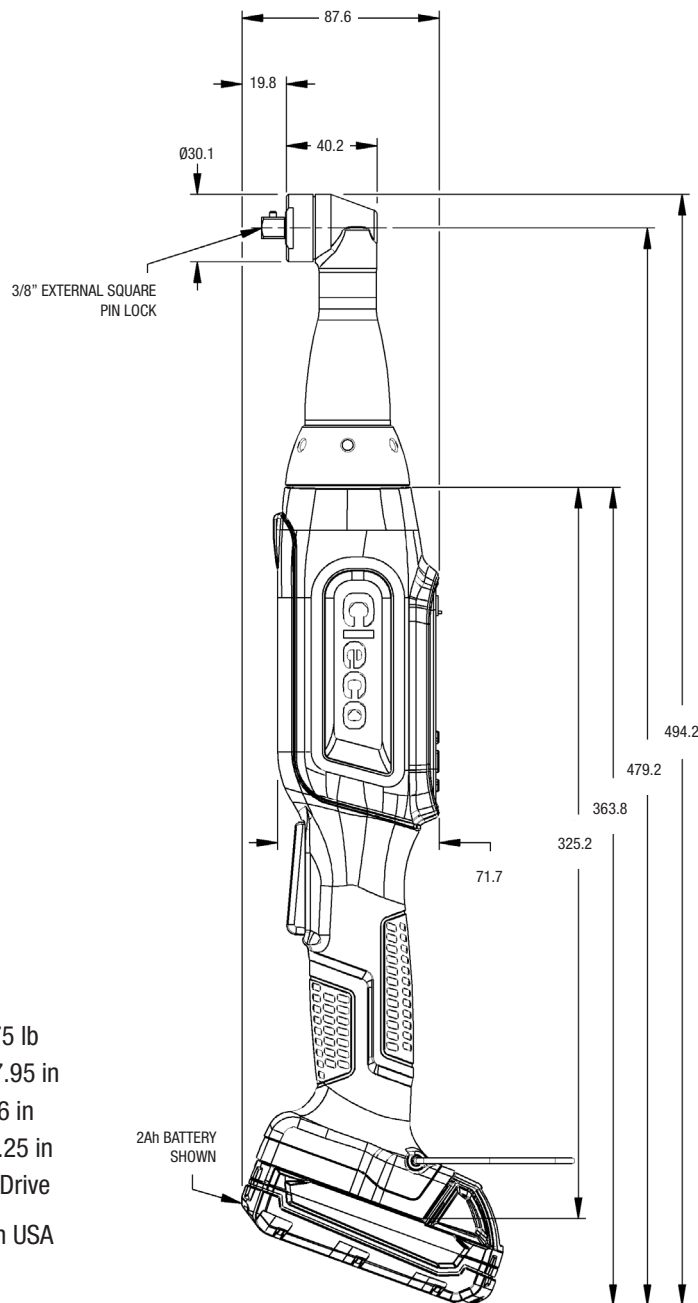

Product Specifications

CCBAW253

25 Nm RIGHT ANGLE
7.5 - 25 Nm (5.5 - 18.4 ft-lbs)

The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 7.5 - 25

TORQUE RANGE (ft-lb)


Min / Max: 5.5 - 18.4

SPEED

r/min: 305

WEIGHT & DIMENSIONS

Weight w/o Battery 1.70 kg / 3.75 lb
 Length 456 mm / 17.95 in
 Height 88 mm / 3.46 in
 Side to Center 31.8 mm / 1.25 in
 Output 3/8" Square Drive
 Country of Origin: Assembled in USA

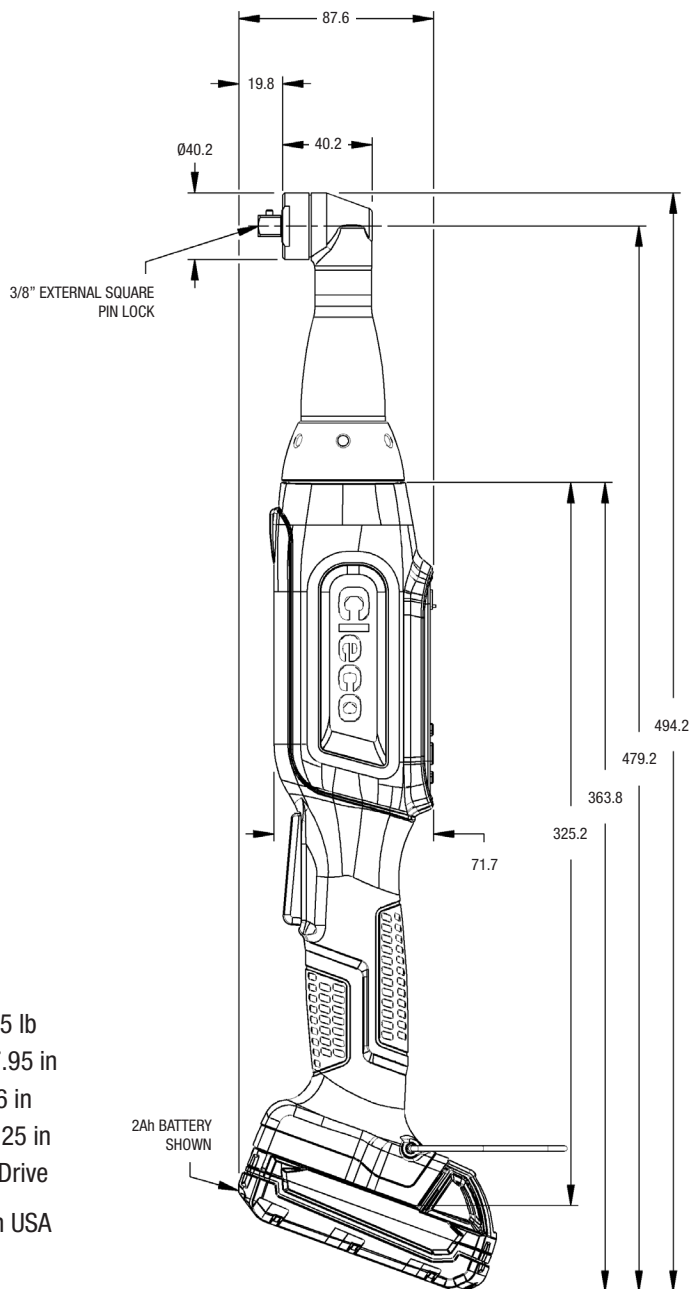

Product Specifications

CCBAW353

35 Nm RIGHT ANGLE
10.5 - 35 Nm (7.7 - 25.8 ft-lbs)

The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 10.5 - 35

TORQUE RANGE (ft-lb)


Min / Max: 7.7 - 25.8

SPEED

r/min: 255

WEIGHT & DIMENSIONS

Weight w/o Battery 1.95 kg / 4.30 lb
 Length 486 mm / 19.15 in
 Height 92 mm / 3.63 in
 Side to Center 31.8 mm / 1.25 in
 Output 3/8" Square Drive
 Country of Origin: Assembled in USA

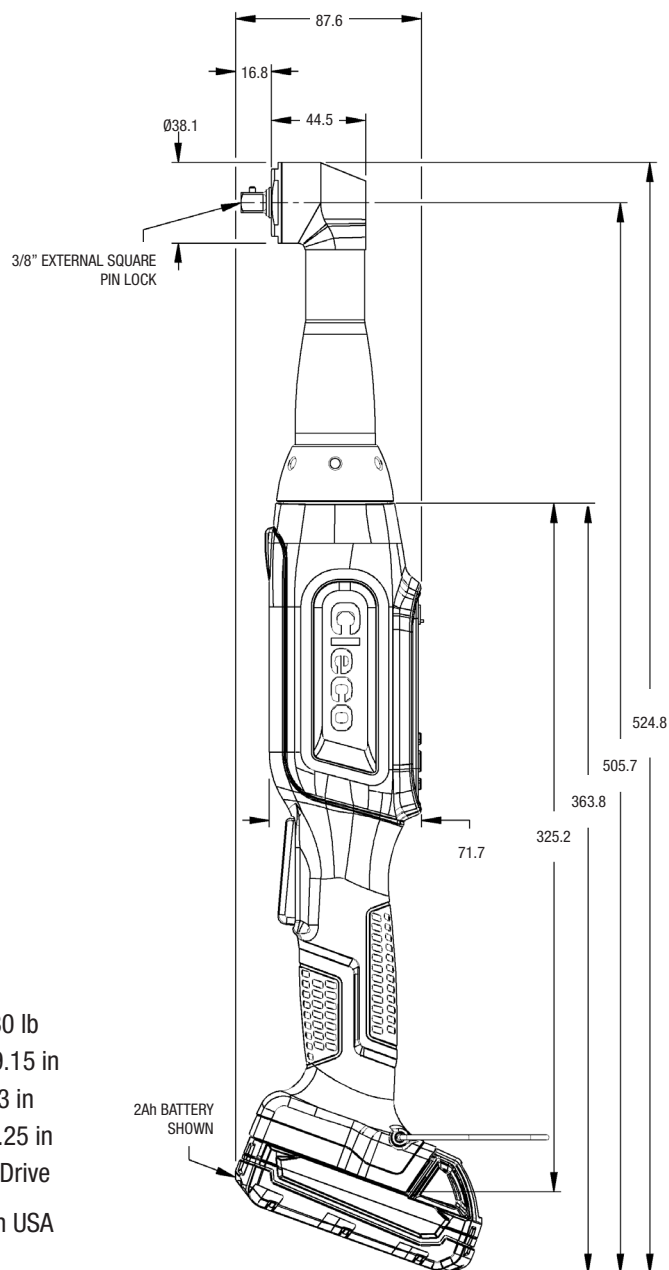

Product Specifications

CCBAW503

15 Nm RIGHT ANGLE
15 - 50 Nm (11.1 - 36.8 ft-lbs)

The new CellCore™ Cordless Assembly Tools are smart, durable and designed to withstand the toughest environment, putting you in control with cordless assembly tools that are easy to handle, and hard to break.

FEATURES

- Forward and backward compatibility with Cleco's entire Global Controller platform
- Color Worklight on the tool for secondary okay/not okay visual feedback
- "Stay Alive" function prevents reboot during battery change, gaining time and efficiency
- On-tool Digital Transducer and Servo provide critical information and eliminate errors
- Connects easily over Wifi 2.4 & 5.0 GHz and Bluetooth 4.0
- Accuracy (Cm/Cmk 2.0 @ 10% for quality critical joints)
- Compatible with:
 - mPro200GC
 - mPro200GC-AP
 - mPro400 Family

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 15 - 50

TORQUE RANGE (ft-lb)


Min / Max: 11.1 - 36.8

SPEED

r/min: 165

WEIGHT & DIMENSIONS

Weight w/o Battery 2.00 kg / 4.41 lb
 Length 499 mm / 17.95 in
 Height 92 mm / 3.63 in
 Side to Center 31.8 mm / 1.25 in
 Output 3/8" Square Drive
 Country of Origin: Assembled in USA

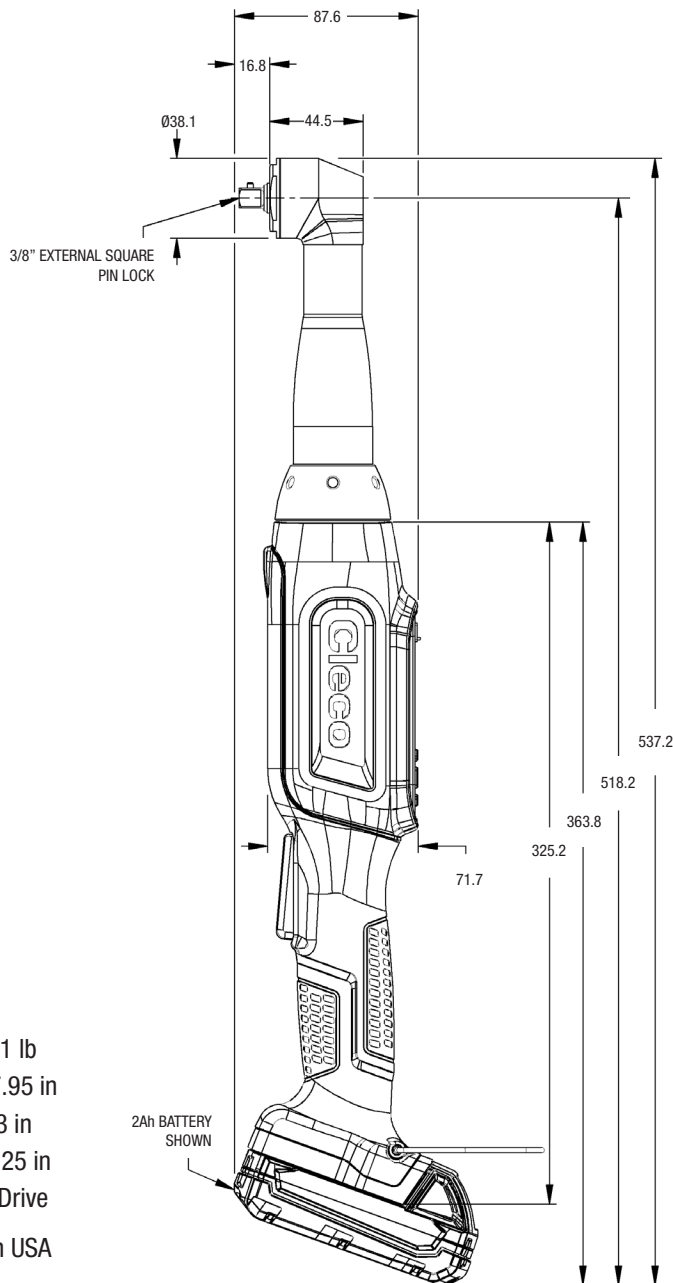

Product Specifications

mPro200GC

CONTROLLER

The mPro200 Controller can be connected to 10 Cleco cordless tools. Easily capture and communicate data in real time within a plant network. Connect to the controller via mPro remote or external monitor.

FEATURES

- Compact - Save space on the line (4.5" vs 10.5" on GC-400)
- Intelligent - 19 fastening strategies for all types of applications
- Easy to Use - Run remotely via mPro remote, or connect an external display using VGA output
- Increase Uptime - Swap controllers quickly with interchangeable CompactFlash card
- Versatile - Compatible with CellCore, LiveWire and I-Wrench



SPECIFICATIONS

TOOL COMPATABILITY

CellCore, LiveWire, I-Wrench

WEIGHT & DIMENSIONS

Weight	3.23 kg / 7.1 lb
Width	113 mm / 4.4 in
Height	340 mm / 13.4 in
Depth	320 mm / 12.6 in



INPUTS & OUTPUTS

2X Fieldbus
2X Ethernet
2X Serial RS-232
3X USB
1X VGA Output
8X 24V I/O
1X Power Input

Product Specifications

mPro200GC-AP

CONTROLLER WITH ACCESS POINT

The mPro200 Controller can be connected to 10 Cleco cordless tools. Easily capture and communicate data in real time within a plant network. Connect to the controller via mPro remote or external monitor.

FEATURES

- Compact - Save space on the line (4.5" vs 10.5" on GC-400)
- Intelligent - 19 fastening strategies for all types of applications
- Easy to Use - Run remotely via mPro remote, or connect an external display using VGA output
- Increase Uptime - Swap controllers quickly with interchangeable CompactFlash card
- Versatile - Compatible with CellCore, LiveWire and I-Wrench



SPECIFICATIONS

TOOL COMPATABILITY

CellCore, LiveWire, I-Wrench

WEIGHT & DIMENSIONS

Weight	3.43 kg / 7.5 lb
Width	113 mm / 4.4 in
Height	340 mm / 13.4 in
Depth	320 mm / 12.6 in



INPUTS & OUTPUTS

2X Fieldbus
2X Ethernet
2X Serial RS-232
3X USB
1X VGA Output
8X 24V I/O
1X Power Input