


GenCO

SPECIFICATIONS

- 5,000 or 10,000 PSI WP
- PEEK insulated #4 conductor wire
- Current Rating 300 Amps
- Temperature Rating 350 Degrees
- 3/8 or 12MM systems

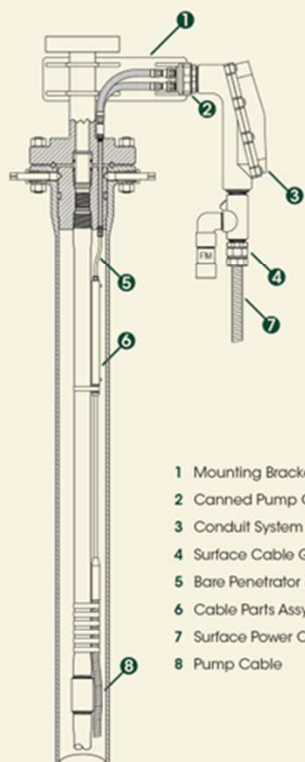

- 1 Mounting Bracket
- 2 Canned Pump Coupling
- 3 Conduit System
- 4 Surface Cable Gland
- 5 Bare Penetrator (3/8 or 12MM)
- 6 Cable Parts Assy
- 7 Surface Power Cable
- 8 Pump Cable


www.gencoinc.com info@gencoinc.com

GPS-5

GenCO

SPECIFICATIONS

- 3,000 PSI WP
- 7,500 PSI Proof Test
- Current Rating 250 Amps
- Temperature Rating 350 Degrees

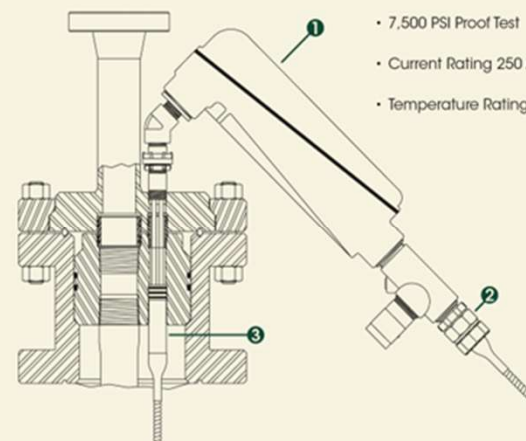

- 1 Conduit System
- 2 Surface Cable Gland
- 3 Feed-Thru Assy


www.gencoinc.com info@gencoinc.com

GPS-3

Genco

SPECIFICATIONS

- 5,000 PSI WP
- 7,500 PSI Proof Test
- Current Rating 250 Amps
- Dual Barrier System

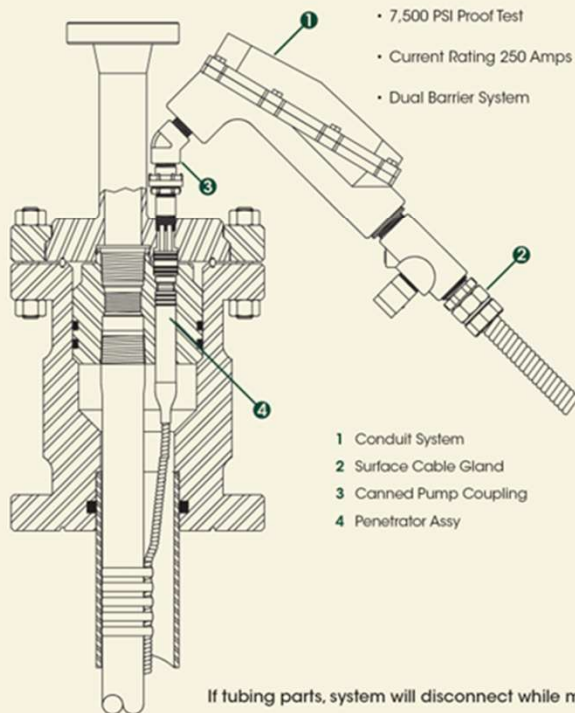

If tubing parts, system will disconnect while maintaining well control.

www.gencosystemsinc.com info@gencosystemsinc.com


GPS-5D

Patents pending

Genco

SPECIFICATIONS

- 5,000 PSI WP
- PEEK Insulated #4 conductor wire
- Current Rating 250 Amps
- Temperature Rating 350 Degrees
- Three-hole 3/8" tube thru wellhead
- Dual barrier
- No splice below hanger

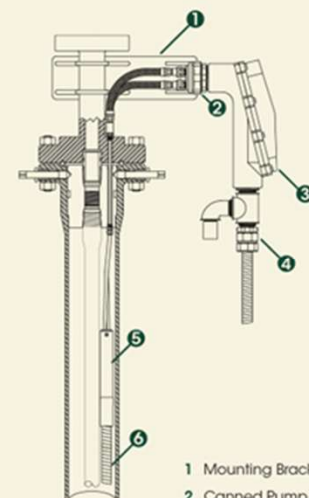

- 1 Mounting Bracket
- 2 Canned Pump Coupling
- 3 Conduit System
- 4 Surface Cable Gland
- 5 Feed-Thru Assy
- 6 Pump Cable #4, #2


www.gencosystemsinc.com info@gencosystemsinc.com

GPS-5D1

Genco

SPECIFICATIONS

- 5,000 or 10,000 PSI WP
- PEEK Insulated #4 conductor wire
- Current Rating 300 Amps
- Temperature Rating 350 Degrees
- Multi-port or Dual-string

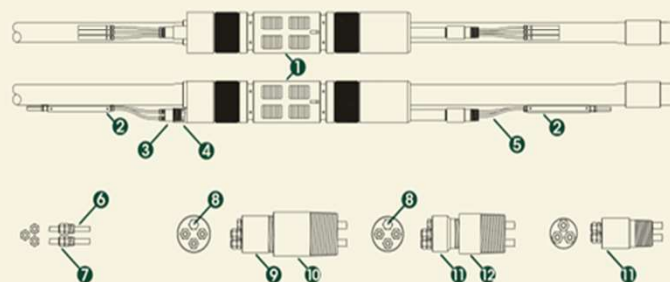

- | | |
|---|---|
| 1 Packer | 7 12MM x 3/8 Fittings |
| 2 Cable Parts | 8 Injection Line Port |
| 3 See Options 4-12 | 9 2-3/8 E.U.E. x 3/8 NPT Manifold Bushing |
| 4 2-7/8 E.U.E. 8 Rd. or 1.900 N.U. 10 Rd. | 10 2-7/8 x 2-3/8 E.U.E. Crossover |
| 5 Packer Penetrator 12MM | 11 1.900 N.U. x 3/8 NPT Manifold Bushing |
| 6 12MM Tube | 12 2-7/8 E.U.E. x 1.900 N.U. Crossover |

www.gencosystemsinc.com info@gencosystemsinc.com

GPS-5-P

