


DETAIL A — RAFTER CUT GEOMETRY

1. PLUMB CUT AT TOP OF RAFTER (ELEVATION VIEW)


Miter angle = 18.43° (matches 4:12 roof pitch)



2. SIDE BEVEL AT TOP CUT (PLAN VIEW LOOKING DOWN)

Blade bevel = 15.6° — rafter cheek to fit flush on 60° hub face

HUB FACE (60° HEXAGON)




SAW SETUP — COMPOUND MITER SAW

Miter angle: 18.43° (4:12 pitch)
Blade bevel: 15.6° (hex face fit)
Feed direction: mark CROWN side up
All 6 rafter top cuts: IDENTICAL — do not reverse bevel
Test fit on scrap 4x6 before cutting all 6 pieces.
SDS screws: 2 per rafter, driven into hub after dry fit confirmed.

DETAIL B — HUB GEOMETRY


HUB — PLAN VIEW (LOOKING DOWN)

Regular hexagonal prism, 8x8 base stock (7.25" actual)
Six faces milled/planed to receive compound-cut rafter cheeks



HUB — SECTION / ELEVATION VIEW

Min 10 in tall. Lag screws driven from rafter into hub.

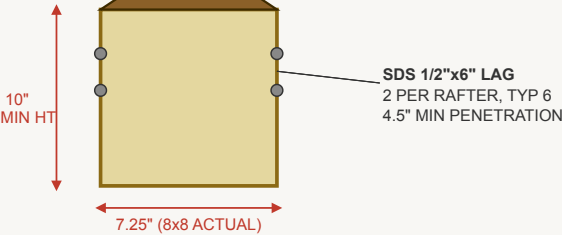

FABRICATION OPTIONS

Option A: Source 8x8 cedar turning blank, mill hex faces at millwork shop.
Option B: Laminate 3x 2x8 RS cedar. Glue + 3" GRK screws @ 6" o.c.
Hand-plane or saw 6 flat faces after glue-up cures (48 hr min).
Option C: Steel weld plate spider hub (fabricator quote separately).

RAFTER COMPOUND CUT DETAIL + HUB GEOMETRY DETAIL

Saanich, BC | Scale: FULL SIZE (1:1) / 1:4 hub | Sheet D04 | Date: 2026-04-19

CRITICAL: Set compound miter saw at 18.43° miter + 15.6° bevel. Test on scrap first. All 6 top cuts identical.