


## Bulk Metal® Foil Technology Tubular Axial-Lead Resistors, Meets or Exceed MIL-R-39005 Requirements



### Any value and tolerance available within resistance range

This series of axial leaded resistors is made using the same foil technology as the S102C. The difference is axial versus radial leads. Axial leads have the advantage of readily available auto insertion equipment while the radial leaded devices may require additional tooling. Also, when converting from metal film (RNC 55) to foil (VMTA 55) boards may already be laid out for the axial leaded device. It is worth noting that for new designs the S102C footprint is the smallest in the industry (taking into account the need for lead exit to board pad length allowance).

Our Application Engineering Department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

**TABLE 1 - TCR** (for values under 50R)

VALUES	0 °C to + 60 °C	- 55 to + 125 °C, + 25 °C Ref.
25R - 50R	± 5 ppm/°C	± 8 ppm/°C
15R - 24R999	± 6 ppm/°C	± 10 ppm/°C
5R - 14R999	± 8 ppm/°C	± 12 ppm/°C
1R - 4R999	± 15 ppm/°C	± 20 ppm/°C


### FEATURES

- Temperature Coefficient of Resistance (TCR):  
± 8 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)  
± 4 ppm/°C (0 °C to + 60 °C)
- Tolerance: to ± 0.01 %
- Load Life Stability:  
± 0.05 % at 25 °C, 2000 hours at Rated Power  
± 0.0025 % at 25 °C, 2000 hours at Low Power
- Electrostatic Discharge (ESD) above 25 000 Volts
- Resistance Range: 5 Ω to 500 kΩ
- Power Rating: 0.2 W to 1.0 W at 70 °C
- Non-Inductive, Non-Capacitive Design
- Thermal EMF: 0.1 μV/°C maximum, 0.05 μV/°C typical
- Voltage Coefficient: < 0.1 ppm/V
- Terminal Finishes available: Lead (Pb)-free  
Tin/Lead
- For better performances, please contact Application Engineering
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 48 hours. For more information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)



**RoHS\***  
COMPLIANT

**FIGURE 1 - POWER DERATING CURVE**

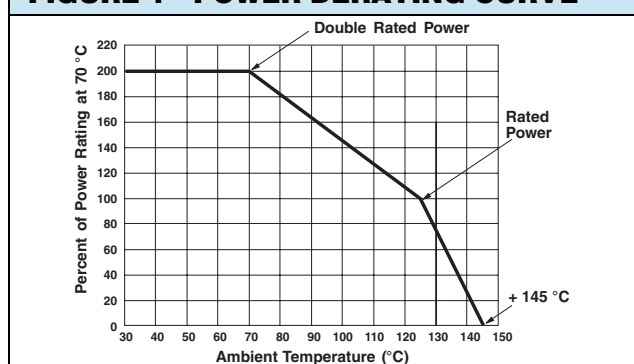

**TABLE 2 - MODEL SELECTION**

VISHAY MODEL	MIL STYLE	POWER		MAXIMUM WORKING VOLTAGE	RESISTANCE RANGE <sup>1)</sup> (Ω)	TIGHTEST TOLERANCE	TCR RANGE <sup>2)</sup>
		at + 70 °C	at + 125 °C				
VTA56	RBR56	0.25 W	0.125 W	300 V	5 to 24R9 25 to 150K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA55	RBR55	0.3 W	0.15 W	300 V	5 to 24R9 25 to 150K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA54	RBR54	0.5 W	0.25 W	300 V	5 to 24R9 25 to 300K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA53	RBR53	0.66 W	0.33 W	300 V	5 to 24R9 25 to 300K	± 0.1 % ± 0.01 %	V4 V3, V2
VTA52	RBR52	1.0 W	0.5 W	300 V	5 to 24R9 25 to 500K	± 0.1 % ± 0.01 %	V4 V3, V2
VMTA55	RNC55	0.2 W	0.1 W	200 V	5 to 49R9 50 to 30K	± 0.1 % ± 0.01 %	V4 V3, V2
VMTB60	RNC60	0.25 W	0.125 W	250 V	5 to 49R9 50 to 60K	± 0.1 % ± 0.01 %	V4 V3, V2

### Notes

1. For higher/lower resistance values, consult the Application Engineering Department
2. TCR options for values > 50 Ω  
V4 = ± 4 ppm/°C (0 to + 60 °C); ± 8 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)  
V3 = ± 3 ppm/°C (0 to + 60 °C); ± 5 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)  
V2 = ± 2 ppm/°C (0 to + 60 °C); ± 5 ppm/°C (- 55 °C to + 125 °C, + 25 °C Ref.)

\* Pb containing terminations are not RoHS compliant, exemptions may apply