

Flirt Skirt



ILLUSTRATED TUTORIAL

INTERMEDIATE



SIZES: XXS - 7XL

Pattern  *Couture*

Thank you so much for choosing our pattern!

Our goal is to make beautiful patterns that all our clients will enjoy sewing and also feel very proud wearing!

Happy Sewing !

If you ever need any help or if you have any questions you can always write to us on Etsy or on our e-mail address **help.patterns@gmail.com**

We wish you a wonderful day and a lot of fun with your sewing project.

Do not forget to share your finished result on Instagram (P.S. add us **@patterncouture_** for a chance to win a free sewing pattern.

XO Katya & Tobias


Table of Contents

Page Number	Table of Contents
1	Welcome and Contact Information
2	Table of Contents
3	About the Pattern / Sewing Supplies List
4	How to take body Measurements
5	Choosing your Size / Size Chart
6	Recommended Fabrics
7	Fabric Requirements
8	Printing Instructions
9	Pattern Assembly with Video Instructions
10 - 11	Pattern layout
12	Fabric Cutting Instructions
13	Fabric Layout
14	Sewing Tips and Tricks
15-21	Sewing Instructions
22	Final Looks


ABOUT THE PATTERN

Create a chic and playful look with the Flirt Skirt. This pattern features a flattering design which includes a shorts , classic pleated detailing, and an easy-to-sew construction. Perfect for any occasion, this skirt will become a staple in your wardrobe!

Front Look

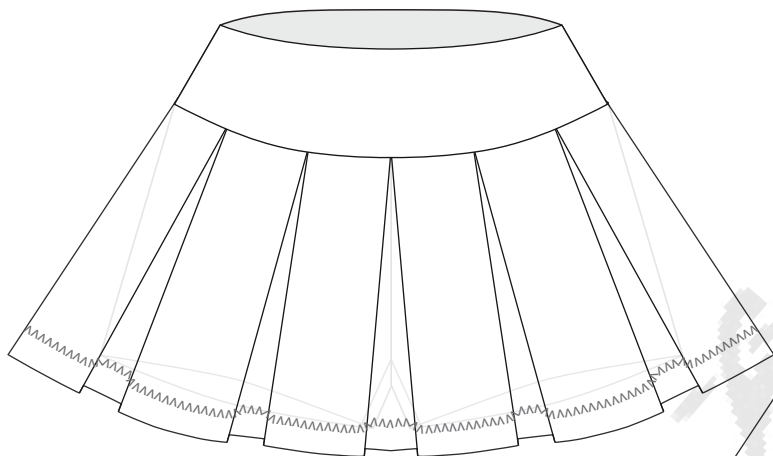

Back Look

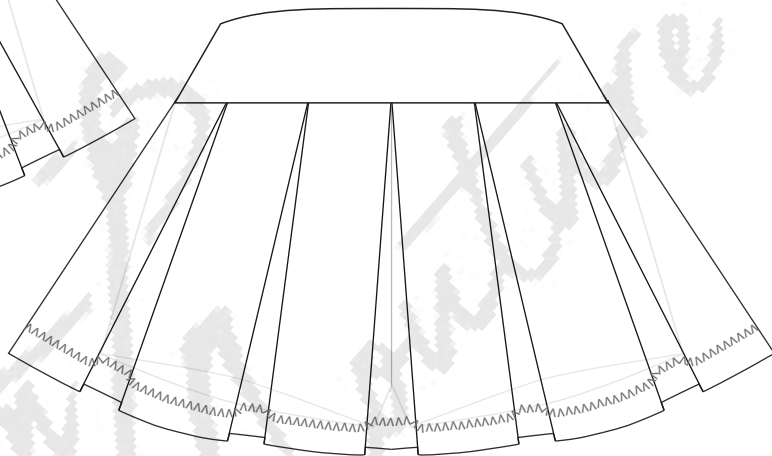

Sewing Supplies Checklist

- Sewing machine
- Serger (optional, but highly recommended)
- Sharp scissors (for fabric cutting)
- Rotary cutter and mat (for accurate cutting)
- Ruler
- Tape measure
- Thread
- Pins
- Seam ripper
- Iron and ironing board
- Fabric marking tools (chalk, markers, or pens)



Choosing Your Size

ATTENTION!

Our brand uses **different size charts** for different patterns.

Make sure to **check your size** for each project.

Also do not rely on the ready to wear garment size you buy in shops.

How to measure your size:

The best thing you can do is, to get a friend or a family member to help you.

The measurements should be taken in the same Underwear / undergarments in which you will wear the garment.



To ensure a perfect fit, compare your measurements to our size guide. For tops (dresses, blazers, coats, etc.), base your size selection on your bust circumference.

For bottoms (skirts, pants, shorts, etc.), use your hip circumference.


If your measurements fall between two sizes, choose the size that closest matches your measurement. For example, a bust measurement of 79cm (31") would correspond to size XXS.

When between sizes, consider the garment type:

- For close-fitting garments, size up if you're between sizes.
- For loose-fitting garments, size down if you're between sizes.

Important Note: If your measurements result in different sizes for bust, waist, and hip (e.g., size 36 for bust and size 40 for waist and hip), you'll need to adjust the pattern at the waist and hip lines to achieve a perfect fit.

Size Chart

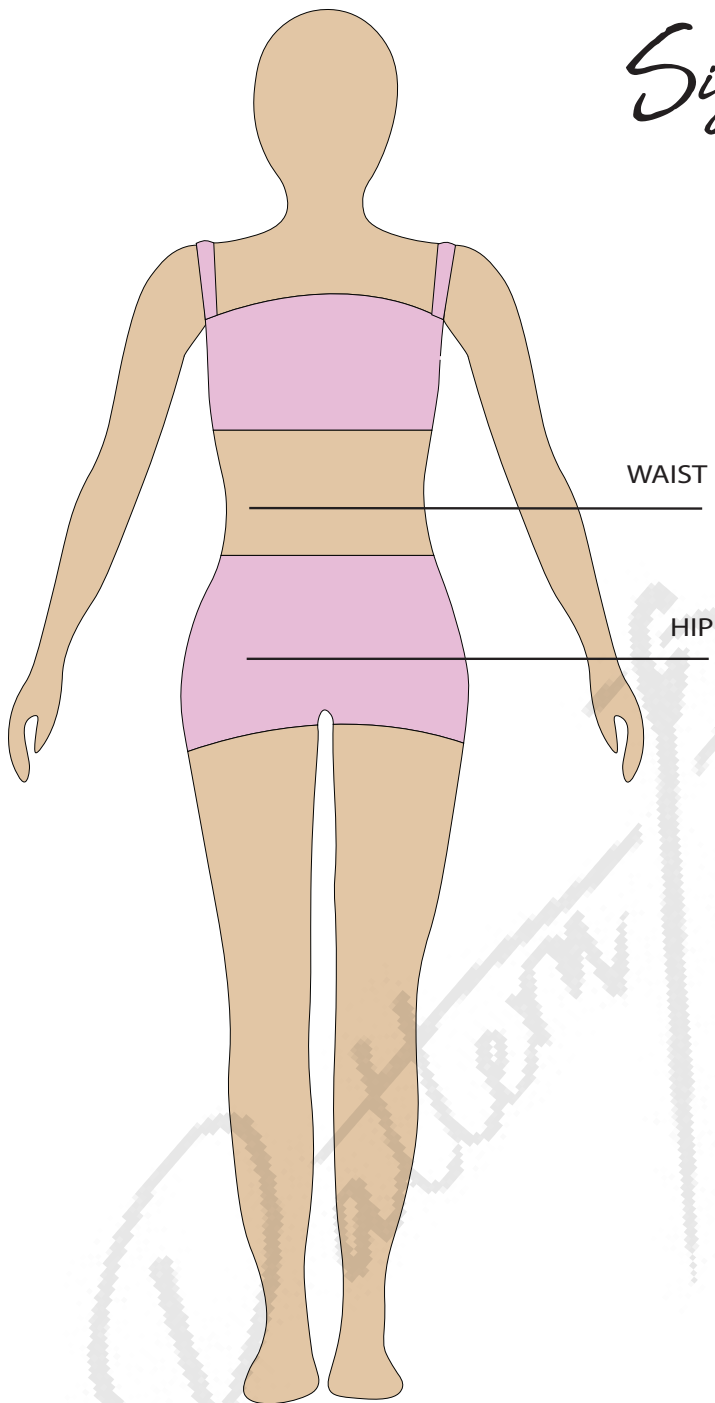

To sew this garment, you will need the following body measurements :

Waist
Hip

This pattern is drafted for a woman 165cm tall (5'5")

SIZE /CM	XXS	XS	S	M	L	XL	XXL	XXXL	4XL	5XL	6XL	7XL
WAIST	60	64	68	72	76	80	84	88	92	96	100	104
HIP	90	94	98	102	106	110	114	118	122	126	130	134

INCHES	XXS	XS	S	M	L	XL	XXL	XXXL	4XL	5XL	6XL	7XL
WAIST	23.6	25.2	26.8	28.3	29.9	31.5	33.1	34.6	36.2	37.8	39.4	40.9
HIP	35.4	37	38.6	40.2	41.7	43.3	44.9	46.5	48	49.6	51.2	52.8

Recommended Fabrics

Knits with 4 way 50% stretch and good recovery examples are:


Double Brushed Poly,
Rayon Spandex,
Cotton Lycra

Qatar Couture

Fabric Requirements

Amount of Fabric Required		XXS	XS	S	M	L	XL
150cm wide fabric	metre	2.04	2.06	2.08	2.10	2.12	2.14
60" wide fabric	yards	2.34	2.36	2.38	2.40	2.42	2.44
Amount of Fabric Required		XXL	XXXL	4XL	5XL	6XL	7XL
150cm wide fabric	metre	2.16	2.18	2.20	2.22	2.24	2.26
60" wide fabric	yards	2.46	2.48	2.50	2.52	2.54	2.56

Printing Instructions

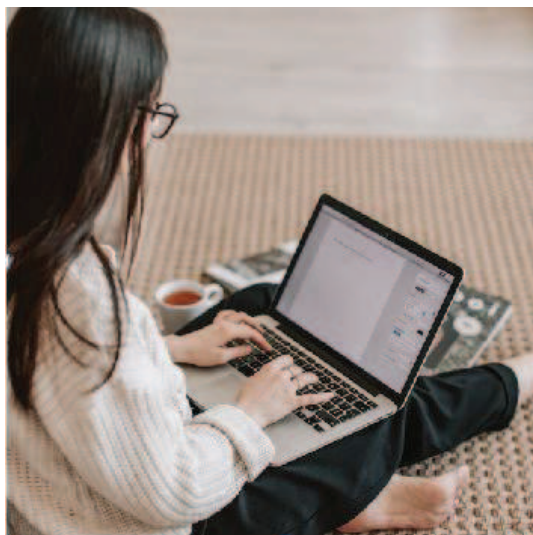

Printing Your Pattern Options:

- A4 and US Letter size: Print at home on your desktop computer (tiled versions that require assembly)
- A0 size: Print at a copy shop on a single large sheet of paper, saving you time and effort in assembling the pattern


Printing Note: To ensure accurate printing, please use Adobe Acrobat Reader software. Do not open or print the pattern in Microsoft Word. Download Adobe Acrobat Reader for free at <https://get.adobe.com/reader/>

Test Squares: Two test squares are included to verify your print scale. Ensure they measure 5cm x 5cm or 2" x 2". If not, adjust your printer settings and retry.

Important: Incorrect test square size will result in a pattern that does not sew to the correct size

PRINTING CHECKLIST !

- Select your layers
- Enter print pages
- Orientation set to auto
- Set scale to 100%
- Print the Test Page
- Check your scale

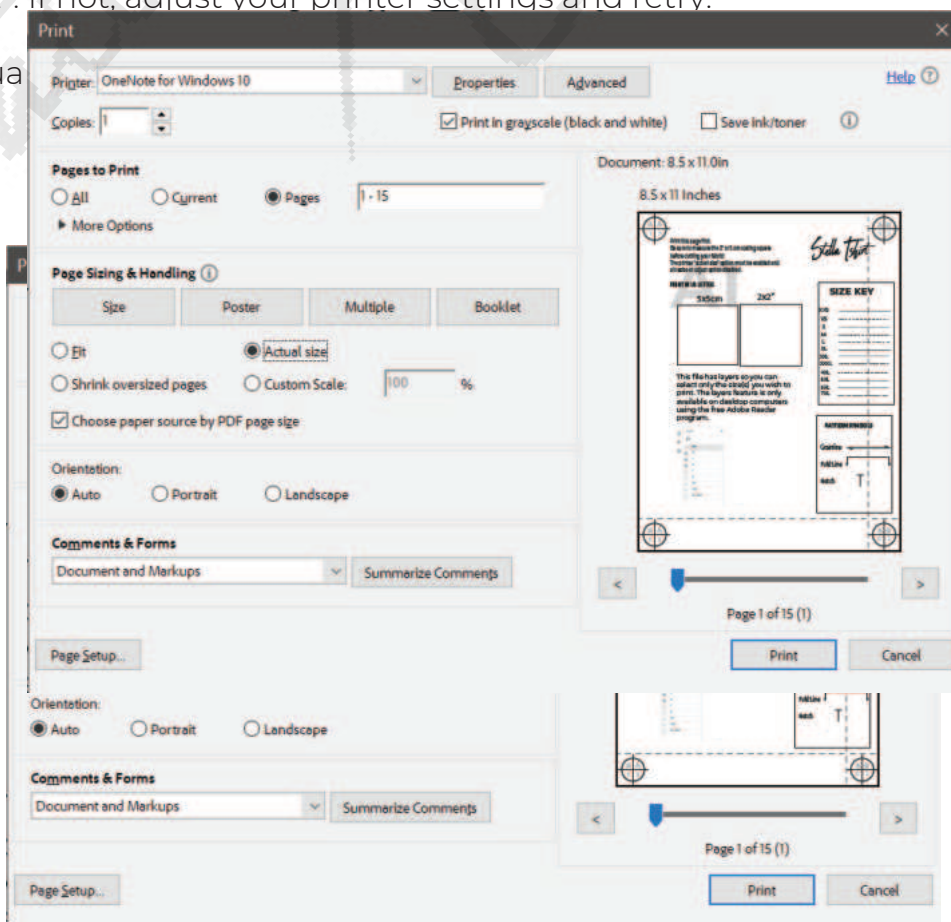

Pattern Assembly



PATTERN PRINTING AND ASSEMBLY VIDEO LINK:

<https://youtu.be/cOW1K41QOBQ>

Here is another example of how to assemble your pattern printouts.
Use the letter to assemble in columns example column A, B, C
Then use the numbers beside each letter to chronologically assemble the pages., example A1,A2,A3

A1	B1	C1
A2	B2	C2
A3	B3	C3
A4	B4	C4


Once the pages are aligned in columns as shown above , use the page margins to align the pages. The page below or beside it must touch the margin dotted line of the previous page.

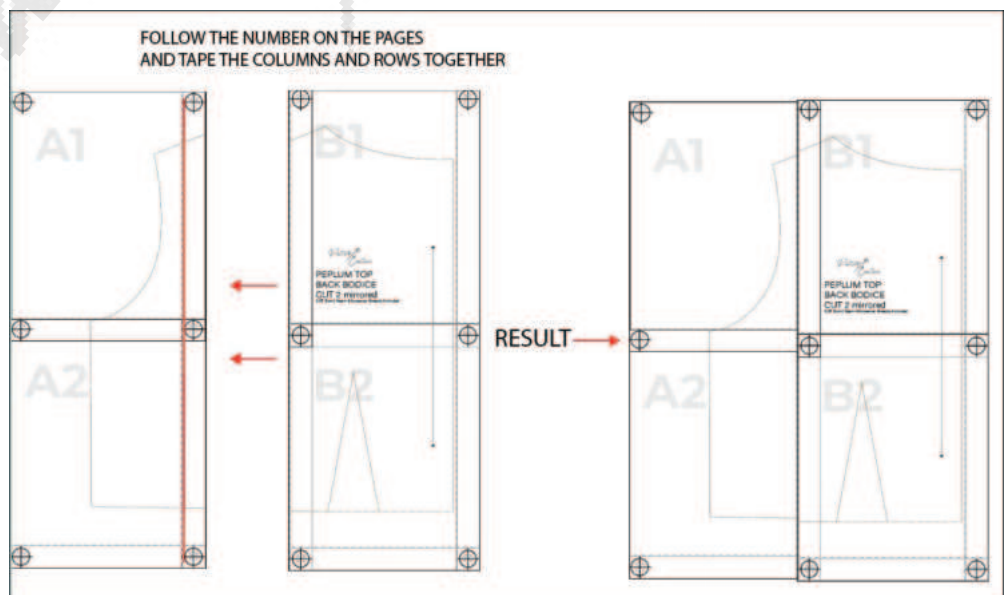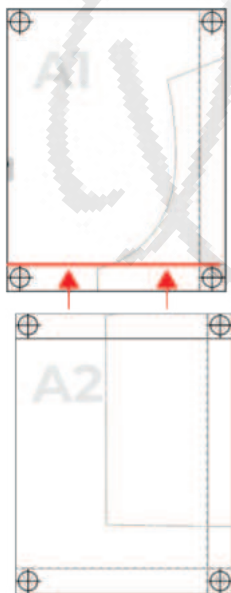


Pattern Layout

Assemble the pattern pages according to the guide on the previous page, following the numbered sequence to ensure correct assembly. When complete, your assembled pattern should resemble the image below


A0 LAYOUT

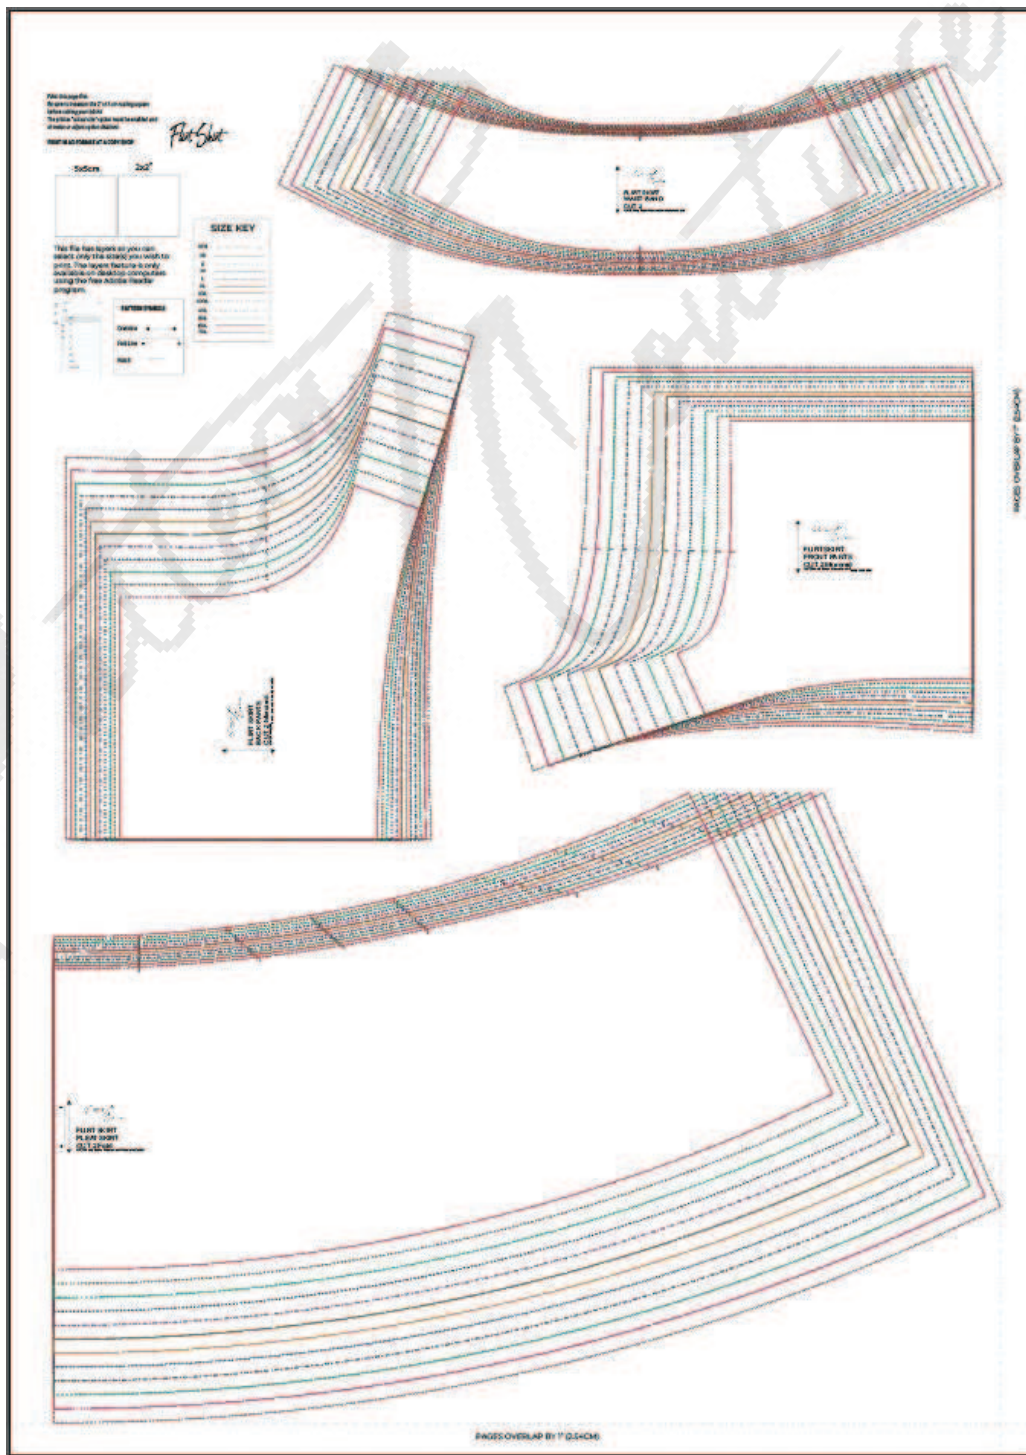

A4 LAYOUT

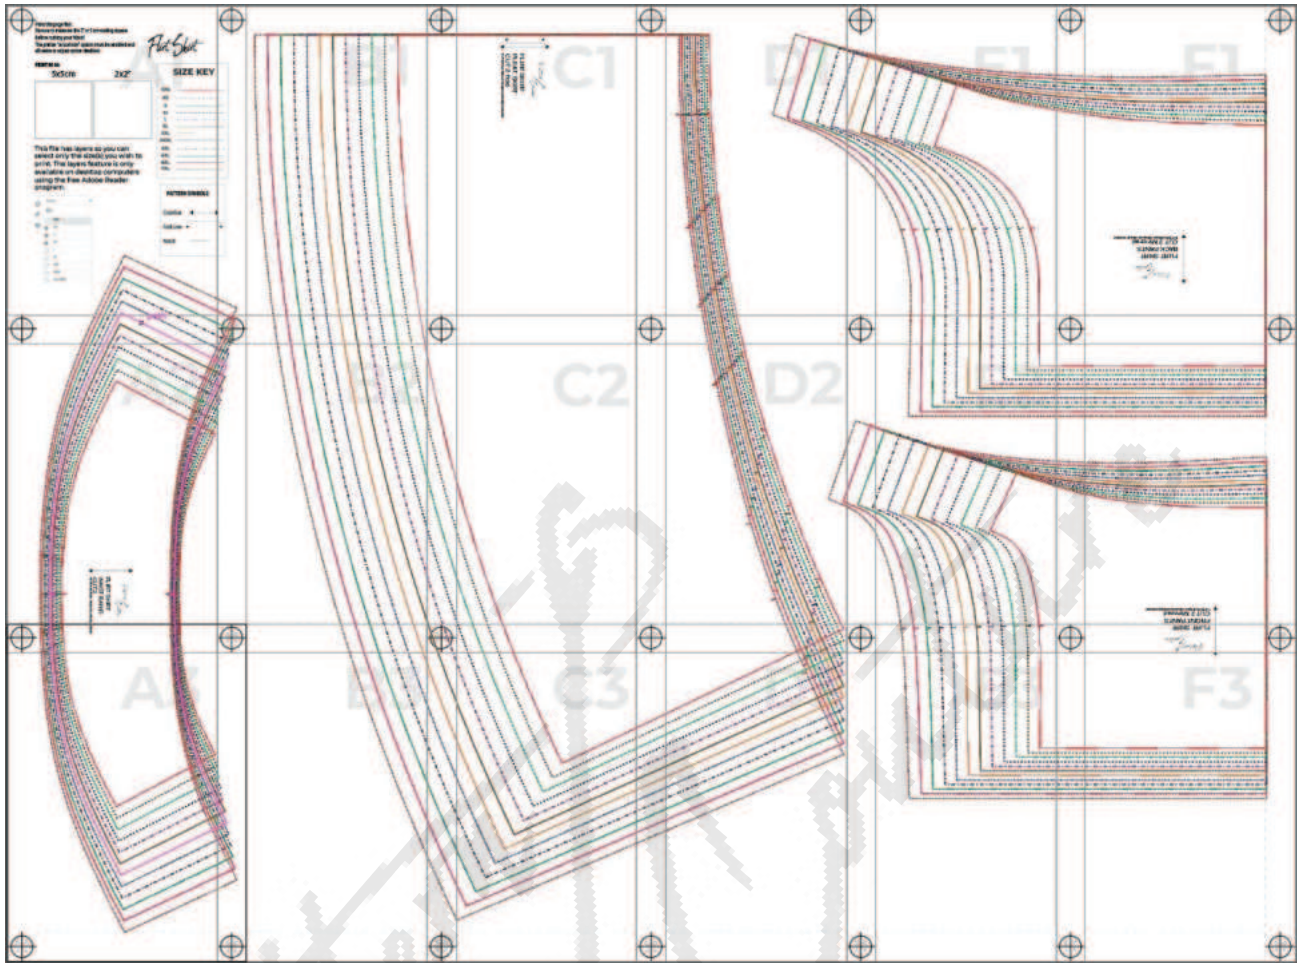


US LETTER LAYOUT

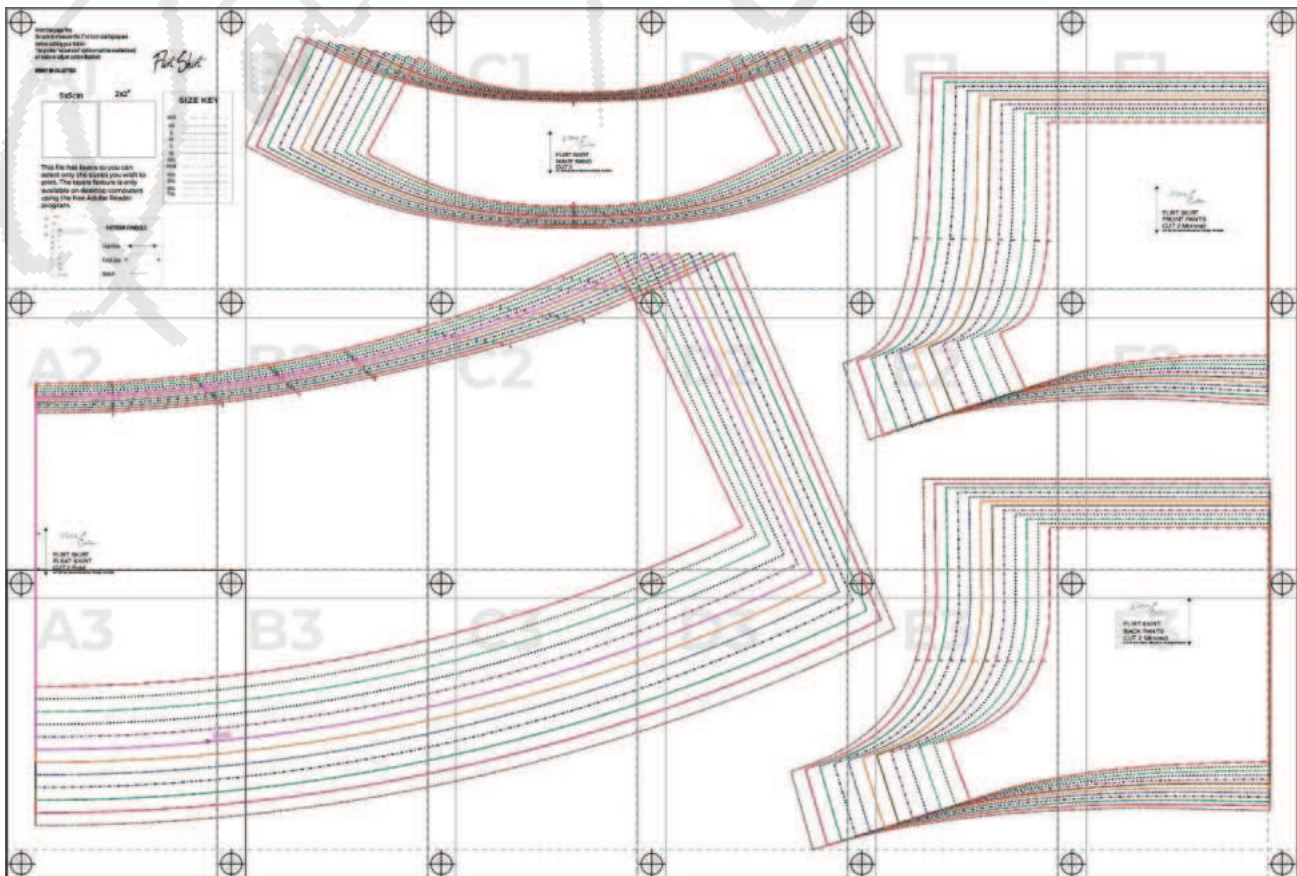

Fabric Cutting Instructions

Pattern Piece Name	Pieces to Cut
Pleat Skirt	Cut 2 on fold
Waistband	Cut 4
Front Pants	Cut 2 - mirrored
Back Pants	Cut 2 - mirrored

HOW TO CUT MIRRORED PIECES

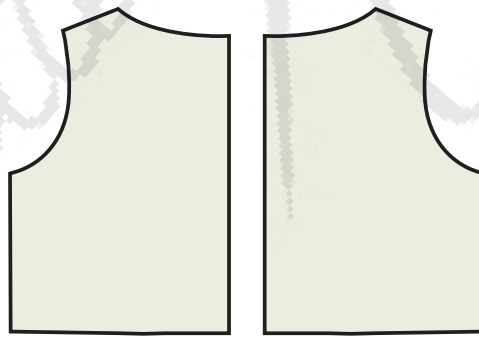

Mirrored pieces are pieces of the same shape , but cut in opposit directions, so as to be symmetrical mirror images of each other.


The fastest way to cut mirror images is to fold your fabric RIGHT sides together and cut the piece out, cutting through both layers of fabric at the same time.

Fabric Layout

Sample cutting chart shown below.

Depending on what options you choose, it may be laid out differently.

MAIN FABRIC

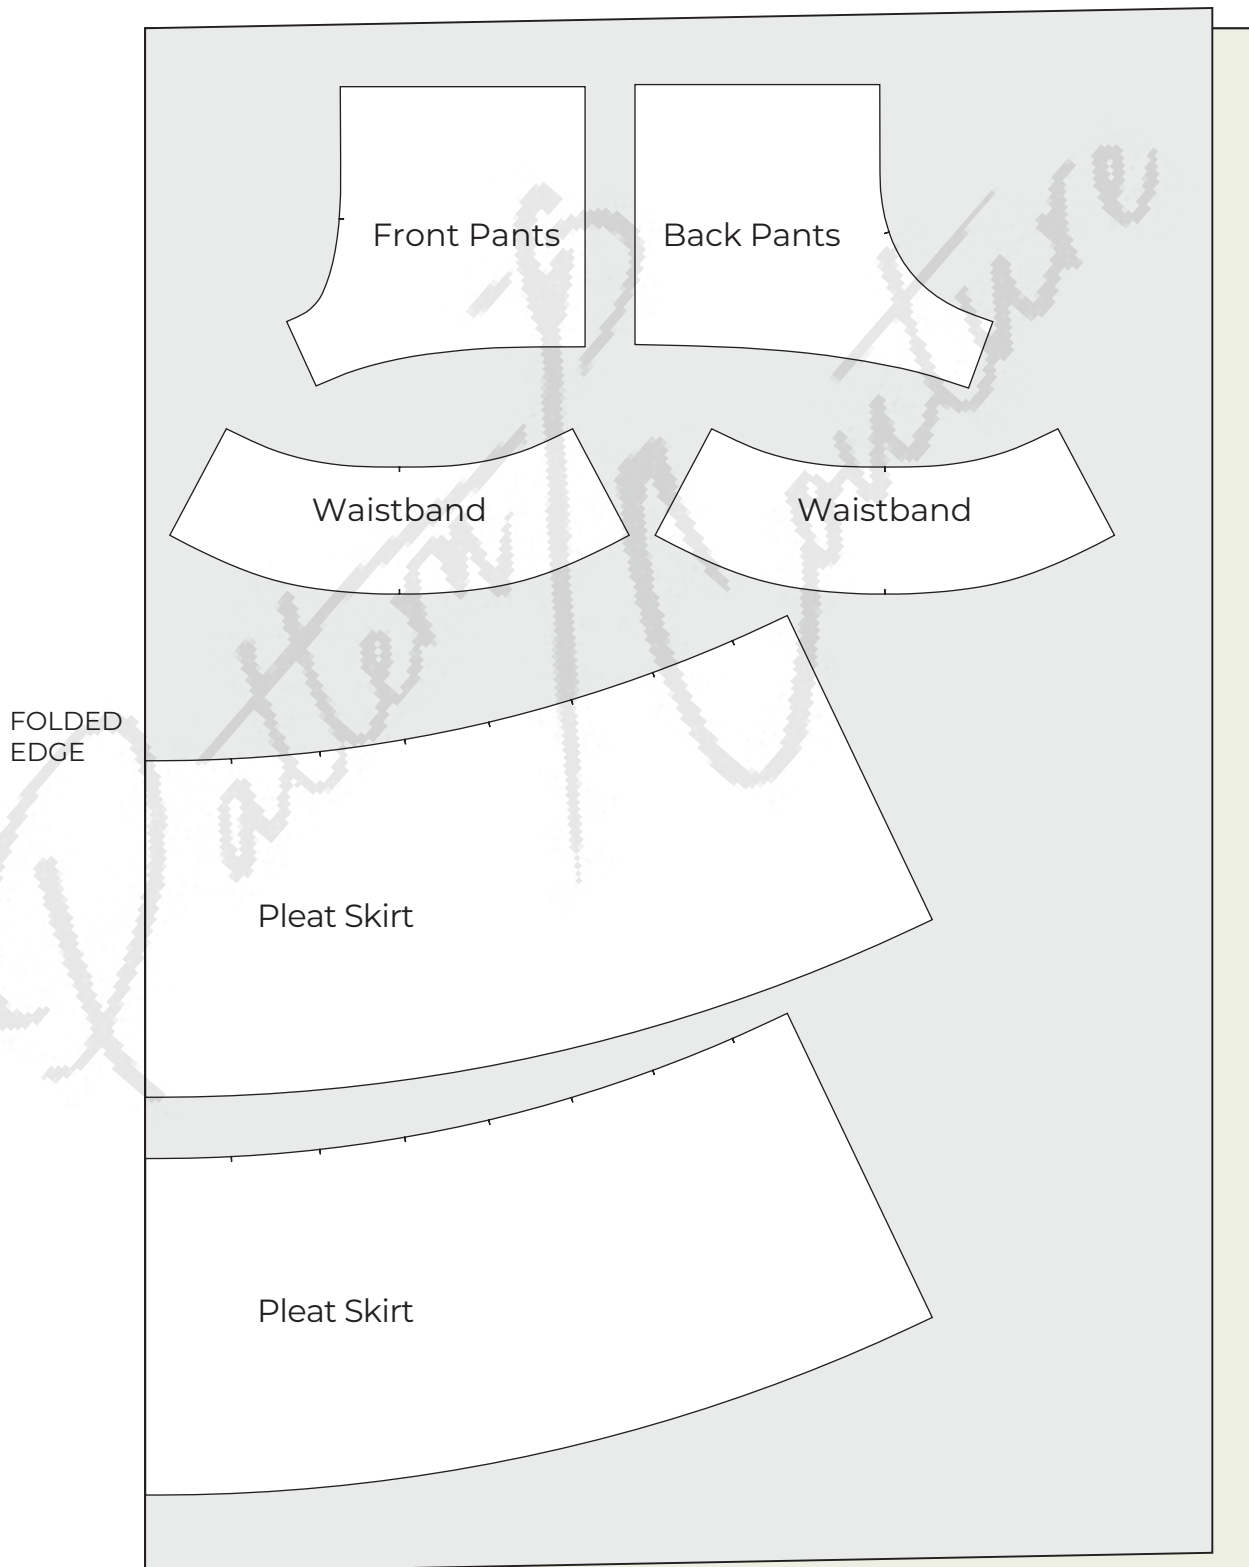

Tips and Tricks when sewing with stretch fabrics

Choose the Right Needle:

Use a ballpoint or stretch needle specifically designed for knit fabrics. These needles have a rounded tip that helps prevent snags and runs in the fabric.

Use the Right Stitch:

Use a stretch stitch like a narrow zigzag stitch, a lightning bolt stitch, or a triple stretch stitch on your sewing machine. These stitches allow the fabric to stretch without breaking the threads. Set your stitch length to the smallest zigzag setting (usually a 0.5) and your stitch length to a 3. Do not stretch the fabric as you sew.

If your machine only has a straight stitch, set your stitch length to a medium (usually a 3) setting. You will need to stretch the fabric SLIGHTLY and gently as it goes under the machine foot.

Use a Walking Foot:

If you have one, a walking foot can help feed both layers of fabric evenly through the machine, reducing the chances of puckering or stretching.

Finish Raw Edges:

Since most knits do not ravel, finishing exposed seams is optional. However you can use a serger if you have one to finish raw edges or a zigzag stitch on your machine.

Fabric Choice:

Not all stretch fabrics are the same. Some are more stable, while others are very stretchy. Choose a fabric that matches the project's requirements ..

Press Carefully:

Use a low heat setting and a pressing cloth when ironing stretch fabrics. Avoid pressing too hard, as excessive heat and pressure can damage the fabric's elasticity.

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



We suggest reading the entire instruction before you begin.

PREPARATION STEPS :

- Mark notches and transfer all pattern markings

Step 1 : SEWING THE WAISTBAND

- Put 2 waistbands with right sides together, aligning the side seams and sew at 0.7cm (1/4").


Finish the seam allowance with zigzag.

- Do same with the 2 remaining waistband pieces.

- Turn one waistband right sides out. Put them with right sides together, aligning the notches at the top edges at (the shorter curves) and side seams .

Make a topstitch by using zigzag stitch.

To avoid sewing through thick fabric, position the side seam allowances opposite each other.

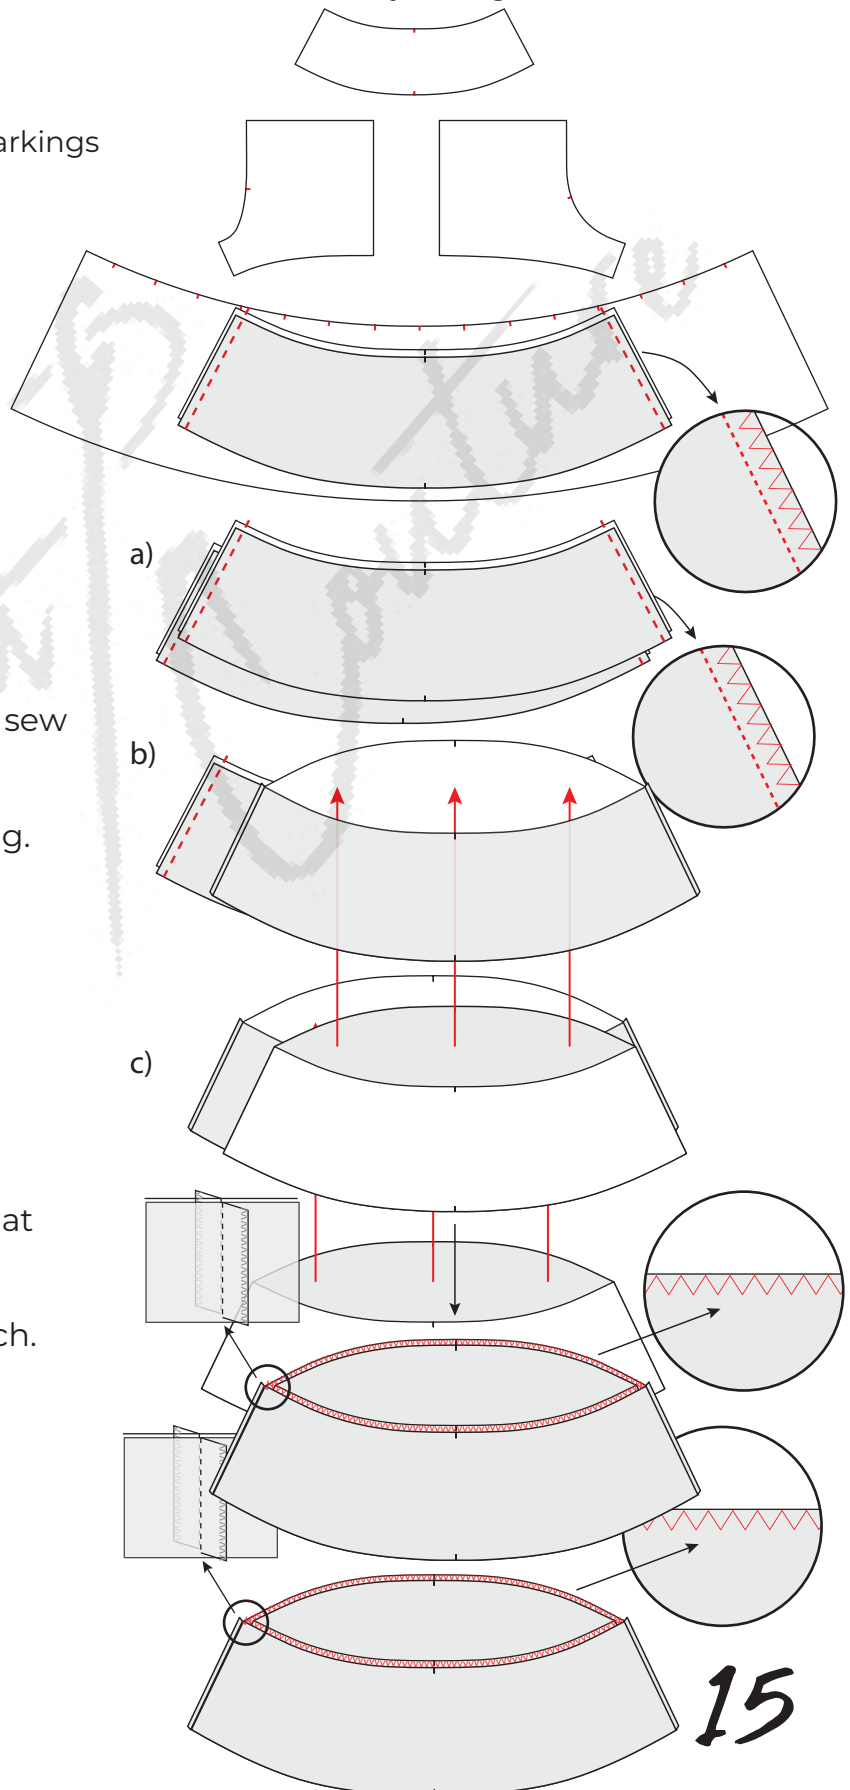

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side



Current Stitch Line

d) Turn the waistband right side out and align the bottom curves. Then, make a basting stitch (using the longest stitch setting) to connect the two bottom edges of the waistband together, which will help prevent the fabric from stretching.

Step 2 : SEWING THE PANTS


a) Put 1 front pant & back pant leg with right side together, aligning side seam & sew at 0.7cm (1/4").

Finish the seam allowance with zigzag.

b) Align the inseams together and sew at 0.7 cm (1/4").

- Finish the seam allowance with zigzag. Press the side seam and inseam towards the back pant.

c) Repeat for the other front and back pant legs.

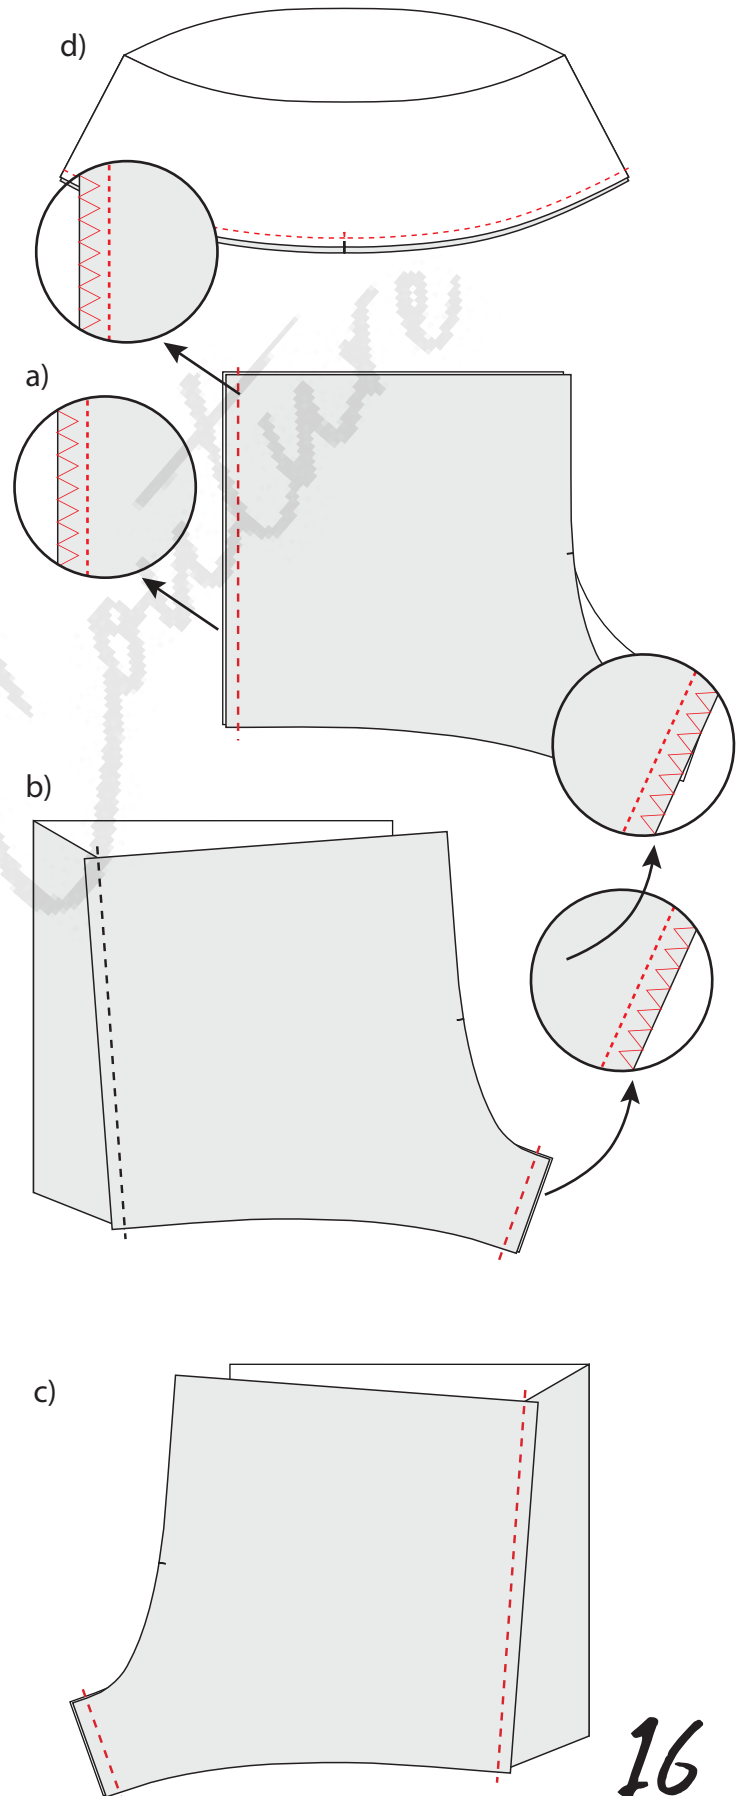

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side



Current Stitch Line

d) Sew the center ("crotch") seams:

Keep one leg inside out, and turn the other leg right side out.

Place one leg inside the other right sides together aligning the notches .

Match the crotch seams so that the right sides of the fabric are facing each other.


Align the front crotch, back crotch, and inseam points carefully. Pin in place.
Sew at 0.7cm (1/4").

Finish the seam allowance with zigzag.


e) Use zigzag stitch for the hem of pants

f) Optional - Attach a clothing tag or a small scrap of ribbon to the back of the shorts, making it easy to distinguish the front from the back when worn.

d)

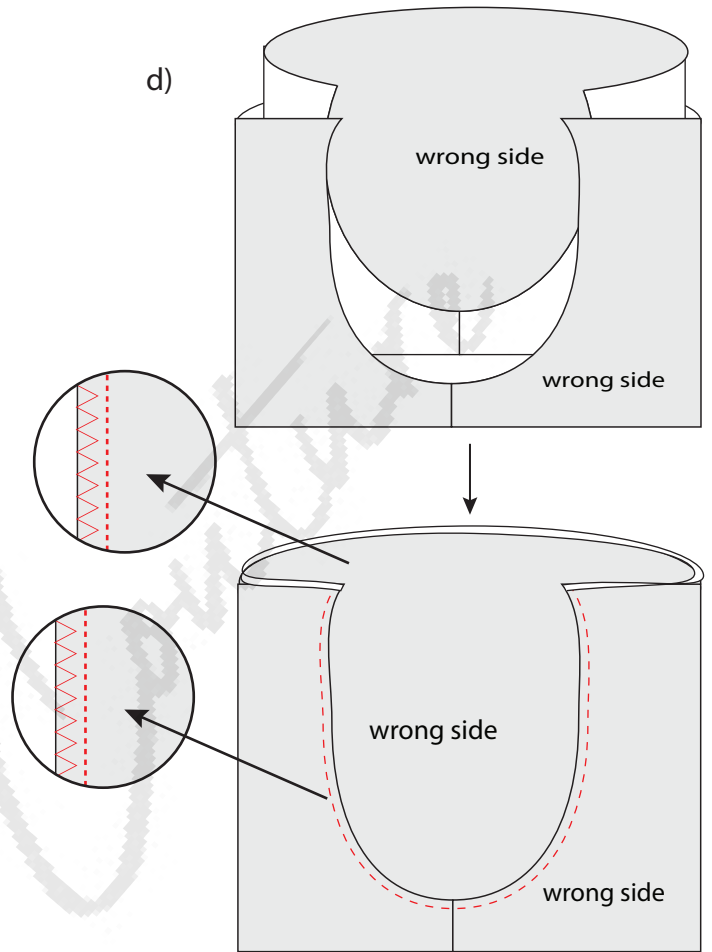

e)

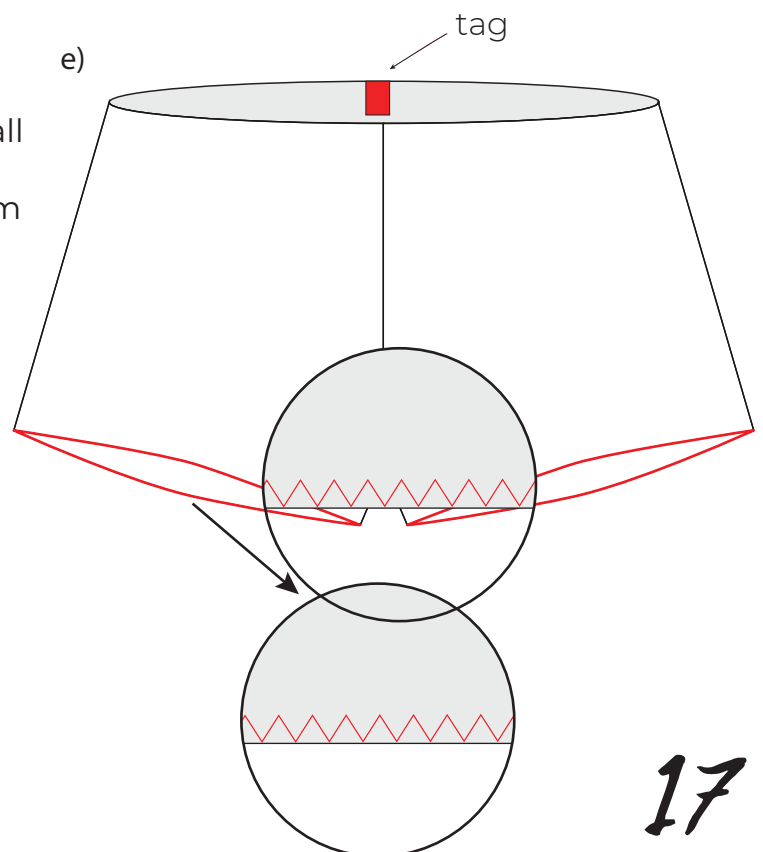


Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated




Step 3 : SEWING THE PLEAT SKIRT

a) Fold the pleat skirt in half and mark 1 notch at the corner of the top curve that has notches.

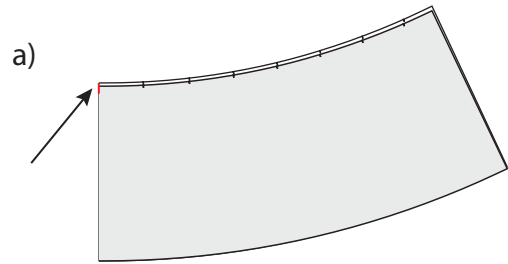


Do same with remaining skirt piece.

b) You'll be creating 5 Inverted Box pleats on the skirt, with each pleat using 3 adjacent notches. The center notch of each set of 3 will serve as the placement line for the pleat.

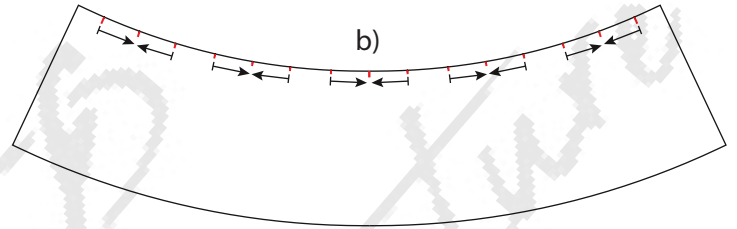



c) Fold the fabric at the center, bringing the two opposite notches together, and sew a basting stitch perpendicular to the fold, about 2cm (3/4") from the top edge. Do same with 4 remaining pleats.

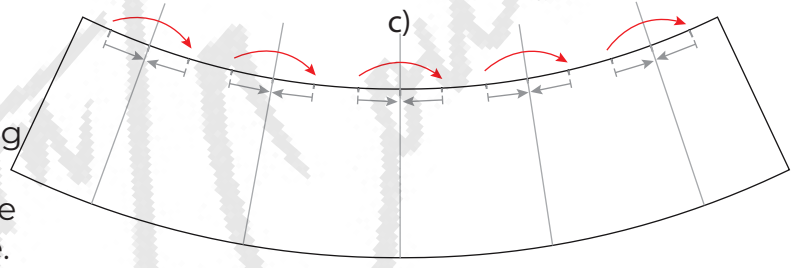

We found a video on Youtube to help you make the pleat :Copy and paste link into Youtube or search for Sewing tutorial - Inverted Box Pleat by Pysselnabon


<https://www.youtube.com/watch?v=kOK01DeReoM>

d) Align the center notches and seams at the 2 side notches of each pleat. Then, sew a basting stitch at 3/8" (1cm) through the pleat width to secure the pleat in place. This stitch will be removed after the garment is finished.

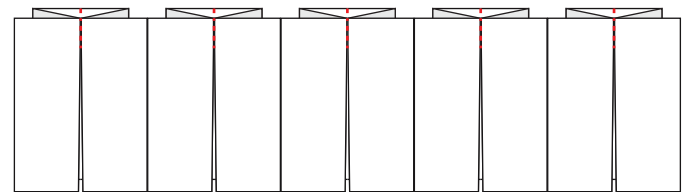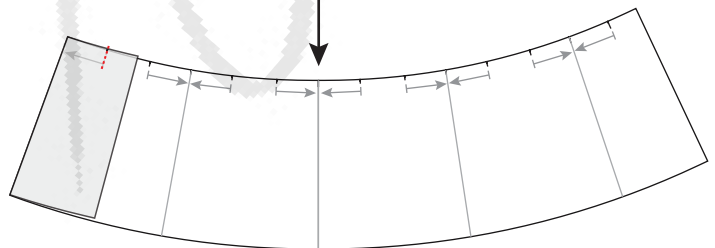

Right side

d)

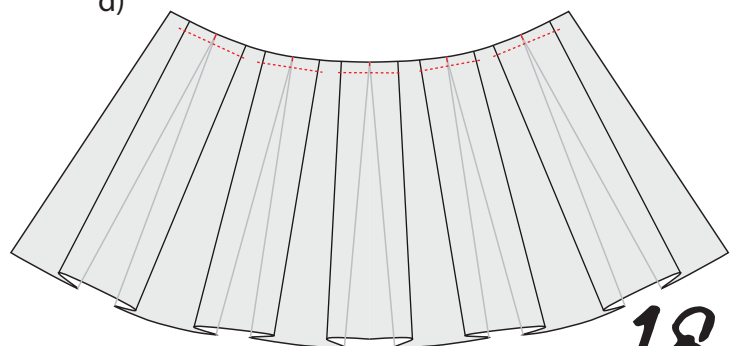

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated




Fabric Right Side



Fabric Wrong Side

Current Stitch Line

e) Do same with other skirt.

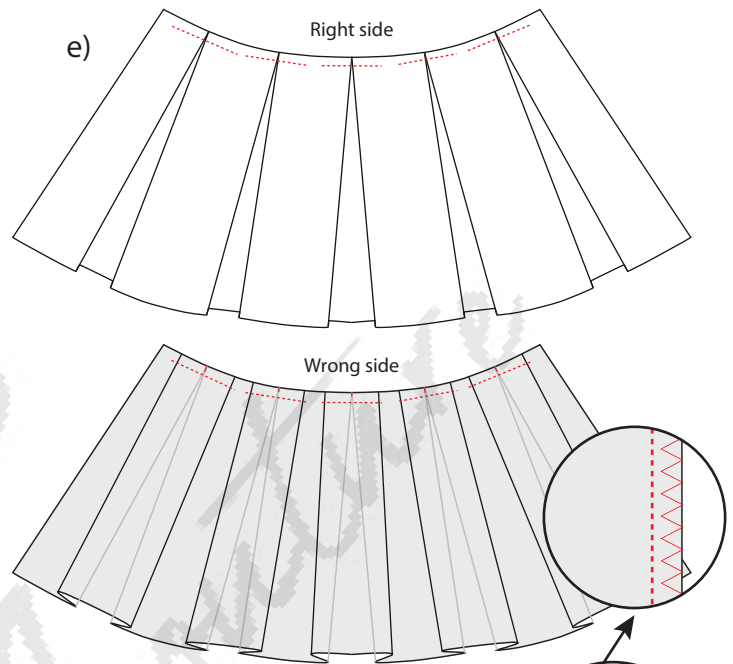


f) Put the front and back skirts with right sides together, aligning side seam and sew at 0.7cm (1/4").

Finish the seam allowance with zigzag.

- Do same with remaining side.


- Press seams towards one side of the skirt.

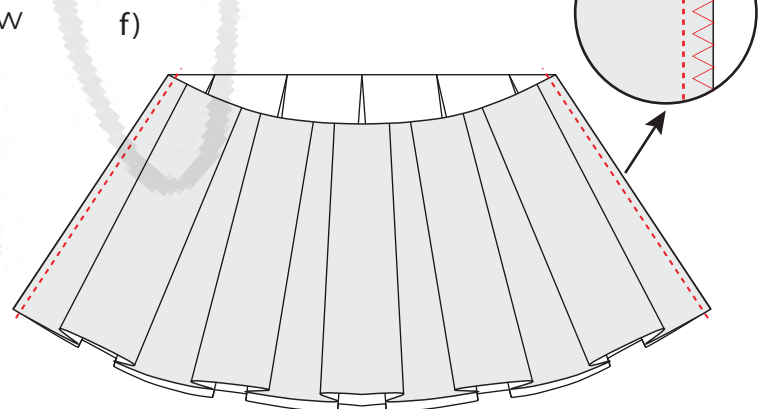

Step 4: SEWING WAISTBAND TO PANTS AND SKIRT

a1) Place the pants inside the waistband with right sides together, aligning the pants' centre front and back seams (crotch seams) with the 2 notches on the waistband's bottom edge (the one with the basting stitch).

a2) Also match the waistband and shorts side seams. Pin in place.

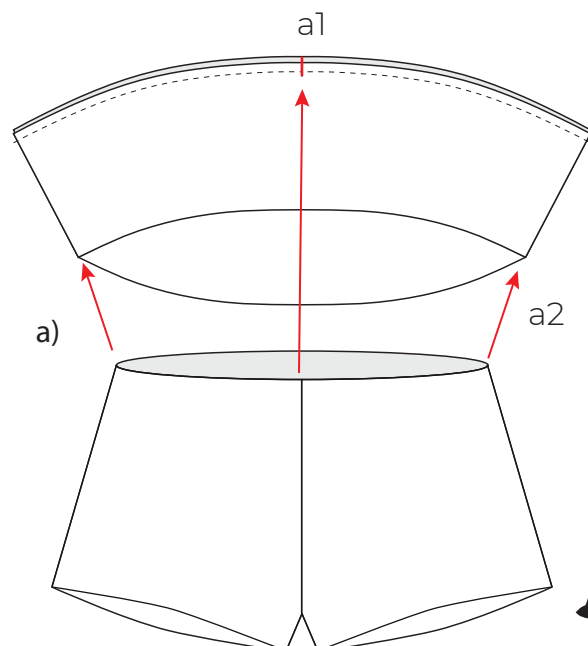

Sewing Instructions

Note:
Seam allowance is 3/8" (1cm) unless otherwise stated




Fabric Right Side



Fabric Wrong Side




Current Stitch Line

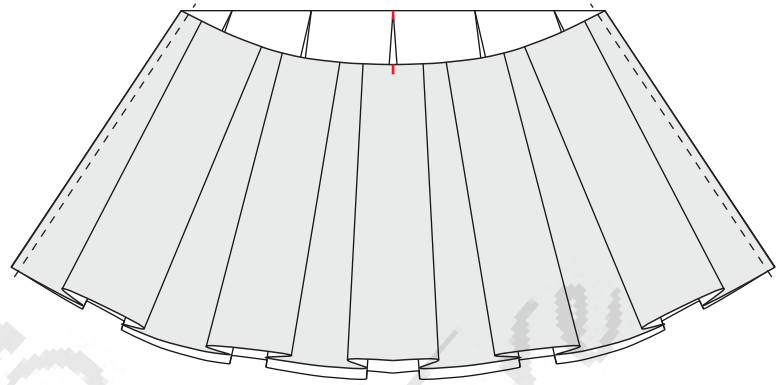


b) With the skirt wrong side out, place it over the shorts with right sides together (skirt's right side will be against the shorts' right side, and the wrong side of the skirt will be against the right side of the waistband).

Align the side seams, and match the center notch of each skirt's center pleat to the notches on the waistband.

To avoid sewing through thick fabric, position the allowances of the pants and skirt at the side seam opposite each other.

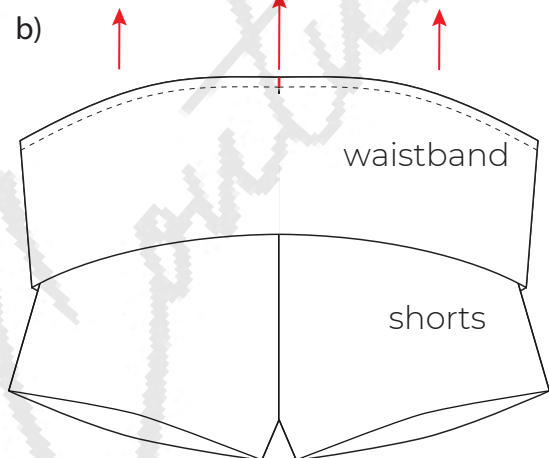


c) Sew at 1cm (3/8") using a basting stitch (longest stitch) to secure the layers together, preventing stretching.

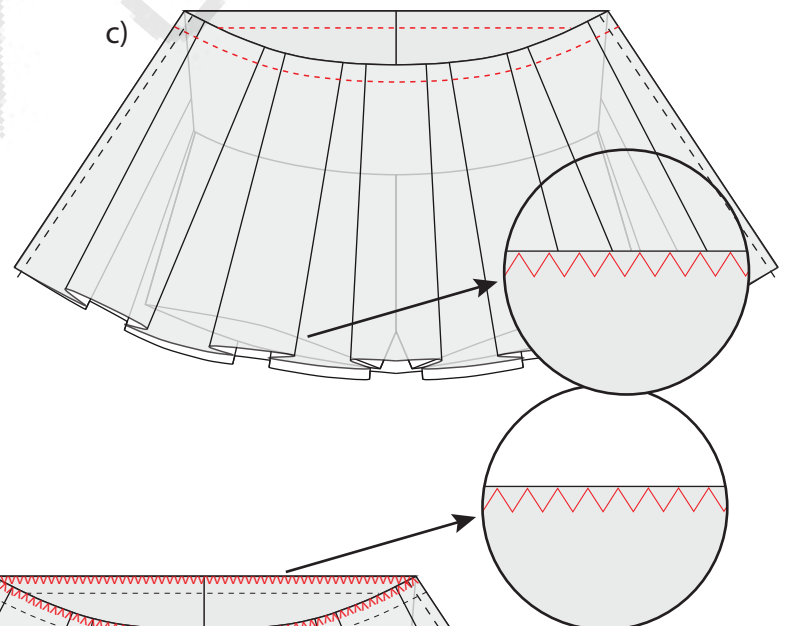

d) Topstitch using a zigzag stitch, wrapping the stitch over the raw edges of all fabric layers to enclose them.

Remove all basting stitches.

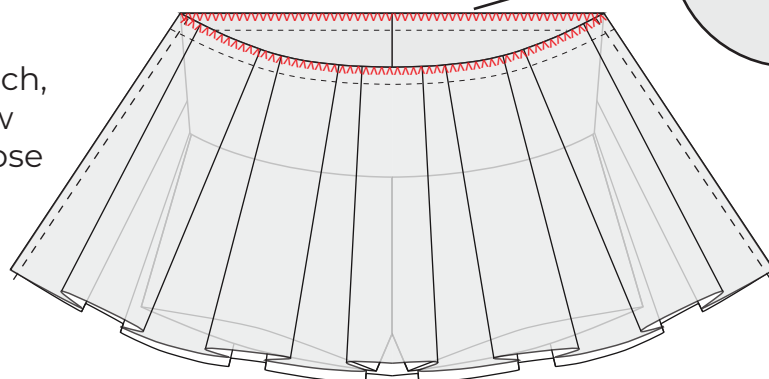

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side

Current Stitch Line


Step 5 : SEWING THE SKIRT HEM

- Fold the hem of skirt to the wrong side at 2.5cm (1").


- Starting at one side seam of the skirt, make a topstitch using a zigzag stitch, continuing around the hem, and stopping at the other side seam. Backstitch at the beginning and end of the seam to secure it

- Press the skirt.

The front look and back look is same, so if you did not add a clothing tag - you can tell the difference between the two because the center front crotch curve is shorter, while the center back crotch curve is longer.

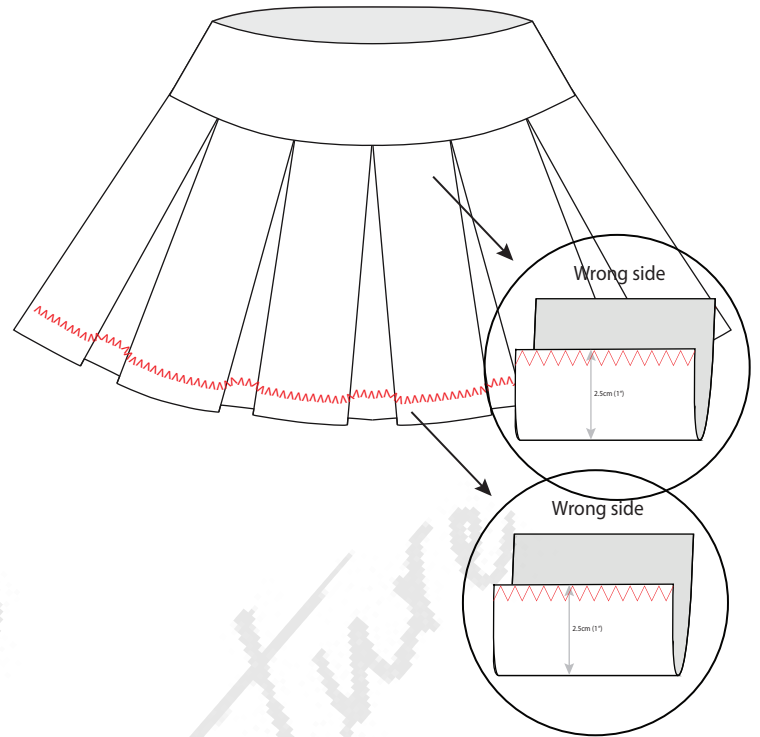

- Your Flirt Skirt is ready!

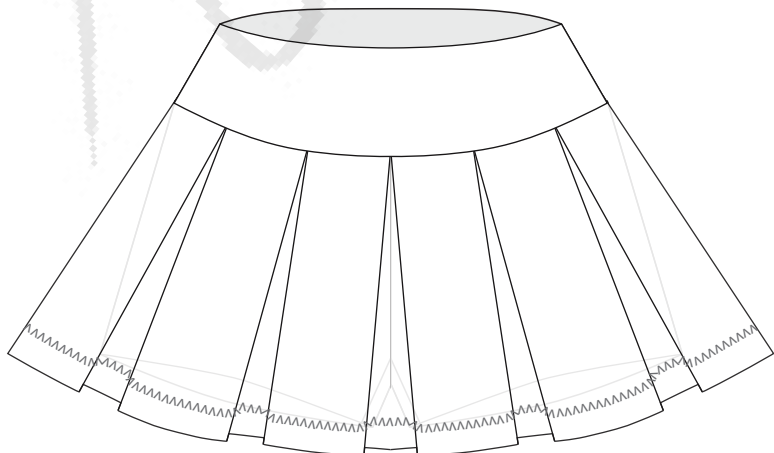

Final Looks

We hope you have had a lot of fun with this pattern. Do not forget to share your finished result on Instagram at

@patterncouture_

for a chance to win a free sewing pattern.

