

Hally Top



ILLUSTRATED TUTORIAL

*Pattern
Couture*

INTERMEDIATE



SIZES: XXS - XXXL

Thank you so much for choosing our pattern!

Our goal is to make beautiful patterns that all our clients will enjoy sewing and also feel very proud wearing!

Happy Sewing !

If you ever need any help or if you have any questions you can always write to us on Etsy or on our e-mail address **help.patterns@gmail.com**

We wish you a wonderful day and a lot of fun with your sewing project.

Do not forget to share your finished result on Instagram (P.S. add us **@patterncouture_** for a chance to win a free sewing pattern.

XO Katya & Tobias

Table of Contents


Page Number	Table of Contents
1	Welcome and Contact Information
2	Table of Contents
3	About the Pattern / Sewing Supplies List
4	How to take body Measurements
5	Choosing your Size / Size Chart
6	Fabric Requirements
6	Recommended Fabrics
7	Printing Instructions
8	Pattern Assembly with Video Instructions
9	Pattern layout
10	Fabric Cutting Instructions
11	Fabric Layout
12	Sewing Tips and Tricks
13 - 16	Sewing Instructions
17	Final Looks

ABOUT THE PATTERN

Meet the Hally Top.

A halter neck style top with elastic in the waist and ties around your neck.

This pattern comes in sizes XXS-XXXL.

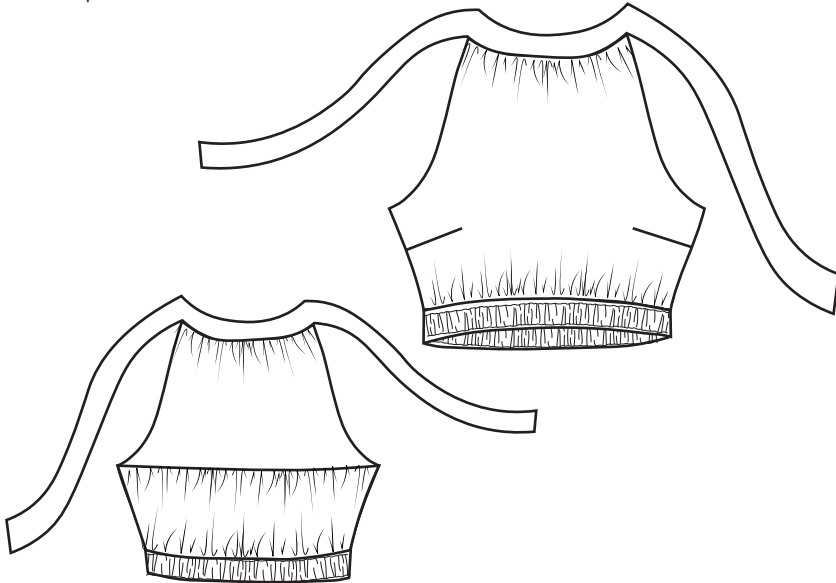

Sewing Supplies Checklist

sewing Machine
-measuring tape
-scissors
-pins or clips
-coordinating thread
-fabric marker
-seam ripper
safety pin or bodkin.


Notions:

-Elastic 4cm(1 1/2") width , length - 75cm(7/8 yard)
-Elastic width 1cm(3/8") length 22cm (9")

Optional:

A serger or coverstitch machine is not required but always fun to use if available.



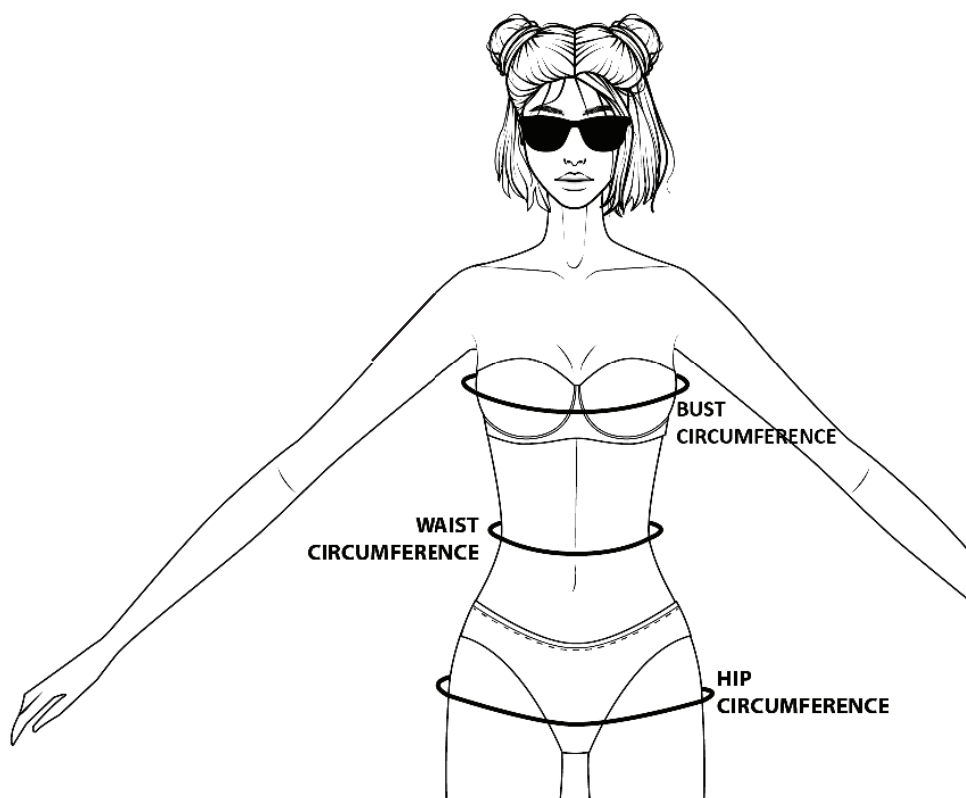

In order to pick the right size, you need to compare your measurements with the measurements from the size guide.

For top garments (dress, blazer, coats, tops..) base your size decision according to the bust circumference.

For bottom garments (skirts, pants, shorts...) base your size decision to the hip circumference.

If your measurement fall between two sizes, you should pick the size which your measurement comes closest to.
For example if your bust size is 79cm or 31" choose XXS.
If you fall exactly into the middle (+/-2) go to higher size for close fitting garments and to the smaller size for loose fitting garments.

IMPORTANT! In case you fall into one size according to your B measurement (for example 36) and a different size according to your W and H measurements (for example 40), then you'll have to adjust the pattern at the waist and hip lines.

Choosing Your Size

ATTENTION!

Our brand uses **different size charts** for different patterns.

Make sure to **check your size** for each project. Also do not rely on the ready to wear garment size you buy in shops.

How to measure your size:

The best thing you can do is, to get a friend or a family member to help you.

The measurements should be taken in the same Underwear / undergarments in which you will wear the garment.



Size Chart

The following 3 measurements we need: **Bust, Waist and Hip**. The measurements of the Bust and the Hip should be taken in the most protruding part of the body. The measurement tape should be taut but it shouldn't deform your body. If you can still put a finger between the measurements tape you are good.

This pattern is drafted for an women with 170cm (5'5") height


SIZE /CM	XXS	XS	S	M	L	XL	XXL	XXXL
BUST	78	82	86	90	94	98	102	106
WAIST	60	64	68	72	76	80	84	88
HIP	90	94	98	102	106	110	114	118

SIZE / INCHES	XXS	XS	S	M	L	XL	XXL	XXXL
BUST	30.7	32.3	33.9	35.4	37	38.6	40.2	41.7
WAIST	23.6	25.2	26.8	28.3	29.9	31.5	33.1	34.6
HIP	35.4	37	38.6	40.2	41.7	43.3	44.9	46.5

Recommended Fabrics

This pattern is best suited for non stretch medium to lightweight fabric:

Silk chiffon
Cotton lawn
Rayon challis
Polyester crepe
Georgette
Poplin
Cotton
Jacquard

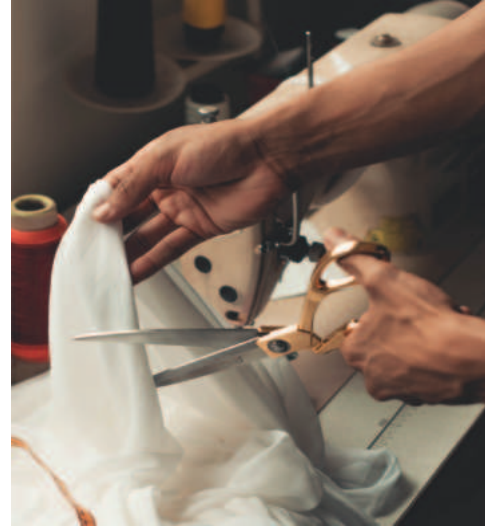

Fabric Requirements

Amount of Fabric Required (Main)		For all sizes
150 cm wide fabric	amount in metre(s)	0.9
60 " wide fabric	amount in yard(s)	1

Amount of Fabric Required (Lining)		For all sizes
150 cm wide fabric	amount in metre(s)	0.5
60 " wide fabric	amount in yard(s)	5/8

Printing Instructions



Let us print out the pattern.
There are 3 options on how to print the pattern:

A4 and US Letter size - these are tiled versions which you can print out at home on your desktop computer.

AO size - You can go to a copy shop and print it on a big scale. The nice thing is it is one sheet of paper and saves you the time of sticking pages together.

PRINTING CHECKLIST !


- Select your layers
- Enter print pages
- Orientation set to auto
- Set scale to 100%
- Print the Test Page
- Check your scale

Two test squares are provided to help ensure your pattern prints in the right size.

Depending on the test square you measured, it should be either 5cm x 5cm or 2" x 2".

If it has the wrong measurement, check your printer settings and try again.

NOTE : The pattern will not sew in the correct size if the Test Square does not measure correctly.

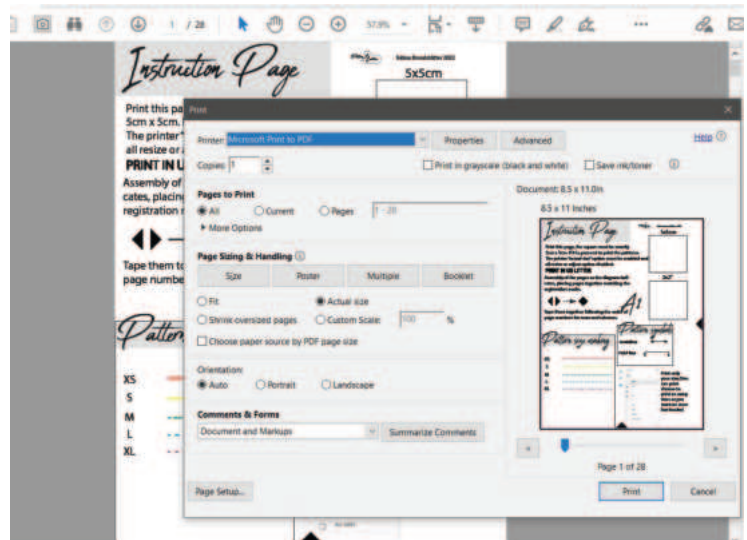

IMPORTANT:

Do not open or print the pattern in Microsoft Word.

In order to print this pattern you need the Adobe Acrobat Reader software. This software is available for free download on the internet.

<https://get.adobe.com/reader/>


Pattern Assembly

See the sample image below which shows how each sheet of paper will be placed.
Use the corner marks to align each paper next to each other.

Stick the sheets together using the number on the pages and the layout below as a guide.


PATTERN ASSEMBLY VIDEO LINK:

<https://youtu.be/cOW1K41QOBQ>

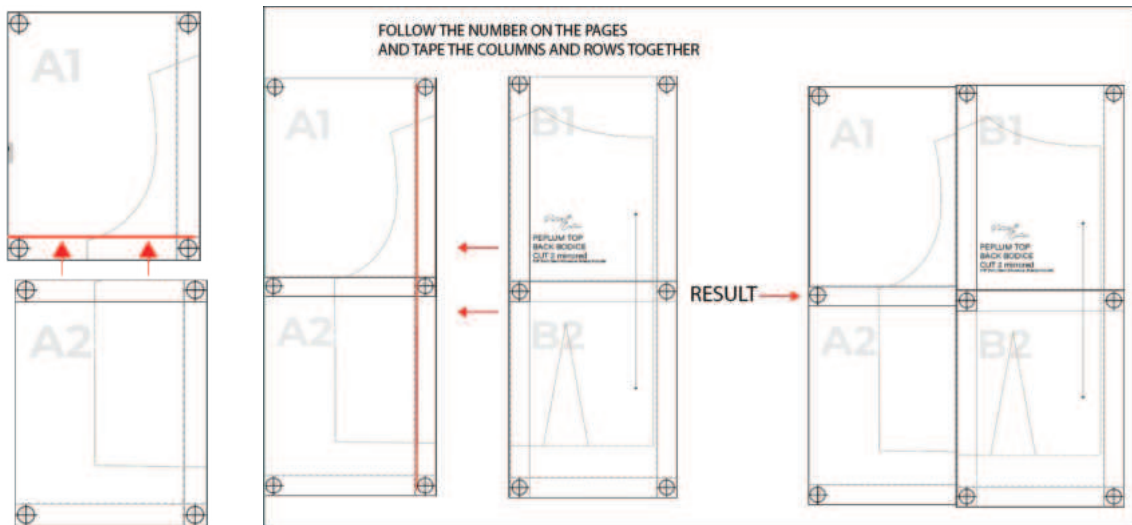


Pattern Layout

A4 LAYOUT

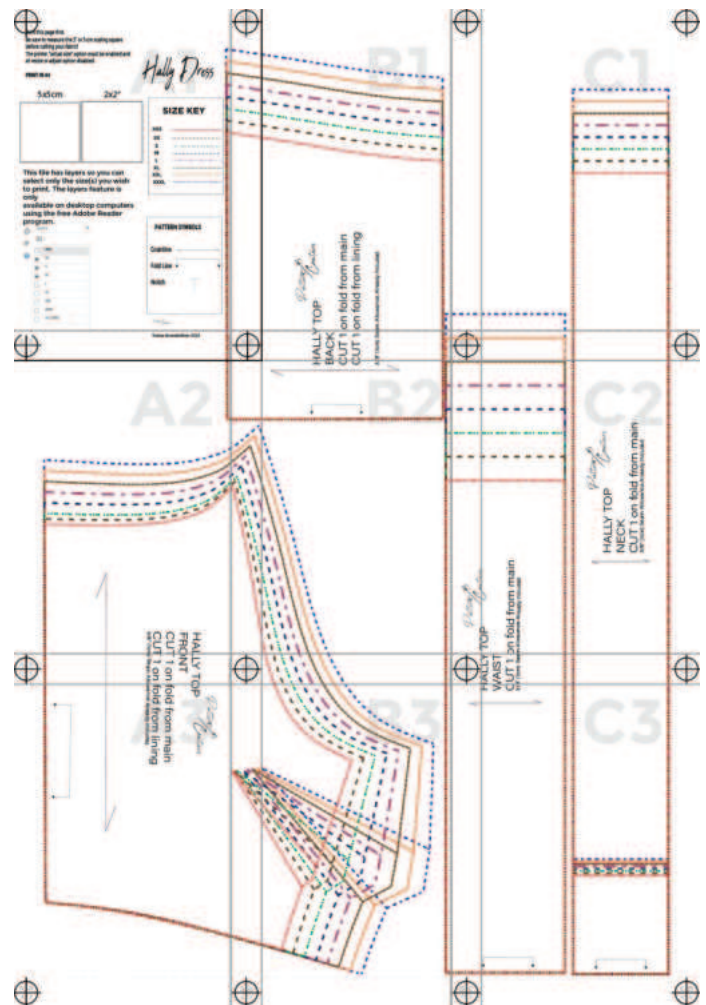


US LETTER LAYOUT

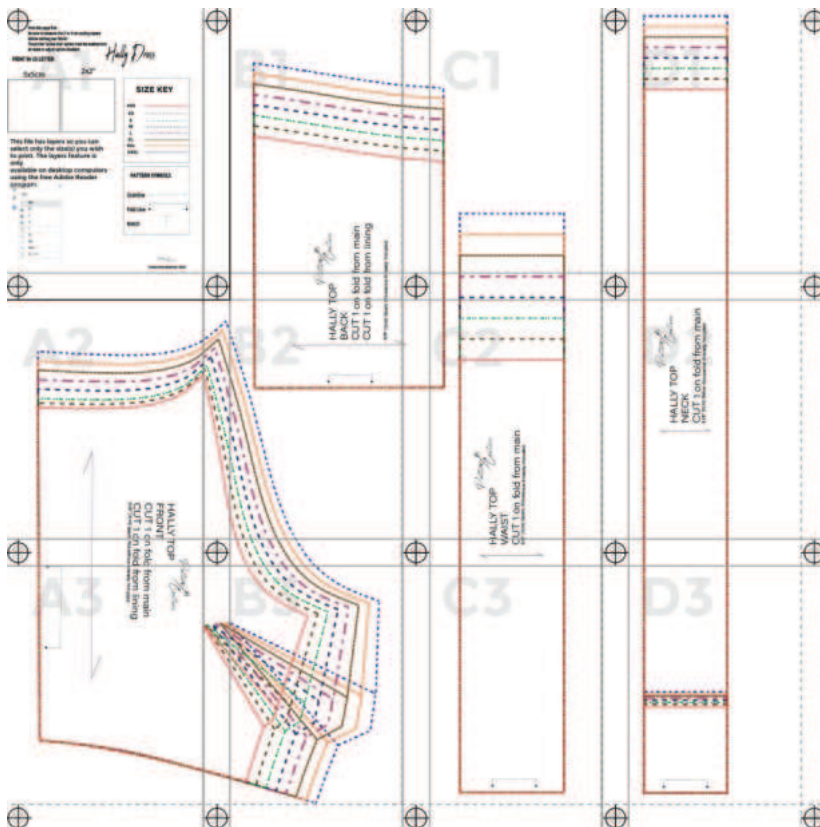

Fabric Cutting Instructions

Pattern Piece Name	Pieces to Cut
Front	Cut 2 - on fold- 1 main, 1 lining
Back	Cut 2 - on fold- 1 main, 1 lining
Waistband	Cut 1 - on fold- 1 main
Neck Tie	Cut 1 - on fold- 1 main



Mirrored pieces are pieces of the same exact shape, but cut in opposite directions, so as to be symmetrical mirror images of each other.


The fastest way to cut mirror images is to fold your fabric RIGHT sides together and cut the piece out, cutting through both layers of fabric.

Fabric Layout


Sample cutting chart shown below.

Depending on what options you choose, it may be laid out differently.

MAIN

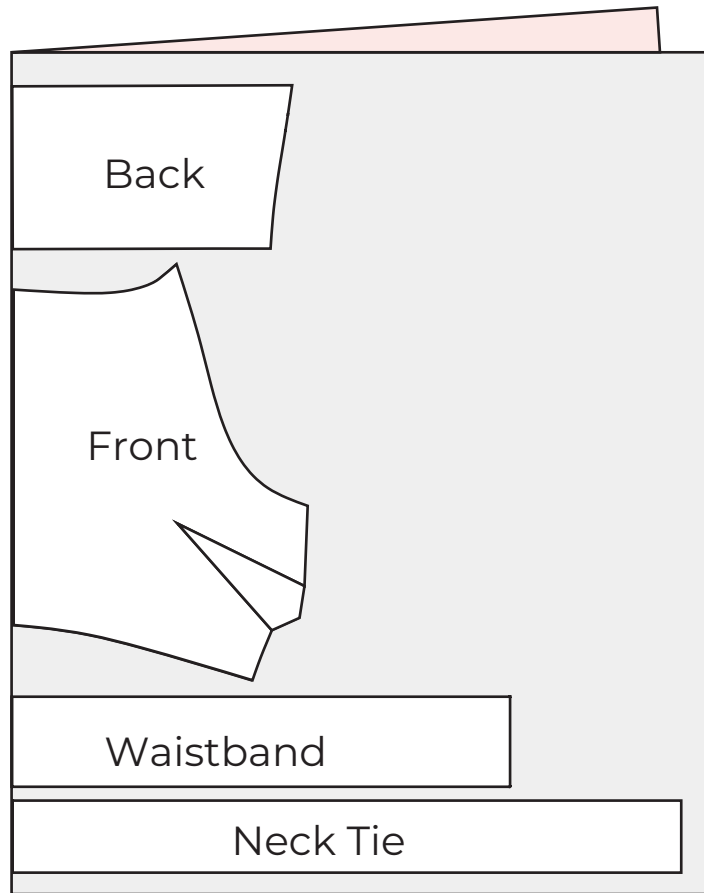

LINING

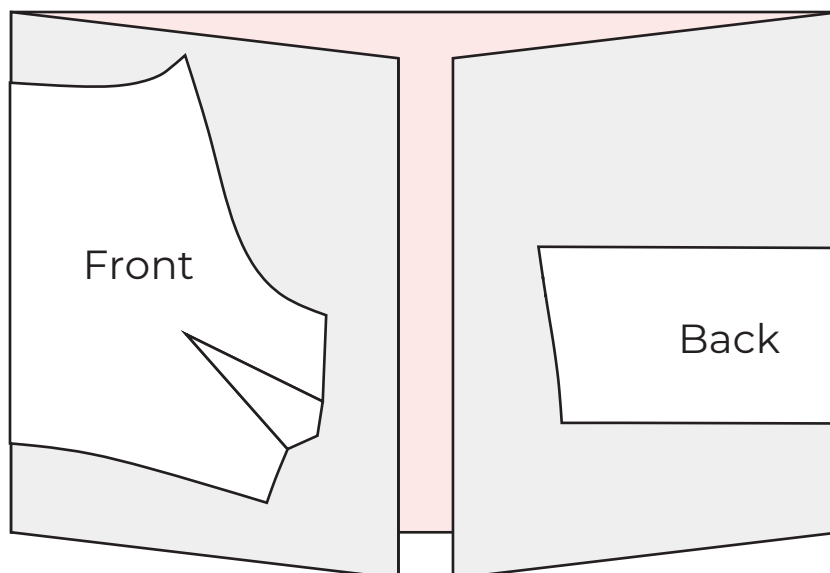

Tips and Tricks when sewing with woven (non stretch) fabrics

Choose the Right Needle:

Use a universal or sharp needle for most woven fabrics.

For heavyweight fabrics like denim or canvas, consider using a jeans/denim needle.

Select the Right Thread:

Choose a good quality, all-purpose polyester or cotton thread for most woven fabrics.

Match the thread color to your fabric for a more polished look.

Prewash Your Fabric:

Pre-wash your fabric to prevent shrinkage after your garment is completed.

This is especially important if your final garment will be washed.

Use the Right Stitch Length:

For most woven fabrics, a stitch length of 2.5 to 3.0 mm works well.

Adjust the length based on the weight of the fabric.

Finish Raw Edges:

Serge, zigzag, or use pinking shears to finish raw edges and prevent fraying.

Alternatively, you can use French seams for a neat finish on lightweight fabrics.

Press as You Go:

Press your seams as you sew. Use a hot iron and steam to set the stitches and create crisp seams.

Grainline Matters:

Pay attention to the grainline of your fabric. Cut pieces on the straight grain unless the pattern indicates otherwise.

Staystitch Curves:

Staystitching helps stabilize curves and prevents stretching.

Stitch along the seam line within the seam allowance.

Use Interfacing:

For areas that need extra stability, like collars and cuffs, use interfacing. It prevents these areas from becoming too limp.

Mark Your Fabric:

Use tailor's chalk, disappearing ink pens, or tailor's tacks to mark darts, notches, and other important points accurately.

Clip Curves and Notches:

Clip into seam allowances on curves to help the fabric lay flat. Make small notches at the seam allowance for easier alignment.

Test on Scrap Fabric:

Always test your stitches and settings on a scrap piece of fabric before sewing the actual garment.

Understand Fabric Properties:

Different fabrics behave differently. Understand the properties of the fabric you're working with, such as its drape, weight, and stretch.

Practice Precision:

Be precise with your cutting, marking, and sewing. Accurate measurements and cuts lead to a more professional-looking garment.

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side




Fabric Wrong Side

Highlight of current step

We suggest reading the entire instruction before you begin.

PREPARATION STEPS :


- Mark notches and transfer all pattern markings

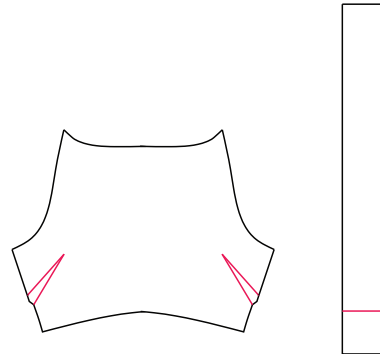

Step 1 : SEWING THE DARTS

Fold the fabric right sides together matching up the dart legs from the wide end to the tip.
Pin along the dart to keep the fabric stable, placing pins perpendicular to the sewing line. Start pinning from the wide end toward the point.
Begin sewing at the wide end of the dart, Sew along the marked line, gradually tapering down to the tip of the dart.
Avoid backstitching at the tip to prevent bulk; instead, leave a thread tail and knot it by hand for a smooth finish.

Press the dart towards the waist.


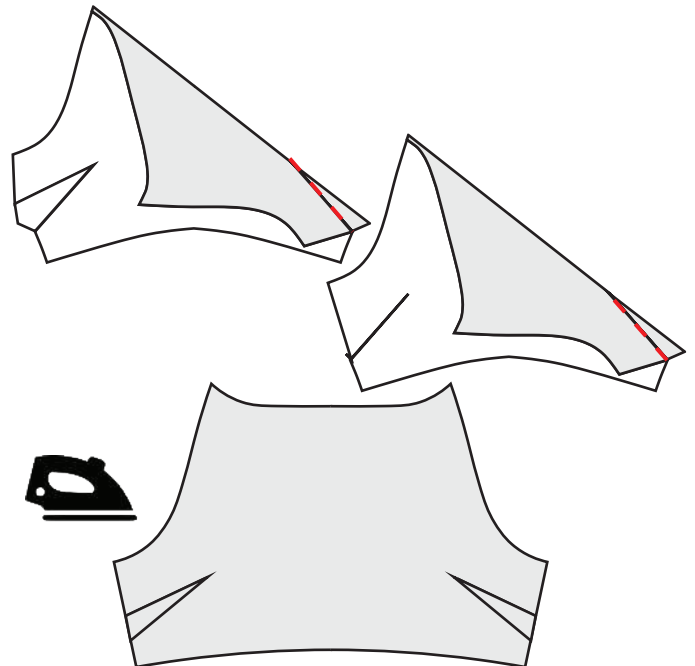


Step 2: MAKING THE TOP

a) With right sides together, pin and sew the Front main to the Back main from the sides.


b) Do a zigzag or overlock stitch to clean the seams.
This is now called the Top.

Repeat the same for the Front and Back Lining as well.

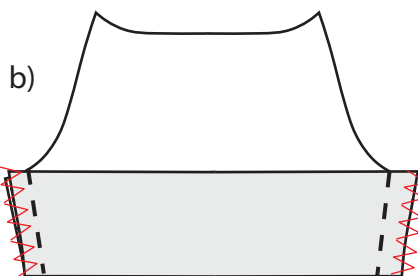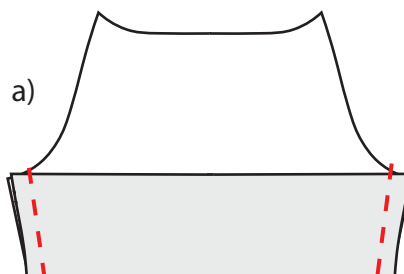

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



c) Place the Top Main and the Top Lining right sides together, aligning side seams. Pin at the armholes and back pieces . Sew along pinned areas.

d) Cut the 3/8" (1cm) wide elastic according to the chart below:

Size	XXS-XS	S-M	L-XL	XXL-XXXL
inches	6	7	8	9
cm	16	18	20	22

Pin the two short ends of the elastic to the back of the blouse while the blouse is still wrong sides out. The elastic is shorter than the blouse so you will need to stretch (see note**) the elastic as much as the Back length.

Set your sewing machine to a zigzag stitch and sew the elastic to the Back's seam allowance.



Step 3: FINISHING THE TOP

Turn the Top right side out and press.





Sew the Top main to the Top lining at the neckline and bottom (hem) raw edges.

Step 4: MAKING THE NECK TIES

- With right sides together, fold the Neck in half and sew up to the marked lines.
- Clip 1cm (3/8") at the line
- Turn the Neck right sides out and press.

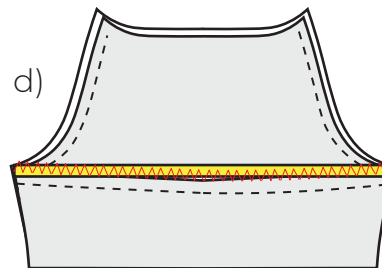
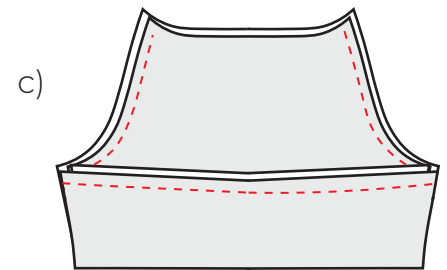


**Note : Not all elastics are created equal. Test your elastic's stretch. If inadequate, replace with high-quality elastic.

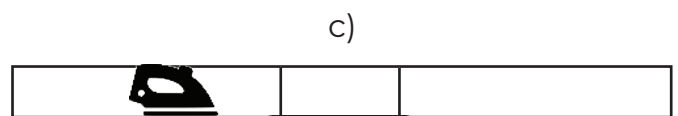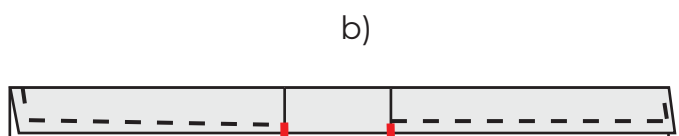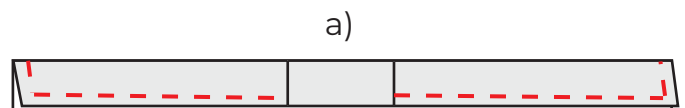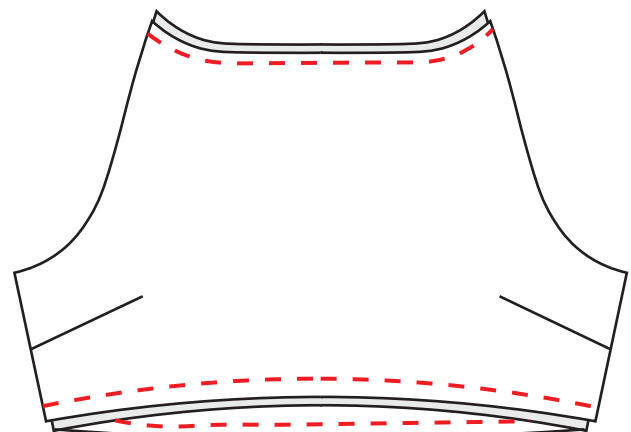

Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



a) On the Neck Tie piece, take out one of the seam allowance and keep one inside the fold.







b) Measure the unsewn area of the Neck Tie (marked A)

c) Set your sewing machine to the longest stitch. Sew a straight line along the Front Top neckline 0.5cm (1/4") from the edge. Leave long thread tails at both ends. Pull on the threads to gather the neckline until it is the same size as the measured area of the Neck Tie (marked A)

d) With right sides together, pin and seam allowance of the Neck Tie to the Front Neckline and sew them together.

e) Flip the neckline upwards and away from the Top so the opening in the Neck Tie piece is now to the wrong side of the blouse.


f) Insert the blouse seam allowance inside the unsewn area of the Neck. Topstitch the opening close 2mm (1/8") from the fold. Press the neckline.

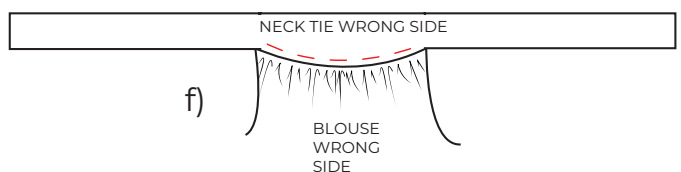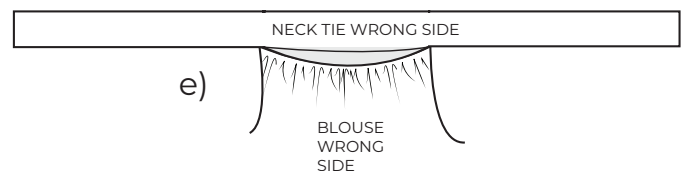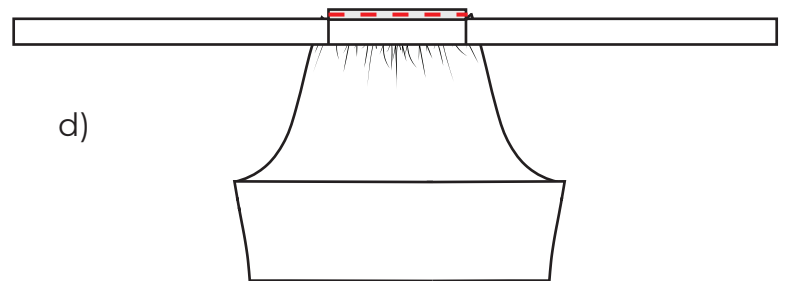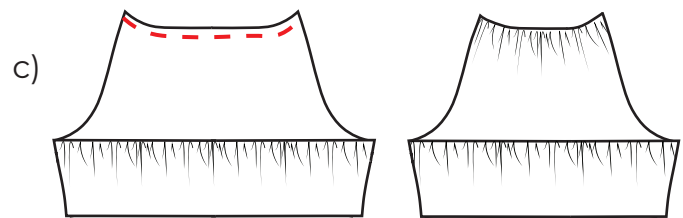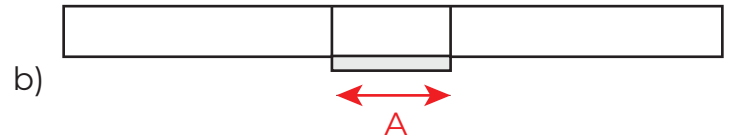

Step 5: MAKING THE WAISTBAND


a) With right sides together, fold the Waist pattern piece in half aligning and sewing the short ends.

b) With wrong sides together, fold the Waistband by the long edge 1cm (3/8") from the edge and press.

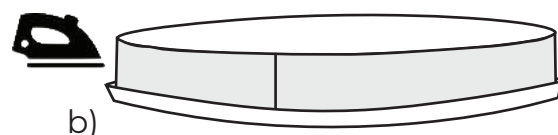


Sewing Instructions

Note :
Seam allowance is 3/8" (1cm) unless otherwise stated



c) With right sides together, pin the unironed edge of the waistband to the hem of the Top lining layer only. Sew.

d) With wrong sides together, fold the Waistband in half and bring it to the right side of the blouse. Pin the waistband to the Top main fabric, enclosing the raw edges. Topstitch the Waistband in place 2mm (1/8") away from the edge but leave about 4cm (1") unsewn for inserting the elastic.

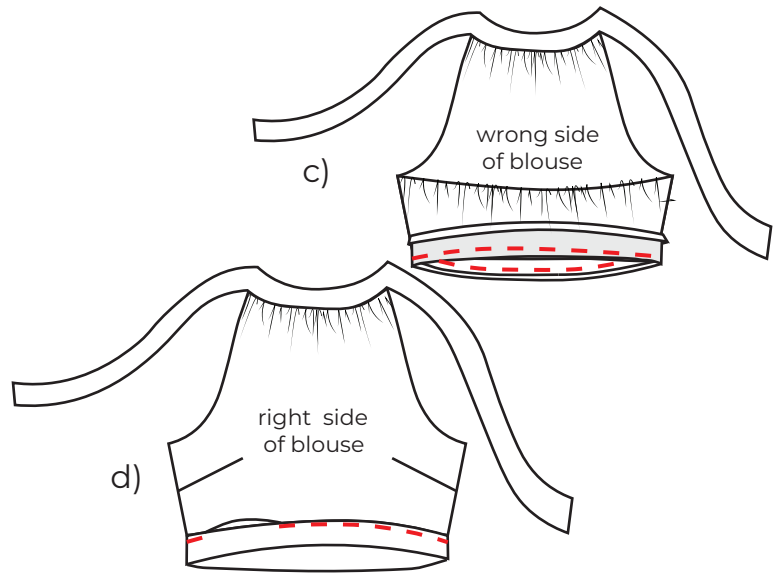


Size	XXS-XS	S-M	L-XL	XXL-XXXL
inches	21.5	23.5	25.5	27.5
cm	55	60	65	70

Step 6: ADDING THE ELASTIC

Cut the elastic according to the chart:


a) Insert the elastic inside the waist using a safety pin or bodkin, until the elastic reappears through the opening. Check that the elastic is not twisted

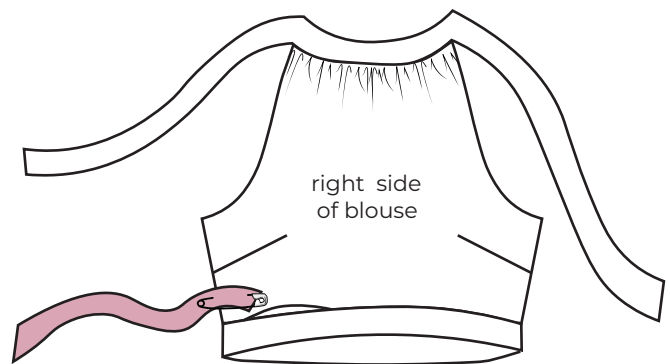

b) Sew the beginning and end of the elastic together.

c) Rearrange the elastic evenly inside the skirt waist. Topstitch the open area of the waist.

And its all done!
I hope you enjoyed it!

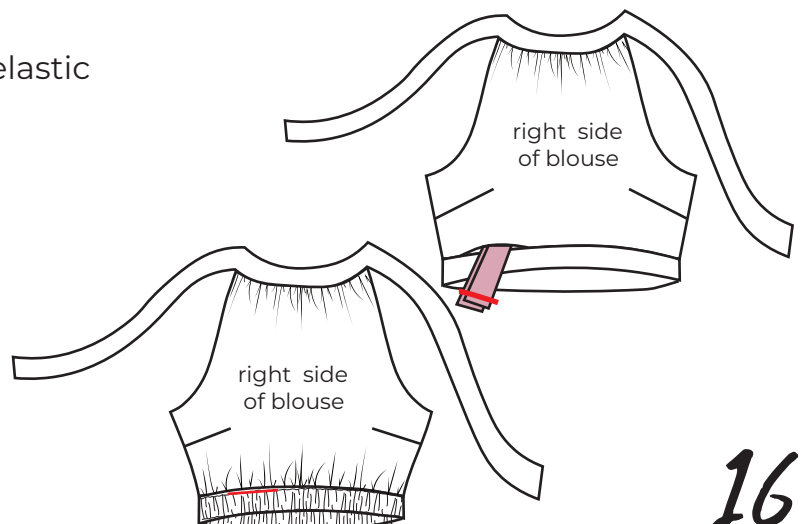

Final Looks

We hope you have had a lot of fun with this pattern. Do not forget to share your finished result on Instagram at [@patterncouture_](https://www.instagram.com/patterncouture_) for a chance to win a free sewing pattern.

