

Jessica Skirt



ILLUSTRATED TUTORIAL

SIZES: XXS - XXXL

ADVENTUROUS BEGINNER



Thank you so much for choosing our pattern!

Pattern Couture knows that there is something magical about choosing the perfect style , and creatively making your own clothes!

Our goal is to make beautiful patterns that all our clients will enjoy sewing and also feel very proud wearing!

Happy Sewing !

If you ever need any help or if you have any questions you can always write to us on Etsy or on our e-mail address **help.patterns@gmail.com**

We wish you a wonderful day and a lot of fun with your sewing project.

Do not forget to share your finished result on Instagram (P.S. add us **@patterncouture_** for a chance to win a free sewing pattern.

XO Katya & Tobias

Table of Contents


Page Number	Contents
1	Welcome !
2	Table of Contents
3	About the Pattern Sewing Supplies List
4	Taking Body Measurements
5	Size Chart and Choosing Your Size
6	Fabric Requirements Recommended Fabrics
7	How to Print your Pattern
8	Printing Layout / Pattern Assembly
9	Fabric Cutting Instructions Fabric Layout
10	Tips and tricks
11-15	Sewing Instructions
16	Final Look Photos Win a free pattern!

ABOUT THE PATTERN

Meet the Jessica Skirt.

This comfortable skirt can become one of the most worn items in your wardrobe. You can wear it with sneakers or high heels.

This pattern comes in sizes XXS-XXXL.

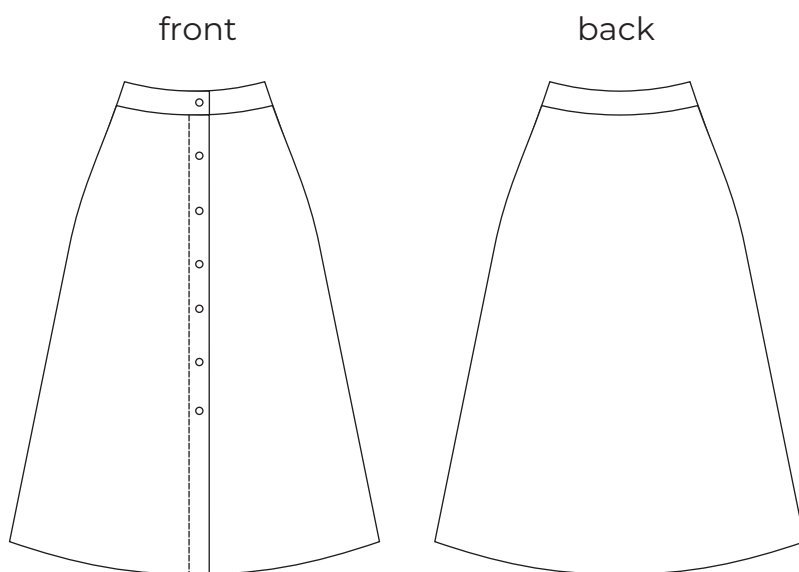

Sewing Supplies Checklist

Straight and Zigzag sewing Machine

- Measuring tape
- Scissors
- Pins or clips
- Coordinating thread
- Fabric marker
- Hand sewing needle
- Seam ripper


Notions:

- 0.3 metres (0.35 yards) of non-woven fusible interfacing
- 6 buttons in diameter of 2.5cm (1")

Optional:

- Serger, Buttonhole Making Machine



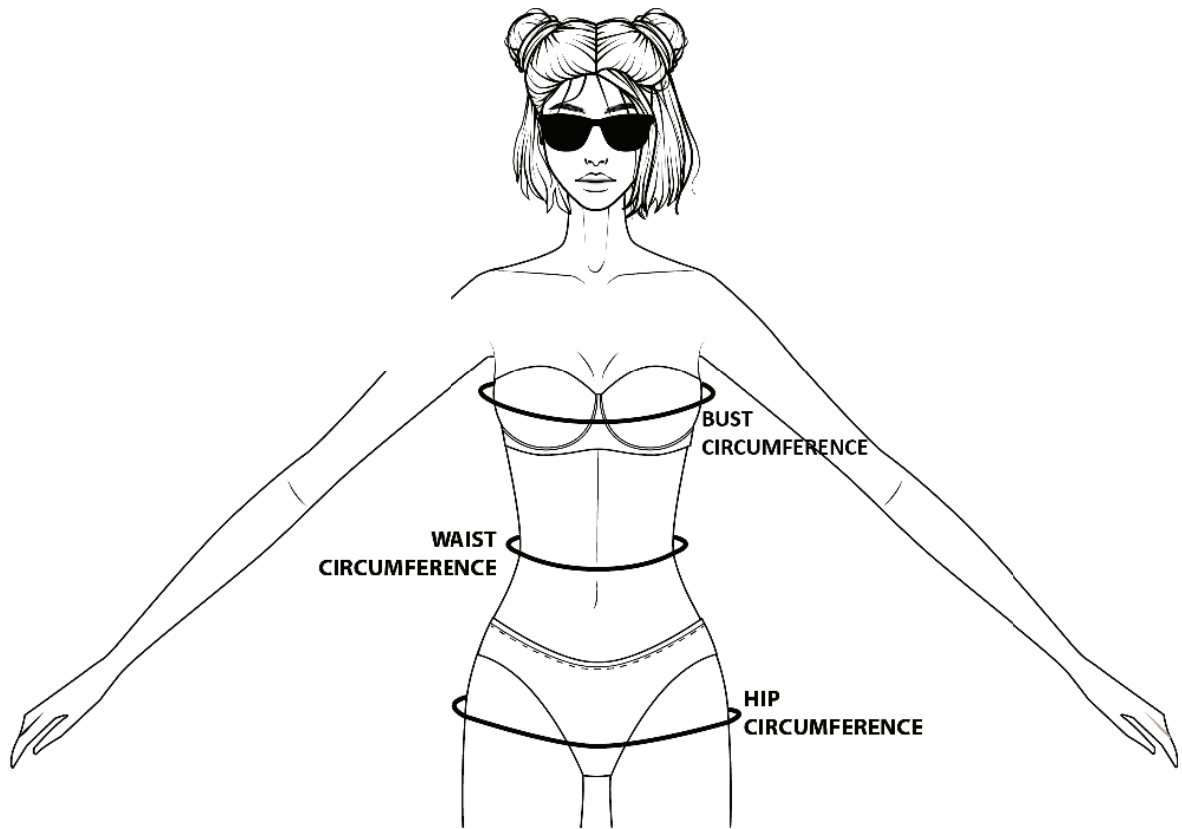

In order to pick the right size, you need to compare your measurements with the measurements from the size guide.

For top garments (dress, blazer, coats, tops..) base your size decision according to the bust circumference.

For bottom garments (skirts, pants, shorts...) base your size decision to the hip circumference.

If your measurement fall between two sizes, you should pick the size which your measurement comes closest to.

For example if your bust size is 79cm or 31" choose XXS.

If you fall exactly into the middle (+/-2) go to higher size for close fitting garments and to the smaller size for loose fitting garments.

IMPORTANT! In case you fall into one size according to your B measurement (for example 36) and a different size according to your W and H measurements (for example 40), then you'll have to adjust the pattern at the waist and hip lines.

Choosing Your Size

ATTENTION!

Our brand uses **different size charts** for different patterns.

Make sure to **check your size** for each project. Also do not rely on the ready to wear garment size you buy in shops.

How to measure your size:

The best thing you can do is, to get a friend or a family member to help you.

The measurements should be taken in the same Underwear / undergarments in which you will wear the garment.



Size Chart

The following 2 measurements we need: **Waist and Hip**.

The measurement of the Hip should be taken in the most protruding part of the body. The measurement tape should be taut but it shouldn't deform your body. If you can still put a finger between the measurements tape you are good.

The pattern is designed for height of 160cm (63").

SIZE /CM	XXS	XS	S	M	L	XL	XXL	XXXL
WAIST	60	64	68	72	76	80	84	88
HIP	90	94	98	102	106	110	114	118

SIZE /INCHES	XXS	XS	S	M	L	XL	XXL	XXXL
WAIST	23.6	25.25	26.75	28.25	30	31.5	33	34.6
HIP	35.5	37	38.6	40.25	41.75	43.25	45	46.5


Fabric Requirements

Amount of Fabric Required		XXS	XS	S	M	L	XL	XXL	XXXL
150-152 cm wide plain fabric/ fabrics with shine or directional pattern	amount in metre(s)	1.4 / 1.8							
58-60" wide plain fabric/ fabrics with shine or directional pattern	amount in yard(s)	1.55 / 1.95							

Recommended Fabrics

This pattern is best suited for middle weight fabrics such as Cotton, Linen, Denim, Chambray, Taffeta.

This pattern is not suitable for knitted fabrics.

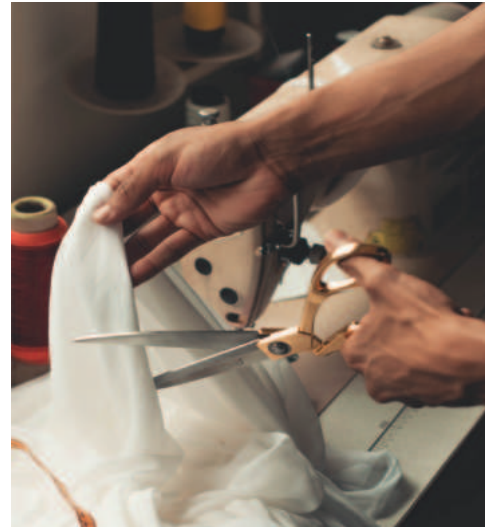

Most natural fibers shrink in the wash, be sure to have enough fabric in case of shrinkage.

The fabric requirements assume that the fabric is already pre-shrunk.

Before we cut the patterns on the fabric, you should try to get as much shrinkage out as possible (wash, steam, iron, dry). Natural materials usually need a lot of steam to shrink the material. It is better to shrink it now than after cutting as your garment will not be the correct size.

Also, buy 5% more fabric in case of shrinking.

Also check to make sure the grain-line of your fabric has not been distorted.

Printing Instructions



Let us print out the pattern.

There are 3 options on how to print the pattern:

A4 and US Letter size - these are tiled versions which you can print out at home on your desktop computer.

AO size - You can go to a copy shop and print it on a big scale. The nice thing is it is one sheet of paper and saves you the time of sticking pages together.

PRINTING CHECKLIST !


- Select your layers
- Enter print pages
- Orientation set to auto
- Set scale to 100%
- Print the Test Page
- Check your scale

Two test squares are provided to help ensure your pattern prints in the right size.

Depending on the test square you measured, it should be either 5cm x 5cm or 2" x 2".

If it has the wrong measurement, check your printer settings and try again.

NOTE : The pattern will not sew in the correct size if the Test Square does not measure correctly.

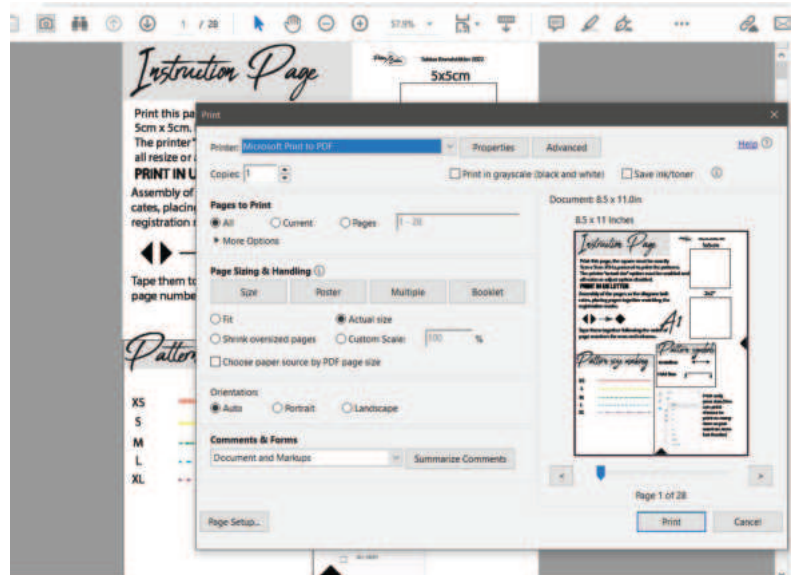

IMPORTANT:



Do not open or print the pattern in Microsoft Word.

In order to print this pattern you need the Adobe Acrobat Reader software. This software is available for free download on the internet.


Pattern Layout

See the image below which shows how each sheet of paper will be placed.
Use the corner marks to align each paper next to each other.
Stick the sheets together using the number on the pages and the layout below as a guide.


Helpful Video link by a client on
how to assemble the pattern pieces:
<https://youtu.be/cOW1K41QOBQ>

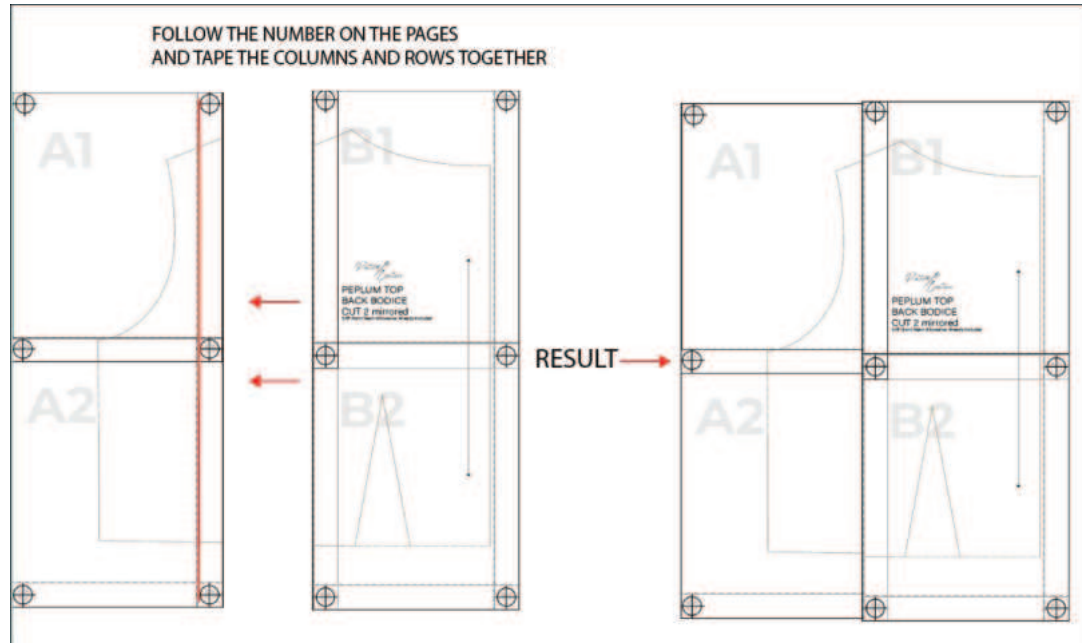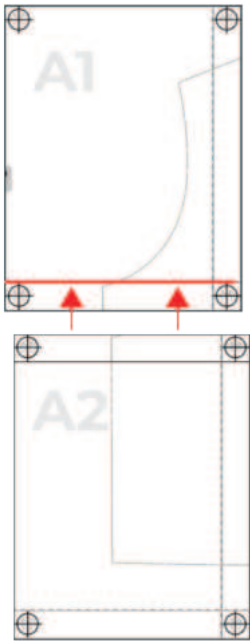

A4 LAYOUT

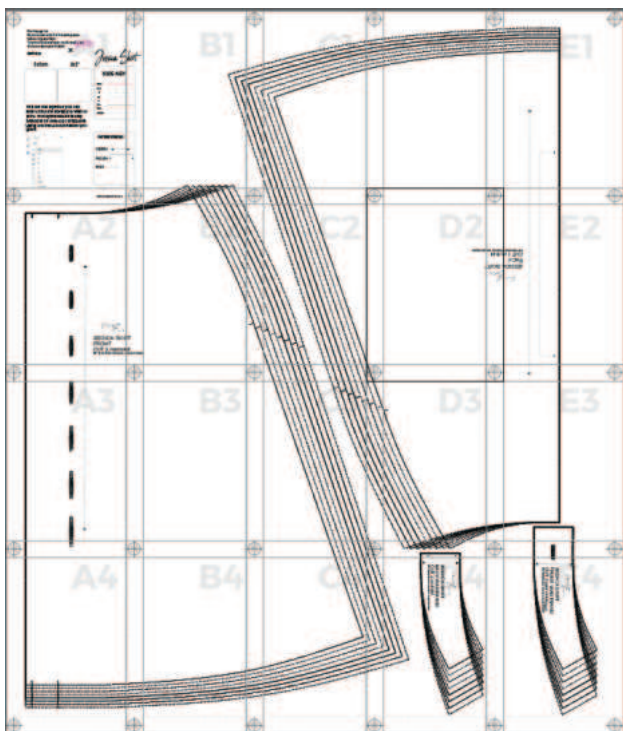

US LETTER LAYOUT

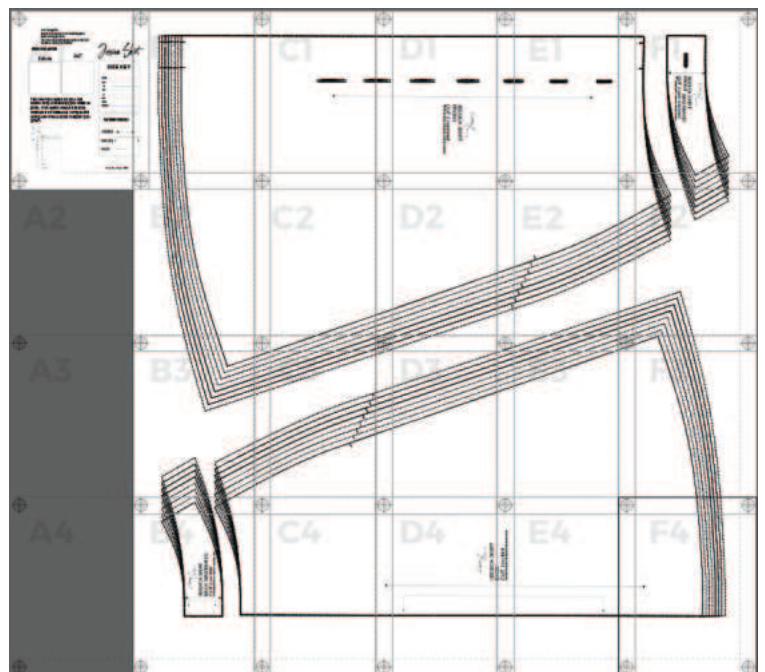


Fabric Cutting Instructions


Pattern Piece Name	Pieces to Cut
Front	Cut 2 mirrored
Front waistband	Cut 2 pair mirrored
Back	Cut 1 on fold
Back waistband	Cut 2 on fold

Fabric Layout

FOR PLAIN FABRICS

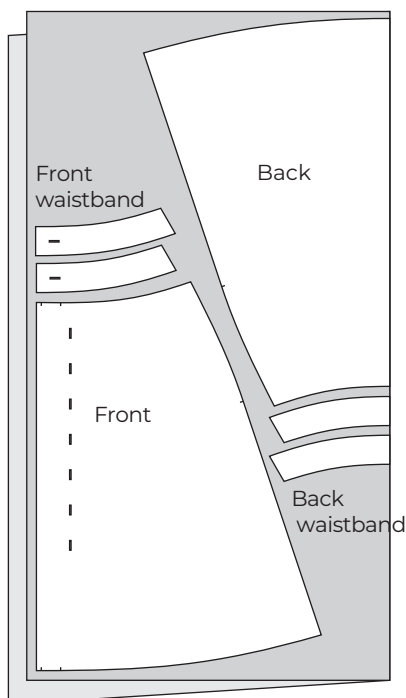

FOR FABRICS WITH SHINE
OR DIRECTIONAL PATTERN

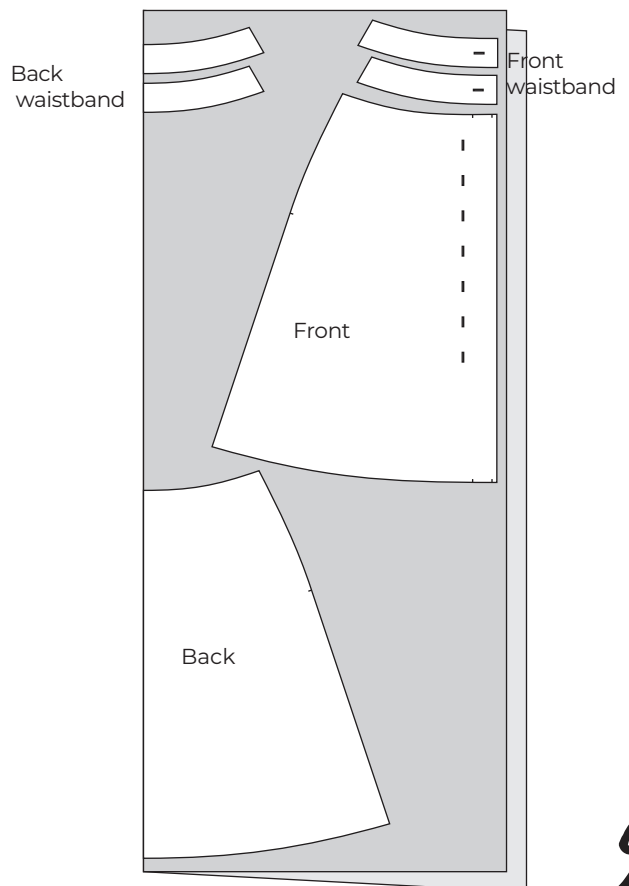

FABRIC
IS ON
FOLD

Tips and Tricks when sewing with woven (non stretch) fabrics

Choose the Right Needle:

Use a universal or sharp needle for most woven fabrics.

For heavyweight fabrics like denim or canvas, consider using a jeans/denim needle.

Select the Right Thread:

Choose a good quality, all-purpose polyester or cotton thread for most woven fabrics.

Match the thread color to your fabric for a more polished look.

Prewash Your Fabric:

Pre-wash your fabric to prevent shrinkage after your garment is completed.

This is especially important if your final garment will be washed.

Use the Right Stitch Length:

For most woven fabrics, a stitch length of 2.5 to 3.0 mm works well.

Adjust the length based on the weight of the fabric.

Finish Raw Edges:

Serge, zigzag, or use pinking shears to finish raw edges and prevent fraying.

Alternatively, you can use French seams for a neat finish on lightweight fabrics.

Press as You Go:

Press your seams as you sew. Use a hot iron and steam to set the stitches and create crisp seams.

Grainline Matters:

Pay attention to the grainline of your fabric. Cut pieces on the straight grain unless the pattern indicates otherwise.

Staystitch Curves:

Staystitching helps stabilize curves and prevents stretching.

Stitch along the seam line within the seam allowance.

Use Interfacing:

For areas that need extra stability, like collars and cuffs, use interfacing. It prevents these areas from becoming too limp.

Mark Your Fabric:

Use tailor's chalk, disappearing ink pens, or tailor's tacks to mark darts, notches, and other important points accurately.

Clip Curves and Notches:

Clip into seam allowances on curves to help the fabric lay flat. Make small notches at the seam allowance for easier alignment.

Test on Scrap Fabric:

Always test your stitches and settings on a scrap piece of fabric before sewing the actual garment.

Understand Fabric Properties:

Different fabrics behave differently. Understand the properties of the fabric you're working with, such as its drape, weight, and stretch.


Practice Precision:

Be precise with your cutting, marking, and sewing. Accurate measurements and cuts lead to a more professional-looking garment.

Sewing Instructions

Note :

Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side




Highlight of current step

PREPARATION STEP: TRANSFER ALL NOTCHES TO THE FABRIC.
MARK THE PLACEMENT OF THE BUTTONHOLES ON THE RIGHT FRONT
AND RIGHT FRONT WAISTBAND USING BASTING STITCHES

Step 1: PREPARING FRONT AND FRONT WAISTBAND

Cut 5cm or 2" wide straps of non-woven fusible interfacing and iron onto the wrong side of the right Front and right Front Waistband to cover the placement of the buttonholes.


Note: if the fabric is slippery or loose, completely cover all waistbands with a fusible interfacing (using corresponding patterns to cut). Completely cover the front placket of both Fronts as well (cut interfacing 8cm or 3 1/8" wide).

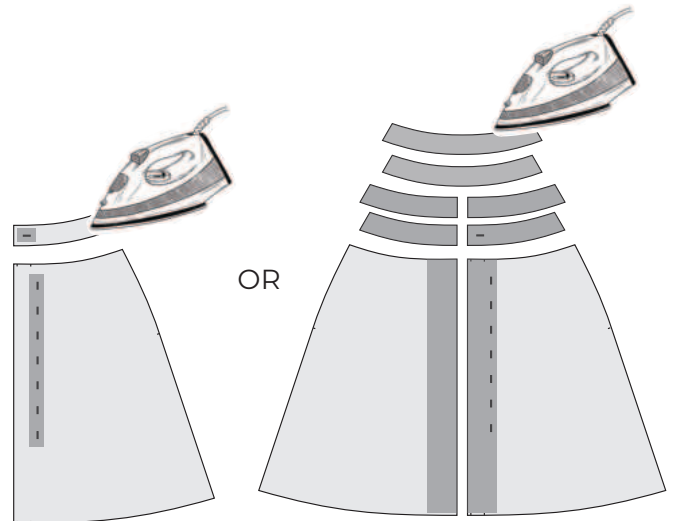

Step 2: PREPARING THE FRONT PLACKETS

a) Fold the center edges of the Fronts at first notches wrong sides of the fabric together and press. Fold again at second notches and press.


b) Sew the plackets at 2mm or 1/16" from the fold. Press.

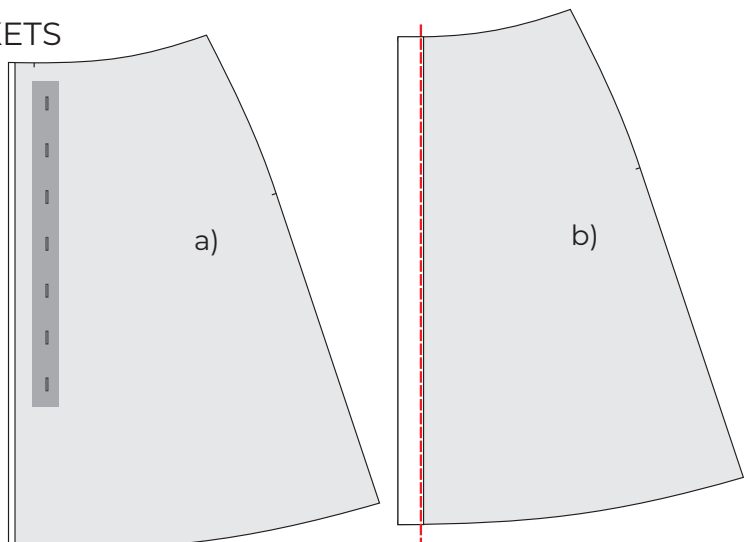

Sewing Instructions

Note :


Seam allowance is $\frac{3}{8}$ " (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side




Highlight of current step

Step 3: SEWING THE SIDE SEAMS

Match the Fronts and Back with right sides of the fabric together and sew the side seams at 1cm or $\frac{3}{8}$ " aligning hip notches.

Finish the edges together with zigzag or serger and press to the back (if the fabric is thick the sides should be finished separately prior to sewing together, the seam allowances should be pressed open).

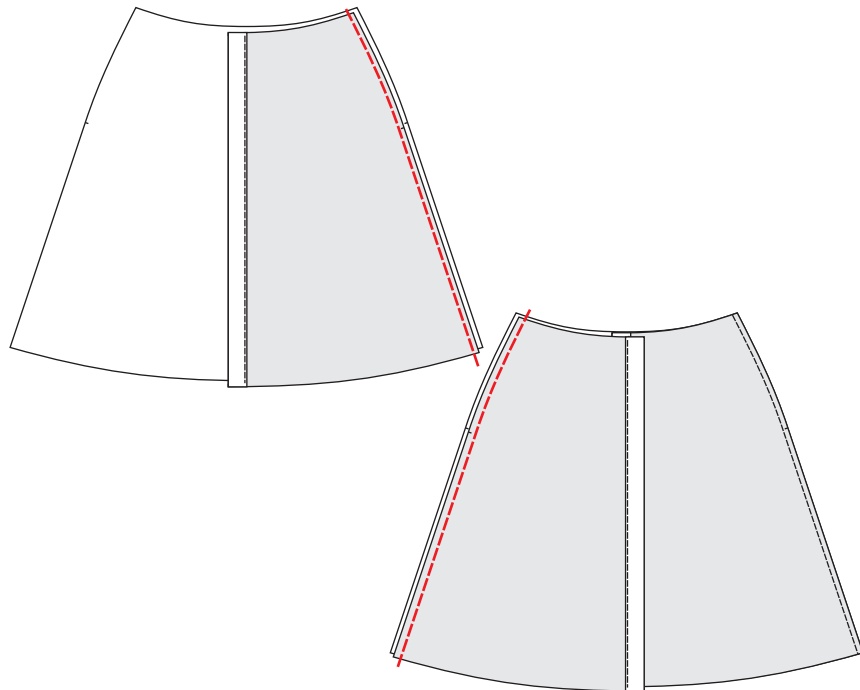


Step 4: SEWING THE HEM

Fold the bottom edge of the skirt twice at 1cm or $\frac{3}{8}$ " right sides of the fabric together and sew.

Press


(if the fabric is thick the bottom edge should be finished with zigzag or serger, then folded once at 1cm or $\frac{3}{8}$ " and sewn).

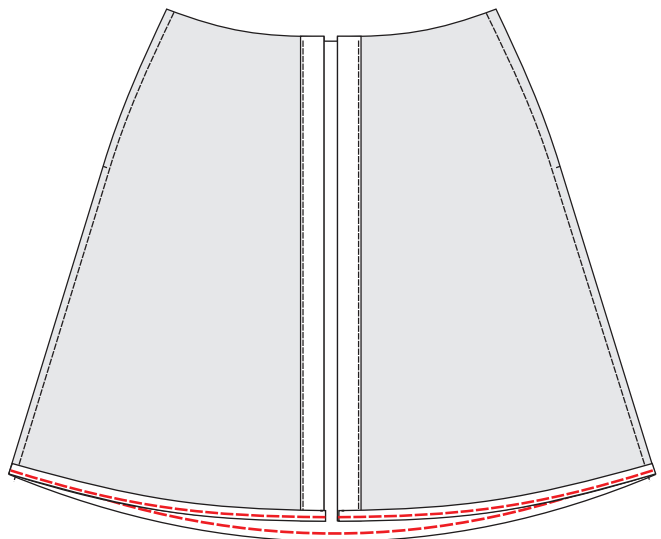


Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side




Highlight of current step


Step 5: SEWING THE WAISTBAND

a) Match one pair of Front Waistbands and one Back Waistband with right sides of the fabric together as shown in the illustration and sew the side seams at 1cm or 3/8".

Press the seam allowances open.

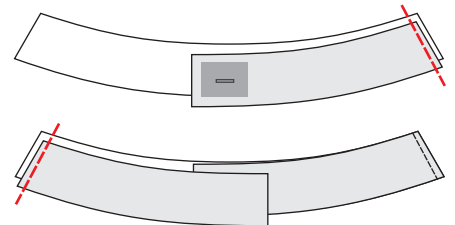


b) Repeat on the other pair of Front Waistbands and remaining Back Waistband. Resulted two waistbands should make a pair together. Press the seam allowances open.

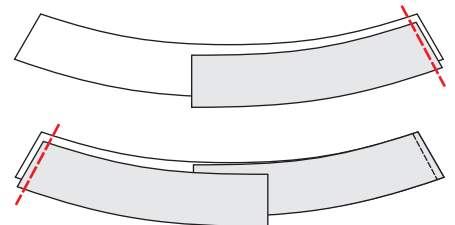


Step 6:

Match resulted two waistbands with right sides of the fabric together and sew indicated edges at 1cm or 3/8" aligning the side seams. Press, cut the corners to reduce the thickness.

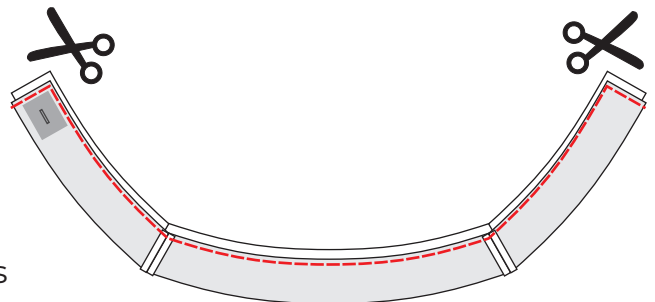


Turn the waistband right side out and press carefully.

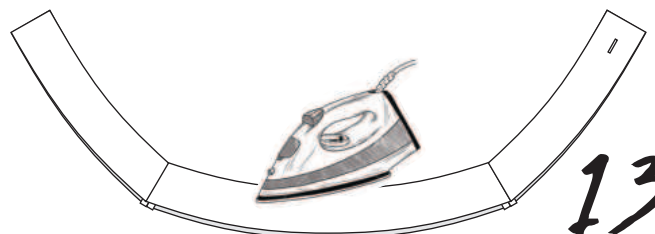

Sewing Instructions

Note :

Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side




Fabric Wrong Side



Highlight of current step


Step 7: JOINING THE WAISTBAND AND THE SKIRT

Match ONLY the layer of the waistband with buttonhole marking, and the waistline of the skirt with right sides of the fabric together and sew at 1cm or 3/8" aligning the side seams. Press the seam allowance into the waistband.

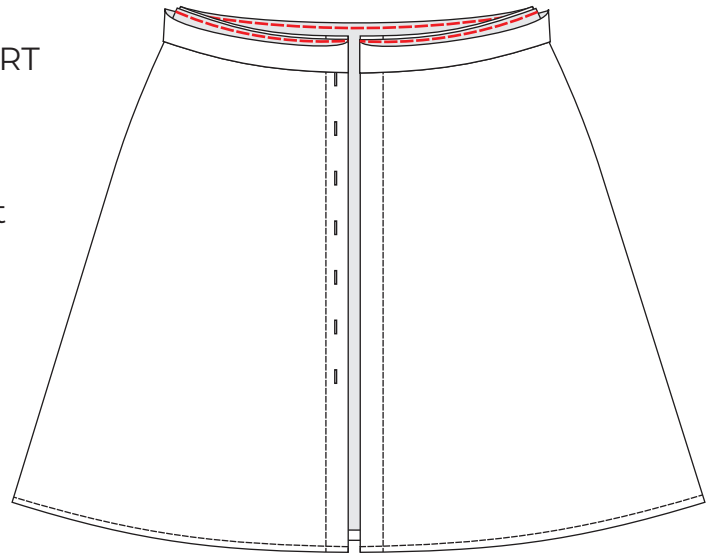

Step 8:


Fold the other layer of the waistband wrong sides of the fabric inward at 8mm or 5/16" to cover the seam allowance and previous seam. Pin and sew two layers of the waistband together with a topstitch at 2mm or 1/16" from the fold on the right side of the skirt. Make sure to align the side seams. Press.

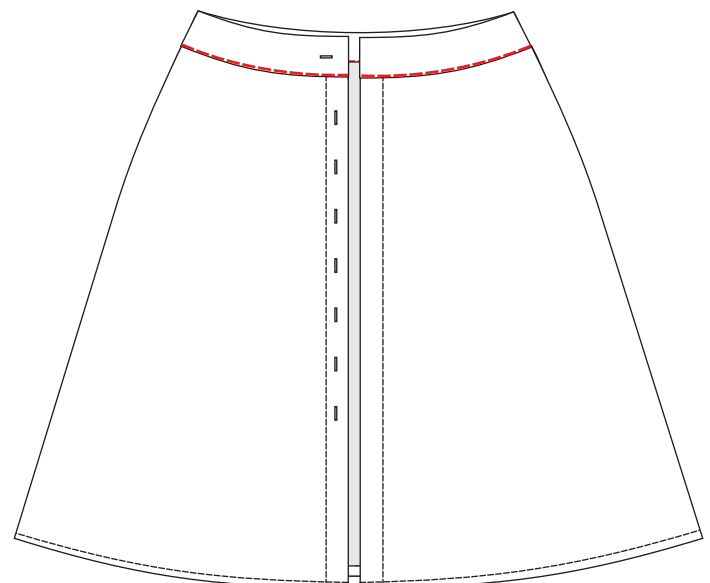

Sewing Instructions

Note :

Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side




Highlight of current step

Step 9: MAKING THE BUTTONHOLES AND SEWING THE BUTTONS

Mark the placement of the buttonholes with a fabric marker and remove the basting made in preparation step.
Make the buttonholes.

Overlap the plackets by 4cm or 1 5/8" and mark the placement of the buttons.
Sew on the buttons.
Steam the garment.

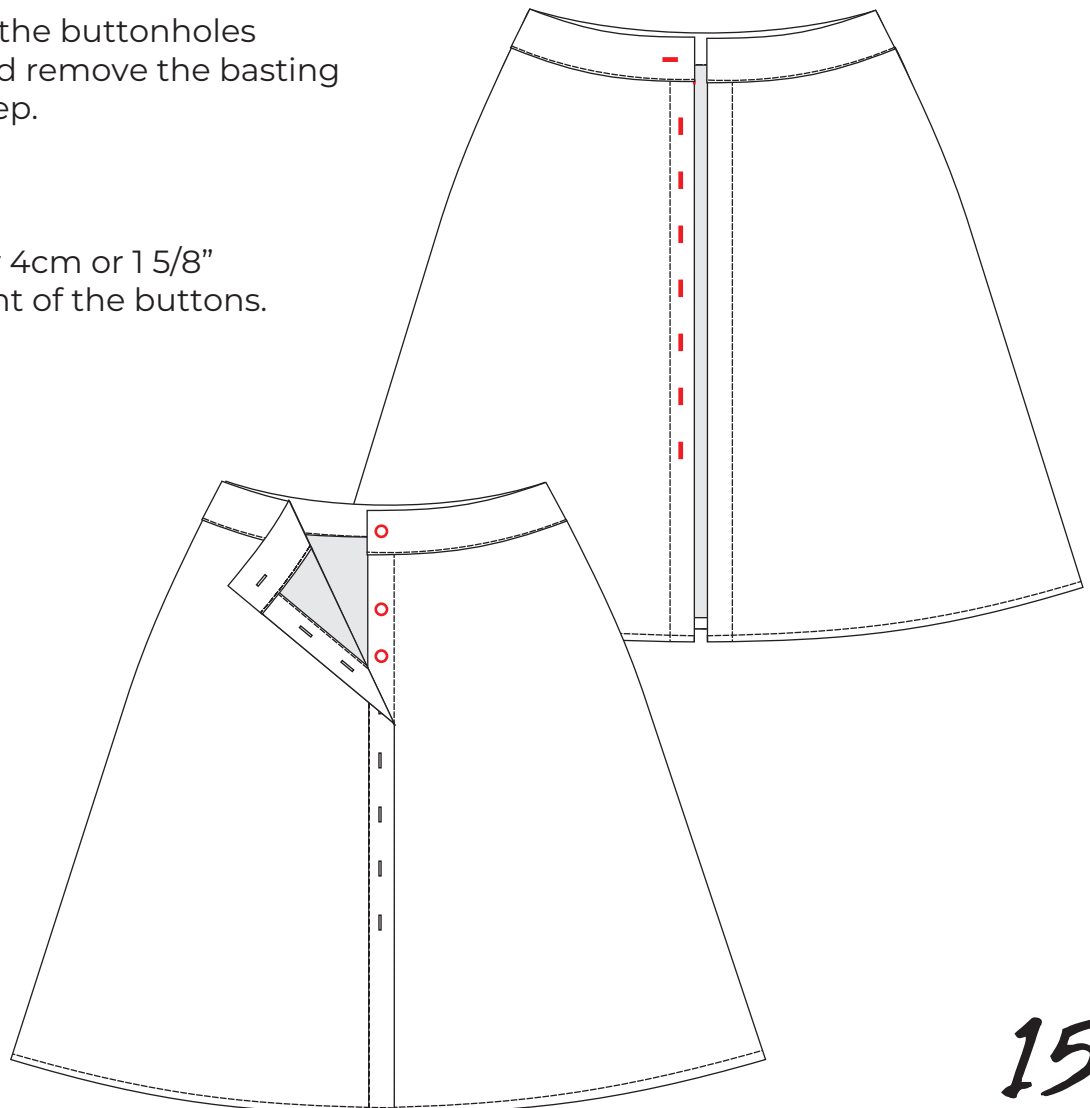

FINAL LOOKS !



We hope you have had a lot of fun with this pattern. Do not forget to share your finished result on Instagram at

@patterncouture_

for a chance to win a free sewing pattern.

