

# *Portofino Skirt*



## **ILLUSTRATED TUTORIAL**

SIZES: XXS - XXXL

ADVANCED



Thank you so much for choosing our pattern!

Pattern Couture knows that there is something magical about choosing the perfect style , and creatively making your own clothes!

Our goal is to make beautiful patterns that all our clients will enjoy sewing and also feel very proud wearing!

Happy Sewing !

If you ever need any help or if you have any questions you can always write to us on Etsy or on our e-mail address **help.patterns@gmail.com**

We wish you a wonderful day and a lot of fun with your sewing project.

Do not forget to share your finished result on Instagram (P.S. add us **@patterncouture\_** for a chance to win a free sewing pattern.

*XO Katya & Tobias*

# Table of Contents



| Page<br>Number | Contents                                     |
|----------------|----------------------------------------------|
| 1              | Welcome !                                    |
| 2              | Table of Contents                            |
| 3              | About the Pattern<br>Sewing Supplies List    |
| 4              | Taking Body Measurements                     |
| 5              | Size Chart and Choosing Your Size            |
| 6              | Fabric Requirements<br>Recommended Fabrics   |
| 7              | How to Print your Pattern                    |
| 8              | Printing Layout / Pattern Assembly           |
| 9              | Fabric Cutting Instructions<br>Fabric Layout |
| 10             | Tips and tricks                              |
| 11-20          | Sewing Instructions                          |
| 21             | Final Look Photos<br>Win a free pattern!     |

## ABOUT THE PATTERN

Meet the Portofino Skirt.

This sexy skirt will be your companion for summer parties. It can be paired with any type of footwear and handbags. Match with the top of the same set.

This pattern comes in sizes XXS-XXXL.

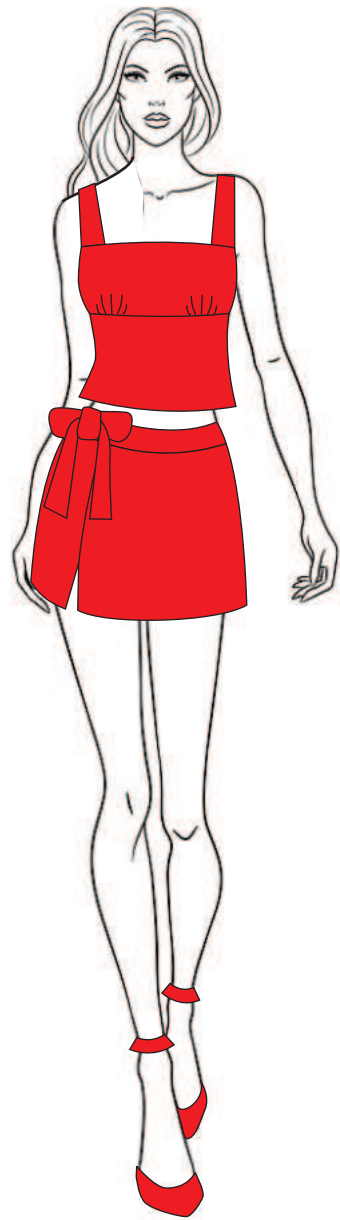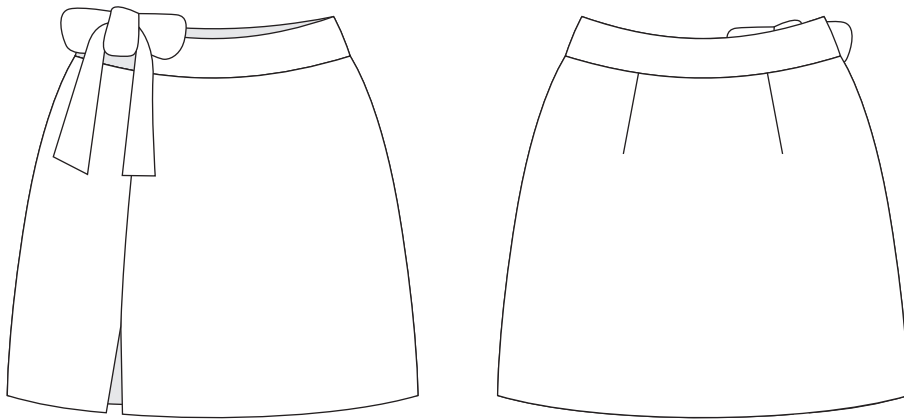

## Sewing Supplies Checklist

- Straight and zigzag sewing Machine
- Measuring tape
- Scissors
- Pins or clips
- Coordinating thread
- Fabric marker
- Hand sewing needle
- Seam ripper


### Notions:

- Invisible zipper sewing foot or one-sided foot
- 15cm or 6" long invisible zipper

### Optional:

Serger



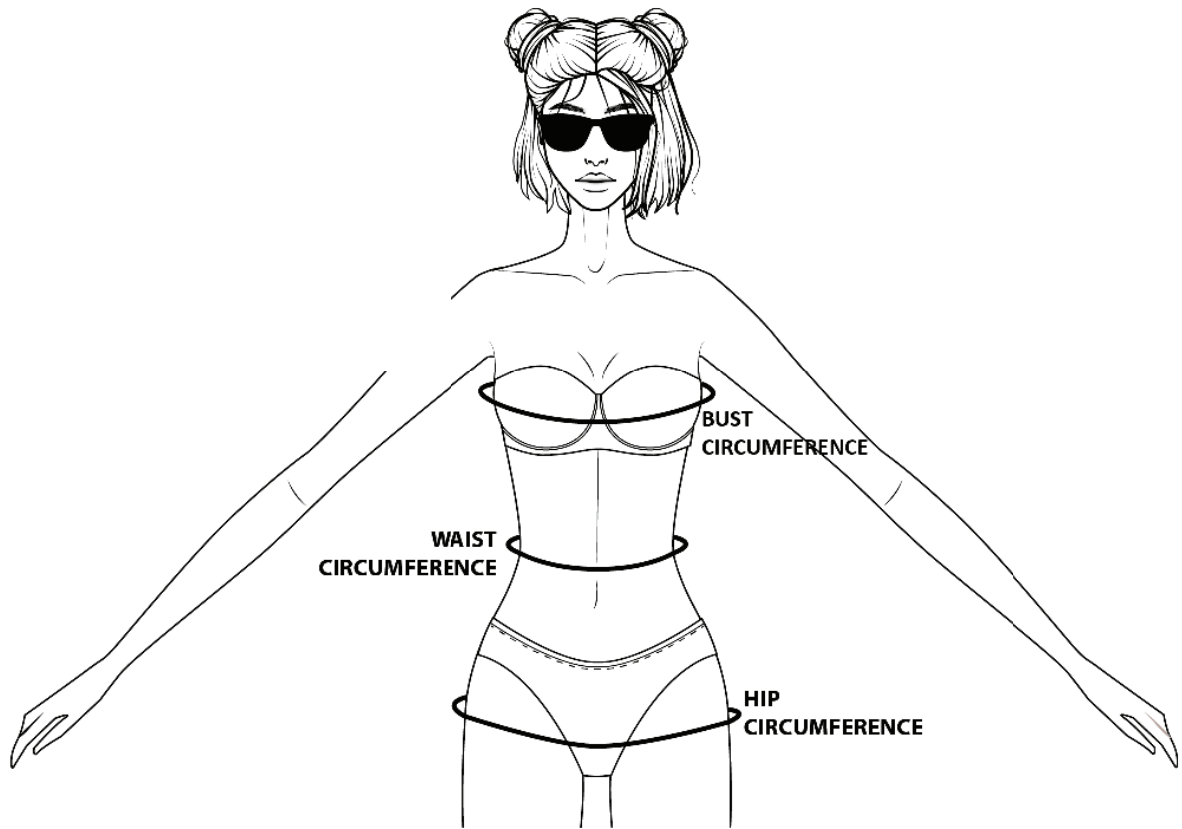

In order to pick the right size, you need to compare your measurements with the measurements from the size guide.

For top garments (dress, blazer, coats, tops..) base your size decision according to the bust circumference.

For bottom garments (skirts, pants, shorts...) base your size decision to the hip circumference.

If your measurement fall between two sizes, you should pick the size which your measurement comes closest to.

For example if your bust size is 79cm or 31" choose XXS.

If you fall exactly into the middle (+/-2) go to higher size for close fitting garments and to the smaller size for loose fitting garments.

**IMPORTANT!** In case you fall into one size according to your B measurement (for example 36) and a different size according to your W and H measurements (for example 40), then you'll have to adjust the pattern at the waist and hip lines.

# Choosing Your Size

## ATTENTION!

Our brand uses **different size charts** for different patterns.

Make sure to **check your size** for each project.

Also do not rely on the ready to wear garment size you buy in shops.

## How to measure your size:

The best thing you can do is, to get a friend or a family member to help you.

The measurements should be taken in the same Underwear / undergarments in which you will wear the garment.



## Size Chart

The following 3 measurements we need: **Waist and Hip.**

The measurements of the Hip should be taken in the most protruding part of the body. The measurement tape should be taut but it shouldn't deform your body. If you can still put a finger between the measurements tape you are good.

| SIZE /CM | XXS | XS | S  | M   | L   | XL  | XXL | XXXL |
|----------|-----|----|----|-----|-----|-----|-----|------|
| WAIST    | 60  | 64 | 68 | 72  | 76  | 80  | 84  | 88   |
| HIP      | 90  | 94 | 98 | 102 | 106 | 110 | 114 | 118  |

| SIZE /INCHES | XXS  | XS    | S     | M     | L     | XL    | XXL | XXXL |
|--------------|------|-------|-------|-------|-------|-------|-----|------|
| WAIST        | 23.6 | 25.25 | 26.75 | 28.25 | 30    | 31.5  | 33  | 34.6 |
| HIP          | 35.5 | 37    | 38.6  | 40.25 | 41.75 | 43.25 | 45  | 46.5 |




# Fabric Requirements

| Amount of Fabric Required |                    | XXS | XS | S | M | L | XL | XXL | XXXL |
|---------------------------|--------------------|-----|----|---|---|---|----|-----|------|
| 150-152 cm wide fabric    | amount in metre(s) | 1   |    |   |   |   |    |     |      |
| 59-60" wide fabric        | amount in yard(s)  | 1.1 |    |   |   |   |    |     |      |

## Recommended Fabrics

This pattern is best suited for lightweight fabrics, such as Cotton, Linen, Sateen, Polyester.

This pattern is not suitable for stretchy fabrics.

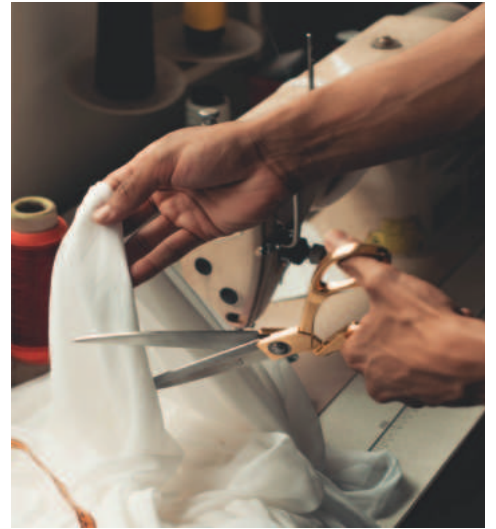

Most natural fibers shrink in the wash, be sure to have enough fabric in case of shrinkage.

The fabric requirements assume that the fabric is already pre-shrunk.

Before we cut the patterns on the fabric, you should try to get as much shrinkage out as possible (wash, steam, iron, dry). Natural materials usually need a lot of steam to shrink the material. It is better to shrink it now than after cutting as your garment will not be the correct size.

Also, buy 5% more fabric in case of shrinking.

Also check to make sure the grain-line of your fabric has not been distorted.

# Printing Instructions



Let us print out the pattern.

There are 3 options on how to print the pattern:

A4 and US Letter size - these are tiled versions which you can print out at home on your desktop computer.

AO size - You can go to a copy shop and print it on a big scale. The nice thing is it is one sheet of paper and saves you the time of sticking pages together.

## PRINTING CHECKLIST !


- Select your layers
- Enter print pages
- Orientation set to auto
- Set scale to 100%
- Print the Test Page
- Check your scale

Two test squares are provided to help ensure your pattern prints in the right size.

Depending on the test square you measured, it should be either 5cm x 5cm or 2" x 2".

If it has the wrong measurement, check your printer settings and try again.

NOTE : The pattern will not sew in the correct size if the Test Square does not measure correctly.

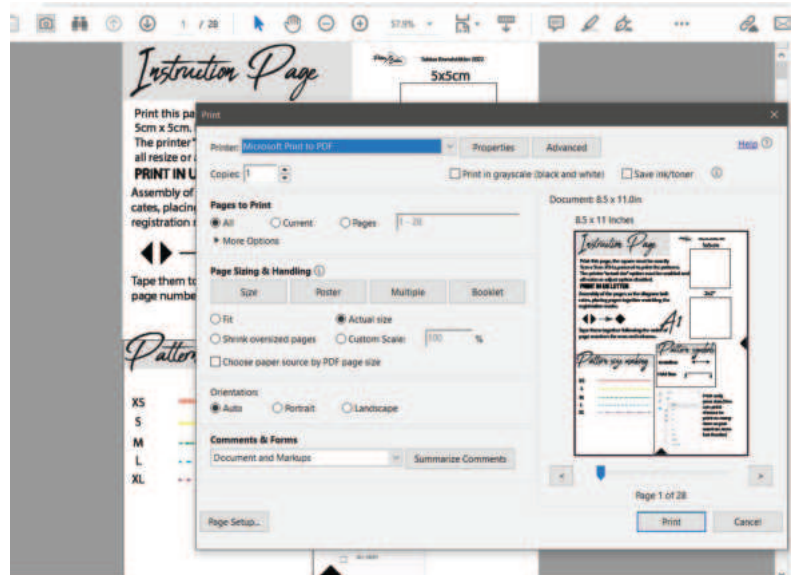

## IMPORTANT:

Do not open or print the pattern in Microsoft Word.



In order to print this pattern you need the Adobe Acrobat Reader software. This software is available for free download on the internet.




# Pattern Layout

See the image below which shows how each sheet of paper will be placed.  
Use the corner marks to align each paper next to each other.  
Stick the sheets together using the number on the pages and the layout below as a guide.


Helpful Video link by a client on  
how to assemble the pattern pieces:  
<https://youtu.be/cOW1K41QOBQ>

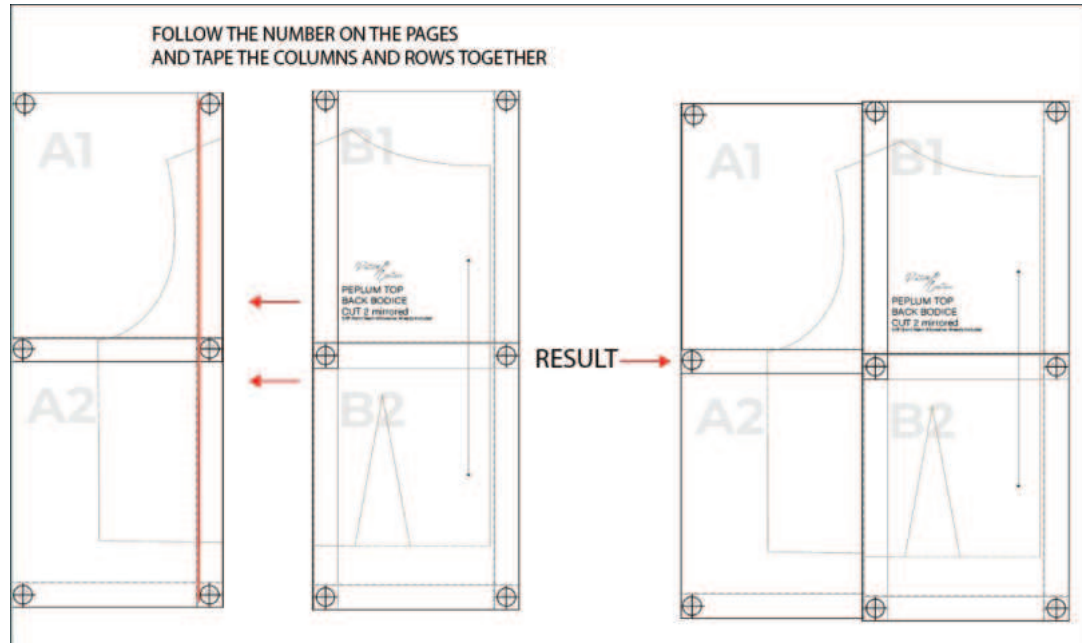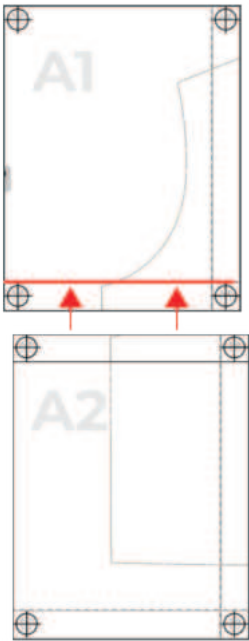

## US LETTER LAYOUT

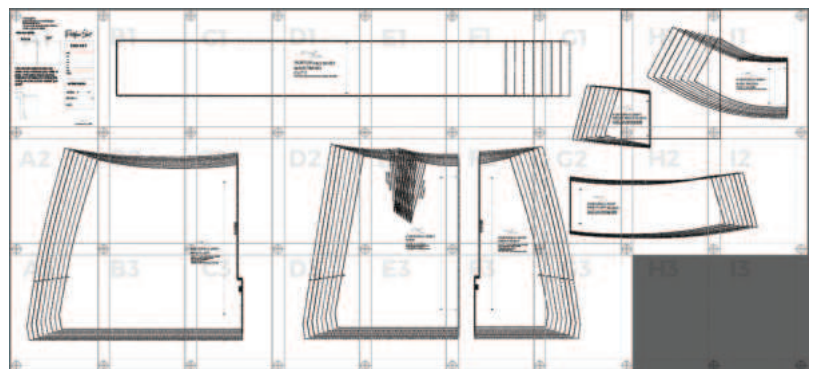

## A4 LAYOUT

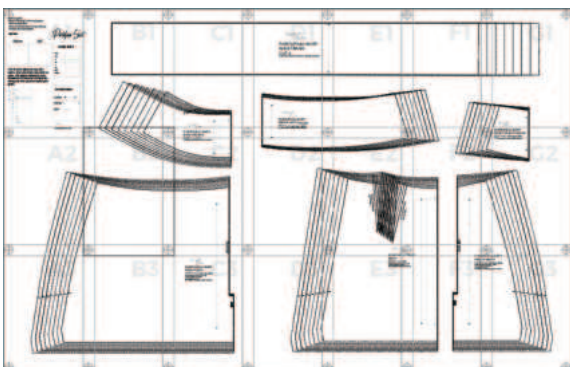


# Fabric Cutting Instructions


|                    |                     |
|--------------------|---------------------|
| Front right        | Cut 1 on wrong side |
| Front left         | Cut 1 on wrong side |
| Back               | Cut 1 on fold       |
| Front right facing | Cut 1 on wrong side |
| Front left facing  | Cut 1 on wrong side |
| Back facing        | Cut 1 on fold       |
| Waistband          | Cut 2               |

## Fabric Layout

FABRIC IS ON FOLD

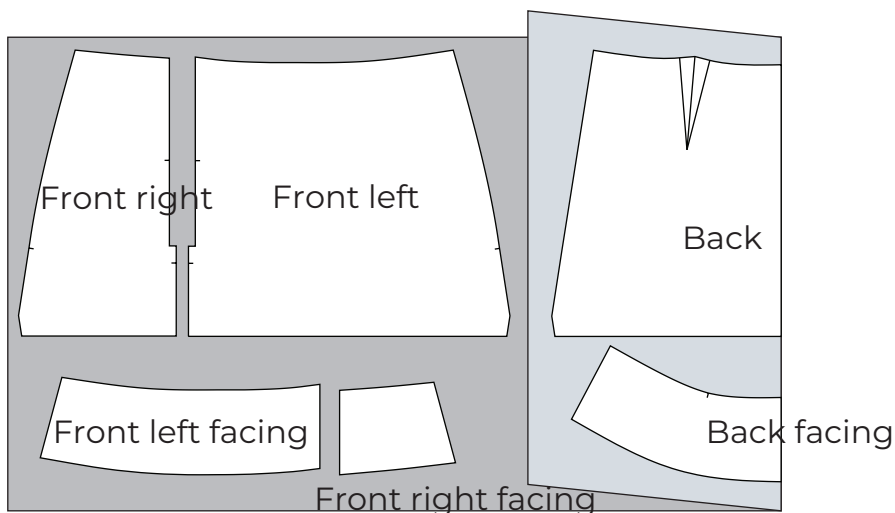

FABRIC IS NOT ON FOLD

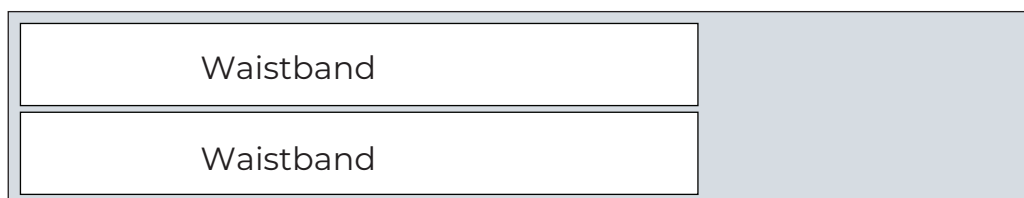

# *Tips and Tricks when sewing with woven (non stretch) fabrics*

## **Choose the Right Needle:**

Use a universal or sharp needle for most woven fabrics.

For heavyweight fabrics like denim or canvas, consider using a jeans/denim needle.

## **Select the Right Thread:**

Choose a good quality, all-purpose polyester or cotton thread for most woven fabrics.

Match the thread color to your fabric for a more polished look.

## **Prewash Your Fabric:**

Pre-wash your fabric to prevent shrinkage after your garment is completed.

This is especially important if your final garment will be washed.

## **Use the Right Stitch Length:**

For most woven fabrics, a stitch length of 2.5 to 3.0 mm works well.

Adjust the length based on the weight of the fabric.

## **Finish Raw Edges:**

Serge, zigzag, or use pinking shears to finish raw edges and prevent fraying.

Alternatively, you can use French seams for a neat finish on lightweight fabrics.

## **Press as You Go:**

Press your seams as you sew. Use a hot iron and steam to set the stitches and create crisp seams.

## **Grainline Matters:**

Pay attention to the grainline of your fabric. Cut pieces on the straight grain unless the pattern indicates otherwise.

## **Staystitch Curves:**

Staystitching helps stabilize curves and prevents stretching.

Stitch along the seam line within the seam allowance.

## **Use Interfacing:**

For areas that need extra stability, like collars and cuffs, use interfacing. It prevents these areas from becoming too limp.

## **Mark Your Fabric:**

Use tailor's chalk, disappearing ink pens, or tailor's tacks to mark darts, notches, and other important points accurately.

## **Clip Curves and Notches:**

Clip into seam allowances on curves to help the fabric lay flat. Make small notches at the seam allowance for easier alignment.

## **Test on Scrap Fabric:**

Always test your stitches and settings on a scrap piece of fabric before sewing the actual garment.

## **Understand Fabric Properties:**

Different fabrics behave differently. Understand the properties of the fabric you're working with, such as its drape, weight, and stretch.


## **Practice Precision:**

Be precise with your cutting, marking, and sewing. Accurate measurements and cuts lead to a more professional-looking garment.

# Sewing Instructions

Note :

Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side






Highlight of current step

## PREPARATION STEP :

Transfer all notches and markings to your fabric.

### Step 1: SEWING BACK DARTS


Fold the back skirt right sides together at the darts by the middle aligning the dart legs and sew the darts starting from the fabric edge. Press in place, then press to the center.

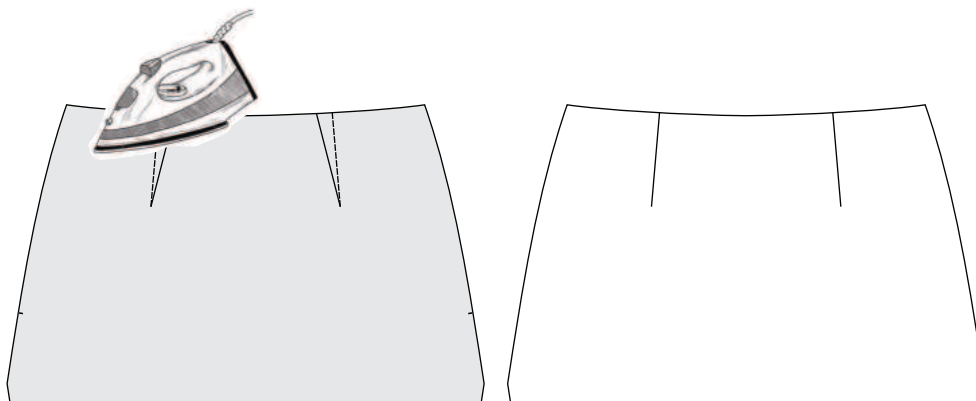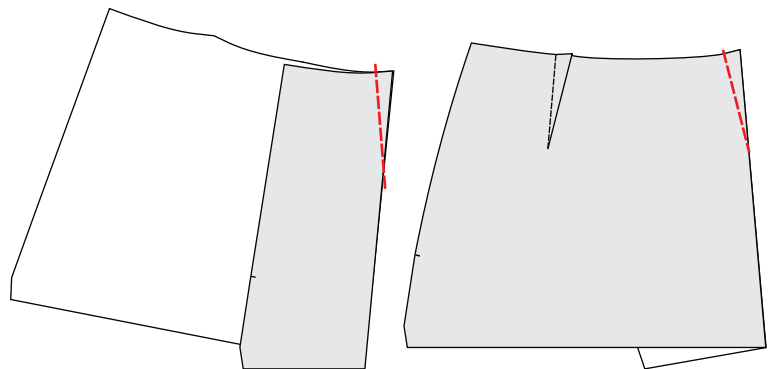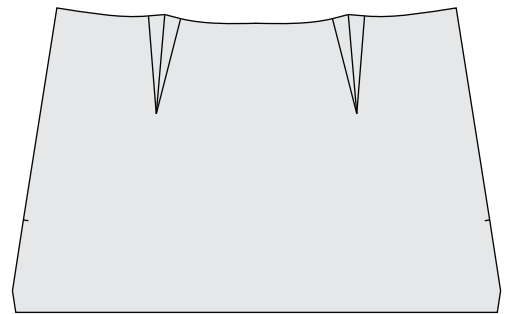

# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side




Fabric Wrong Side



Highlight of current step


## Step 2: PREPARING THE FRONT

Overcast or finish with zigzag the center edges of the front right and front left.

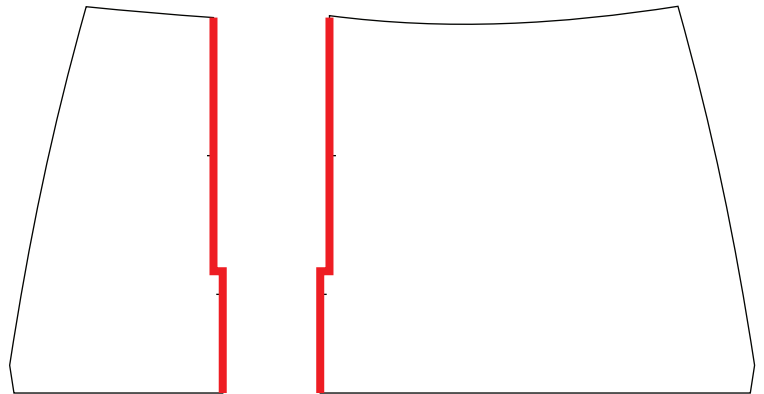


## Step 3:

Match the front right and front left with right sides of the fabric together at the center line and sew between the notches at 1cm (3/8").

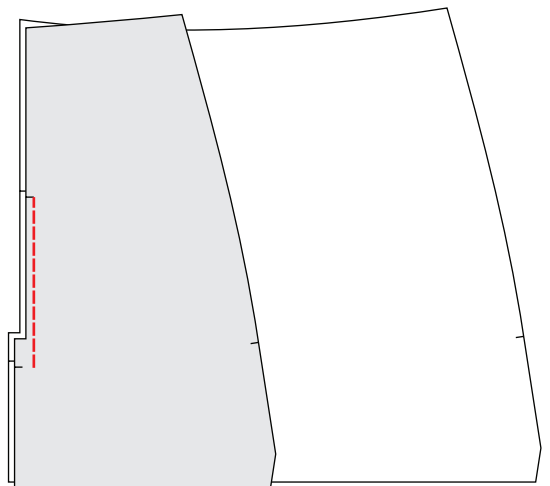

Press the seam allowance open. This will be your front.

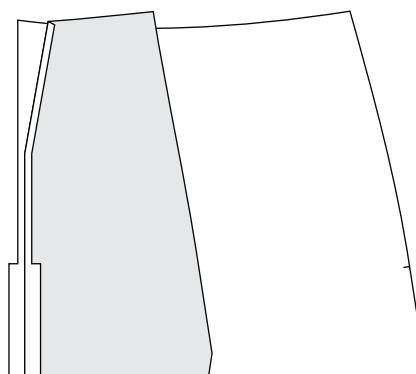




# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side



Fabric Wrong Side







Highlight of current step


## Step 4: SEWING THE ZIPPER

Match the right sides of the 15cm (6") long invisible zipper with right sides of the front center seam allowances aligning the top edges of the zipper tape with the top edges of the fabric.

Sew using an invisible zipper sewing foot or one-sided foot. Press.

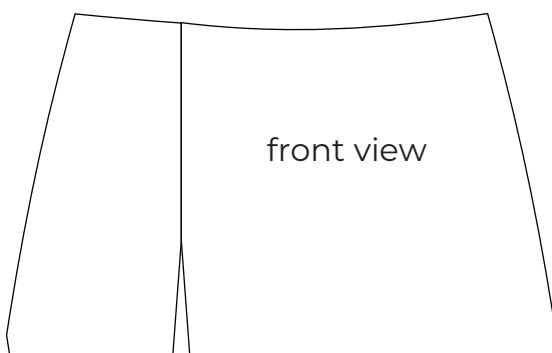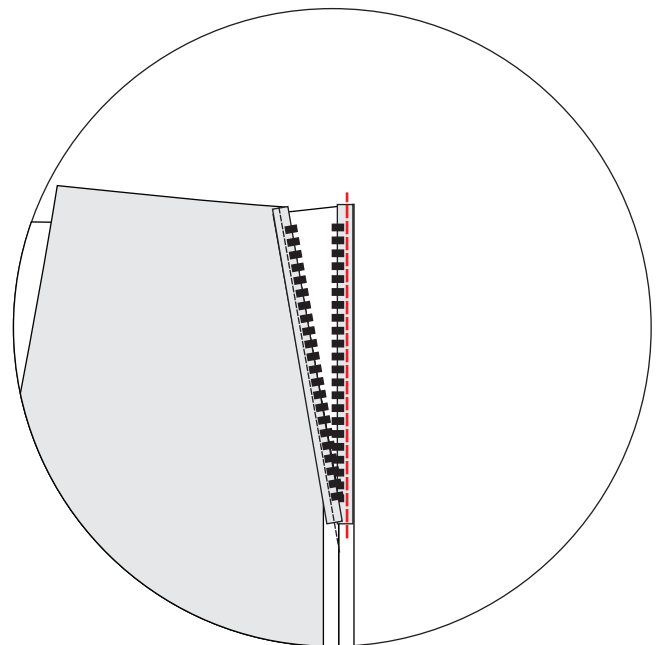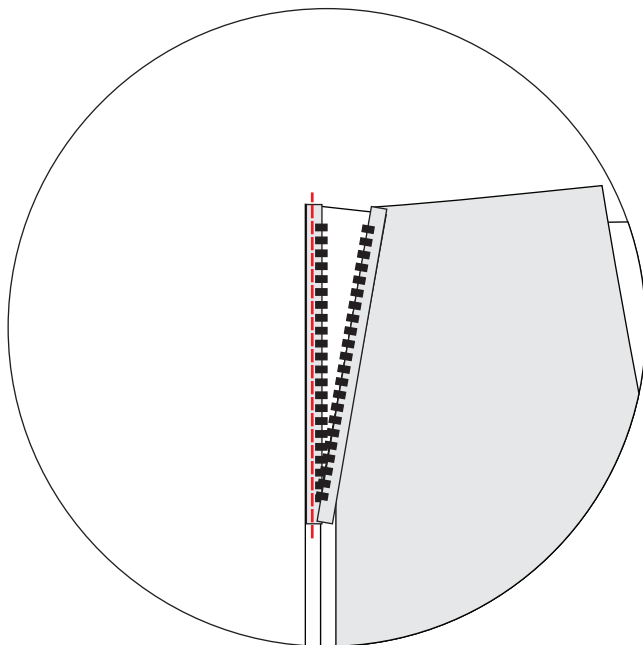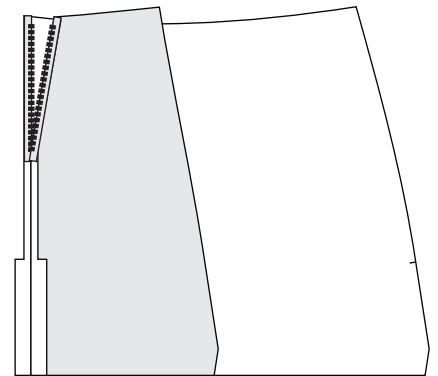

front view

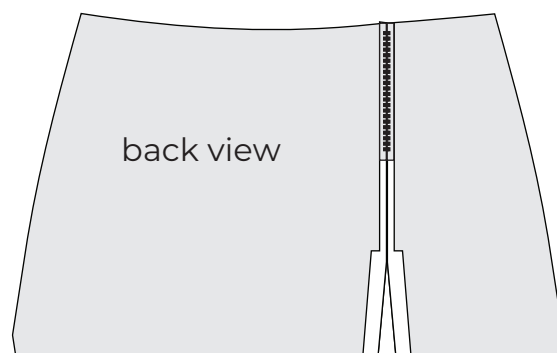


back view

# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side




Fabric Wrong Side



Highlight of current step

## Step 5: SEWING THE SIDES


Match the front and back with right sides of the fabric together and sew the side seams at 1cm or 3/8" aligning the hip notches. Overcast the seam allowances or finish with zigzag and press to the back.

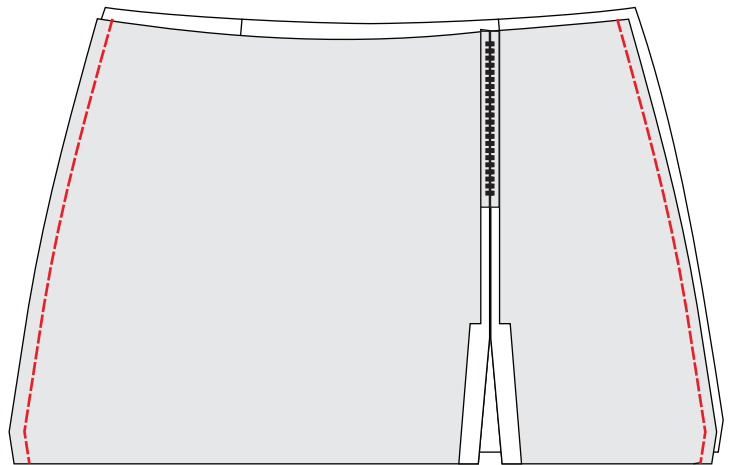

## Step 6: SEWING THE BOTTOM

Overcast or finish with zigzag the bottom edge. Press.


Fold the bottom edge at 3cm or 1 1/4" wrong sides of the fabric together and sew. Press.

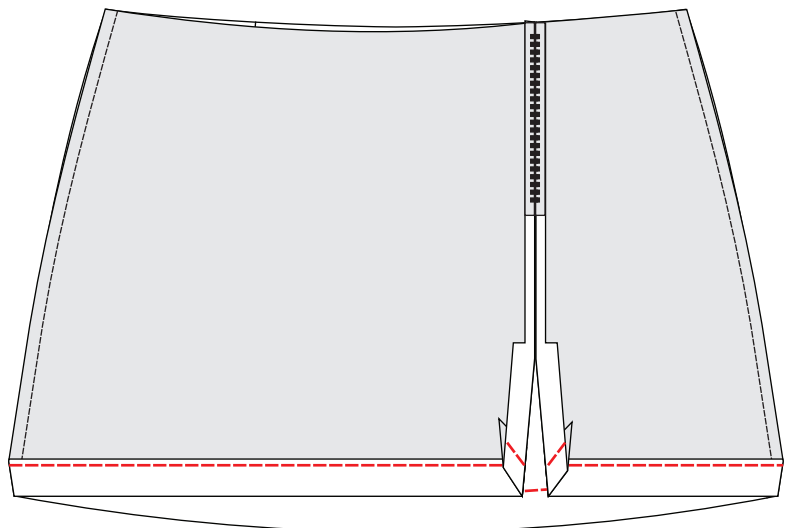

# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side





Fabric Wrong Side



Highlight of current step


## Step 7: SEWING THE SLIT

Make a topstitch around the slit opening at 1.5cm or 5/8". Press.

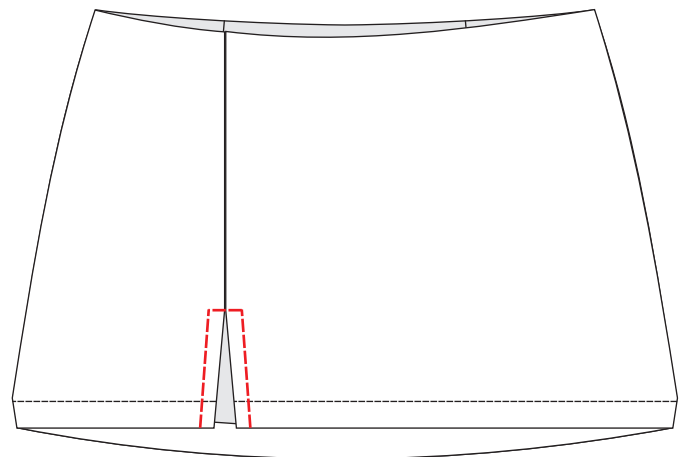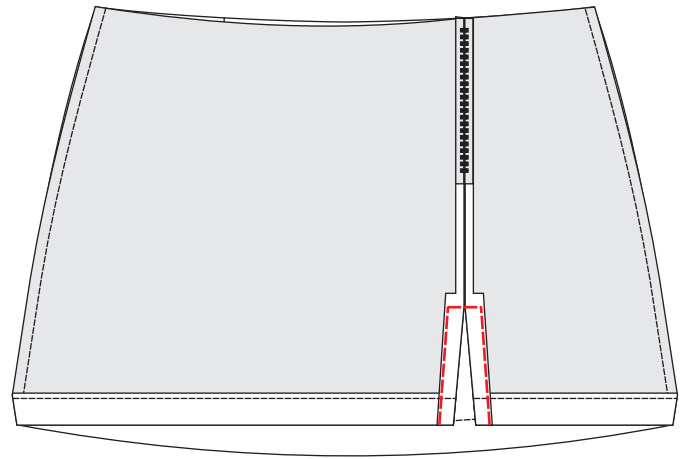

## Step 8: PREPARING THE WAISTBAND

Match the waistbands with right sides of the fabric together and sew one short side at 1cm (3/8"). Press open.

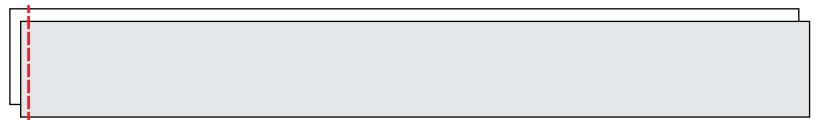

# Sewing Instructions

Note :


Seam allowance is  $\frac{3}{8}$ " (1cm) unless otherwise stated



Fabric Right Side




Fabric Wrong Side




Highlight of current step

Step 9:

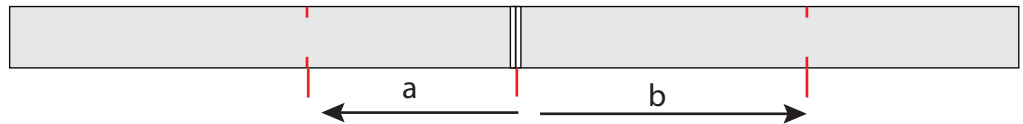


Measure the waistline of the left front and transfer the length to one side of the waistband measuring from the seam (a). Measure the waistline of the back and transfer the length to the other side of the waistband measuring from the seam (b).

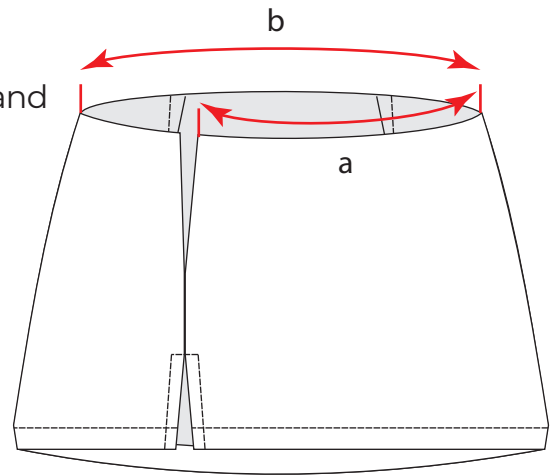

Step 10:


a) Fold the waistband right sides of the fabric together and sew indicated edges at 1cm or  $\frac{3}{8}$ ". Press.

a)




b) Cut the starting points.

b)

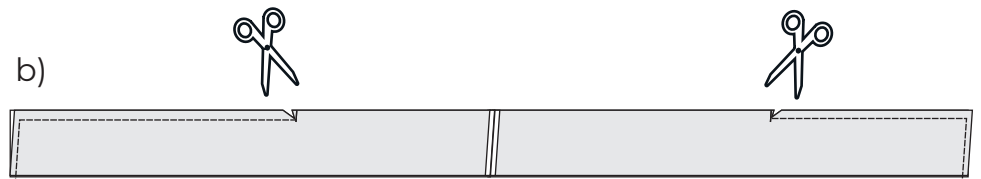

c) Turn the waistband right side out, press and sew remaining part of the two layers together at 0.5cm or  $\frac{3}{16}$ ". Press.


c)



# Sewing Instructions

Note :

Seam allowance is  $\frac{3}{8}$ " (1cm) unless otherwise stated



Fabric Right Side






Fabric Wrong Side



Highlight of current step


## Step 11: SEWING THE WAISTBAND TO THE SKIRT

Match "a" parts of the skirt and waistband, "b" parts of the skirt and waistband with right sides together and sew at 9mm ( $\frac{3}{8}$ ") aligning the side seams. Press.

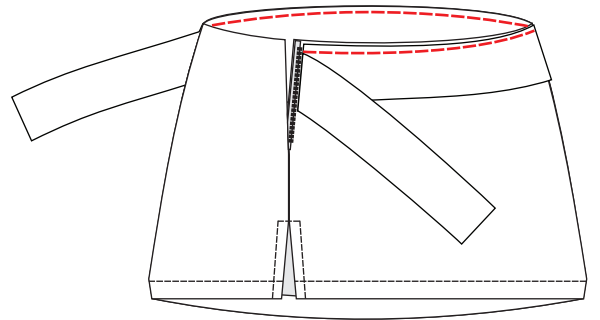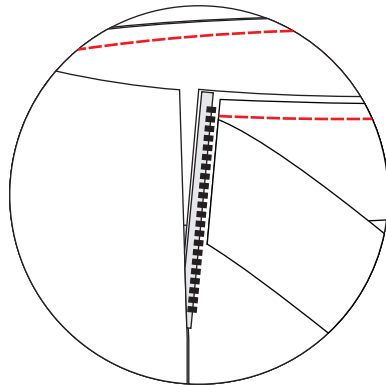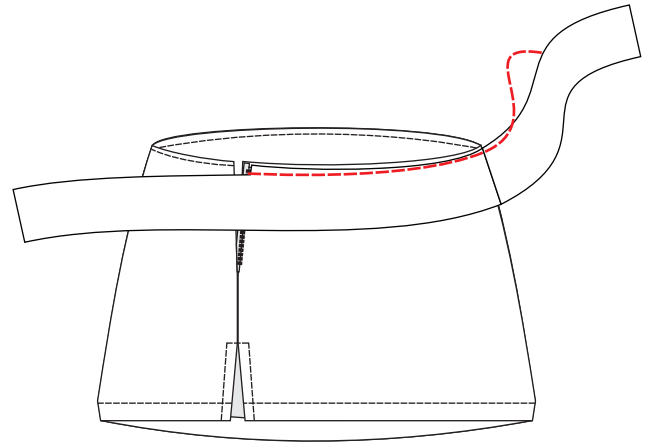

## Step 12: PREPARING THE FACING


Match the front right and left facings with the back facing with right sides of the fabric together and sew the sides at 1cm or  $\frac{3}{8}$ ". Press the seam allowances open.

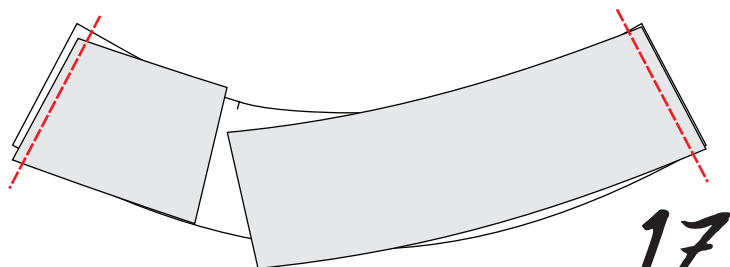

# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side




Fabric Wrong Side



Highlight of current step


## Step 13:

Overcast or finish with zigzag the bottom edge of the facing. Press.

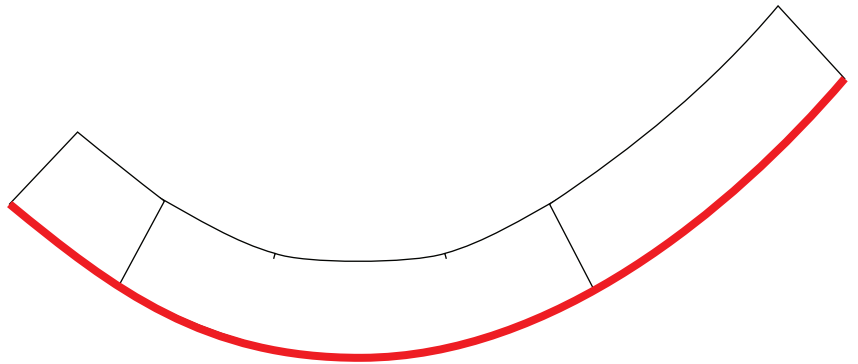

## Step 14: SEWING THE FACING TO THE SKIRT

Match the facing and the skirt at waistlines with right sides of the fabric together (the waistband should stay in between them at front left side and at the back). Sew together at 1cm or 3/8" aligning the side seams together, and the back facing notches with the back darts. Press.

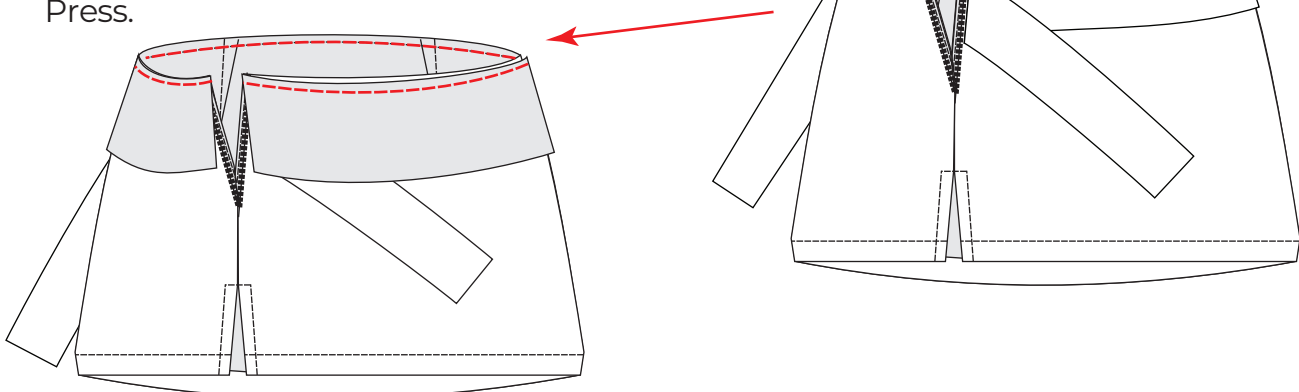




# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side





Fabric Wrong Side



Highlight of current step


## Step 15:

Flip the facing away and make a topstitch on it at 2mm (1/16") from the previous seam taking the seam allowance. Press.

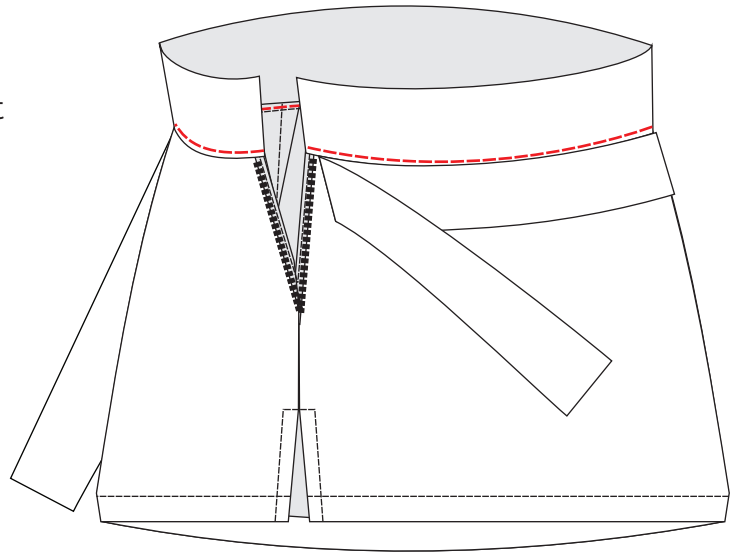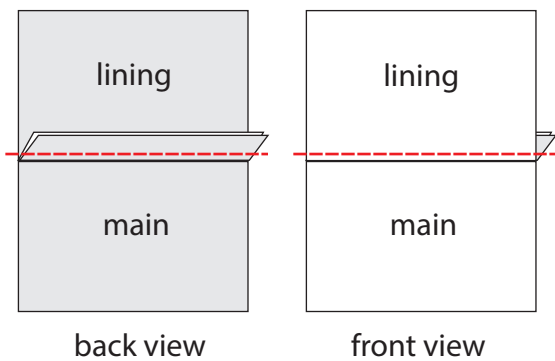

## Step 16:


Match the facing and the skirt with right sides of the fabric again and sew together at the zipper parts. Press.

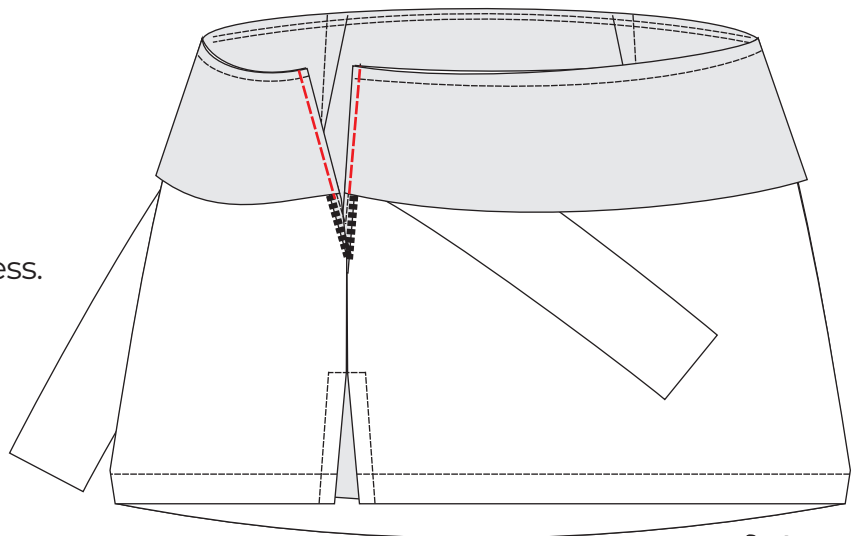

# Sewing Instructions

Note :


Seam allowance is 3/8" (1cm) unless otherwise stated



Fabric Right Side





Fabric Wrong Side



Highlight of current step

## Step 17:

Turn the facing to the wrong side and press carefully.  
Fasten the side bottom edges of the facing to the skirt side seam allowances.  
Steam the garment.

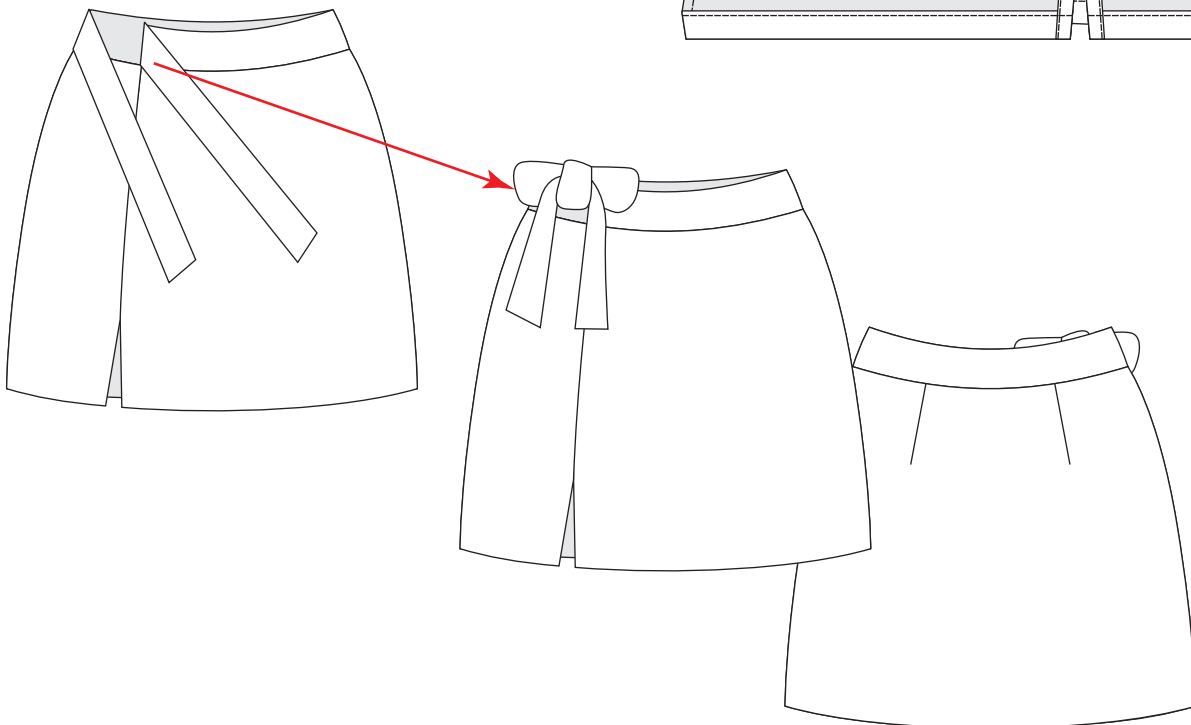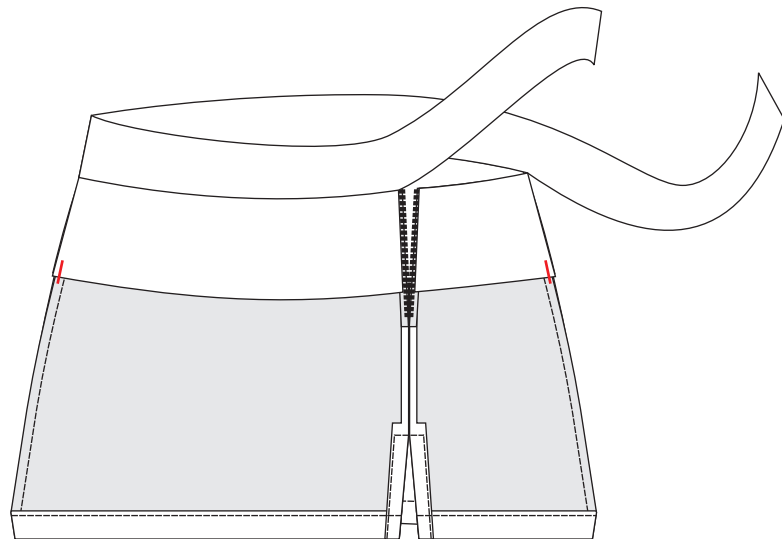

*Your skirt is ready!*

# FINAL LOOKS !

We hope you have had a lot of fun with this pattern. Do not forget to share your finished result on Instagram at

@patterncouture\_

for a chance to win a free sewing pattern.

