

Winnie Wrap Skirt



ILLUSTRATED TUTORIAL

SIZES: XXS - XXL

BEGINNER



Welcome!

Thank you so much for choosing our pattern!

Pattern Couture knows that there is something magical about choosing the perfect style , and creatively making your own clothes!

Our goal is to make beautiful patterns that all our clients will enjoy sewing and also feel very proud wearing!

Happy Sewing !

If you ever need any help or if you have any questions you can always write to us on etsy or on our e-mail address **help.patterns@gmail.com**

We wish you a wonderful day and a lot of fun with your sewing project.

Do not forget to share your finished project on Instagram and tag us **@patterncouture_** for a chance to win a free sewing pattern.

XO Katya & Tobias

Table of content

- 1 Welcome!
- 2 Table of content
- 3 About the pattern
Sewing supply list
- 4 Taking body measurements
- 5 Size chart
- 6 Fabric requirement
Fabric recommendations
- 7 Printing
- 8 Pattern layout/ assembly
- 9 Fabric cutting/ layout
- 10 Woven fabric tips
- 11-15 Sewing intructions
- 16 Final look


About the pattern

Meet the **Winnie** Wrap Skirt.
This skirt is an essential piece
in any fall wardrobe.

The skirt fits best with
medium weight woven fab-
rics with little to no elastane.

Our goal is to make patterns
for everyone that's why the
pattern comes in 7 sizes from
XXS - XXL.


Important: This pattern is
drafted for a woman of height
5'8" (1.72 m)

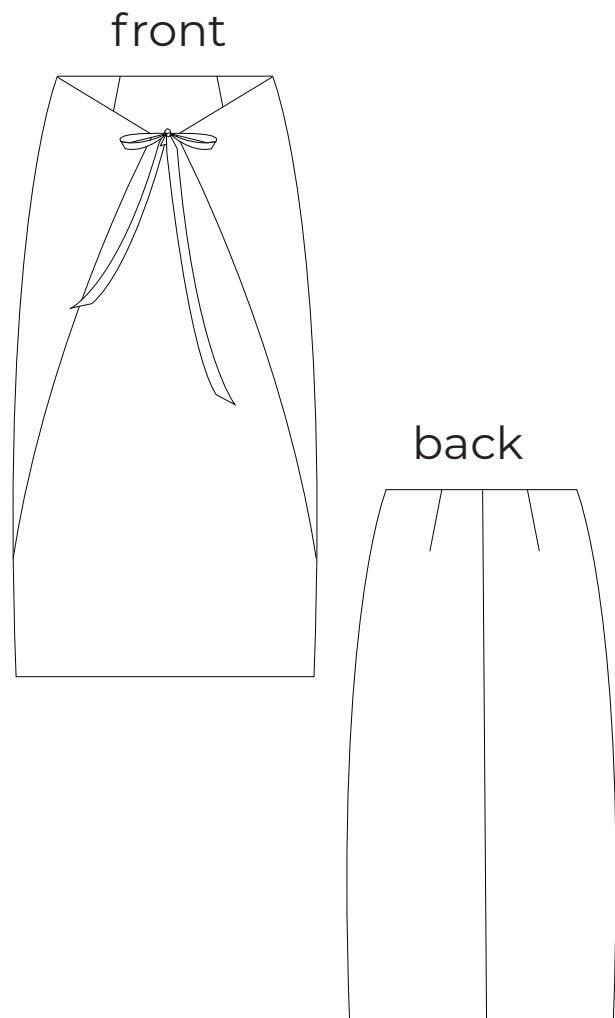

Sewing supplies checklist

- sewing machine
- printed pattern
- measuring tape
- tailor's chalk
- pins
- scissors
- invisible zipper in matching color 8" (20 cm) long



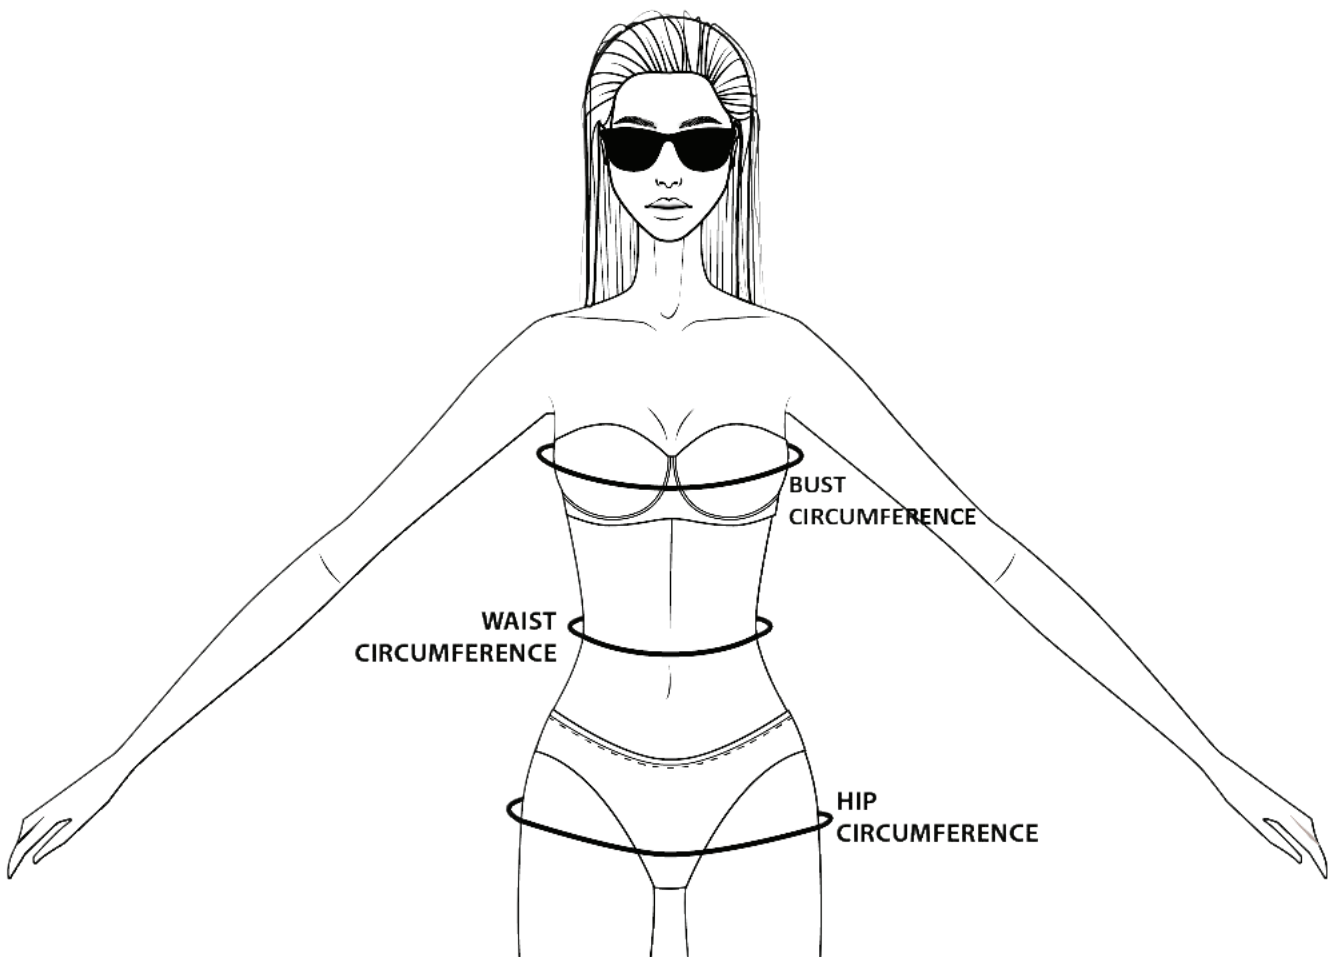

In order to pick the right size, you need to compare your measurements with the measurements from the size guide.

For top garments (dress, blazer, coats, tops..) base your size decision according to the Bust Circumference.

For bottom garments (skirts, pants, shorts...) base your size decision according to the Hip Circumference.

If your measurement fall between two sizes, you should pick the size which your measurement comes closest to. For example if your Bust size is 79cm or 31" choose XXS. If you fall exactly into the middle (+/-2) go to higher size for close fitting garments and to the smaller size for loose fitting garments.

IMPORTANT! In case you fall into one size according to your B measurement (for example 36) and a different size according to your W and H measurements (for example 40), then you'll have to adjust the pattern at the waist and hip lines.

Choosing your size

ATTENTION!

Our brand uses **different size charts** for different patterns.

Make sure to **check your size** for each project. Also do not rely on the ready to wear garment size you buy in shops.

How to measure your size:

The best thing you can do is to get a friend or a family member to help you.

The measurements should be taken in the same Underwear / undergarments in which you will wear the garment.



Size chart

The following 3 measurements are required: **Bust and Waist.**

The measurements of the Bust and the Hip should be taken in the most protruding part of the body. The measurement tape should be taut but it shouldn't deform your body. If you can still put a finger between the measurements tape you are good.

This pattern is drafted for a woman of height 5'8" (1.72 m)

SIZE /CM	XXS	XS	S	M	L	XL	XXL
BUST	78	82	86	90	94	98	102
WAIST	60	64	68	72	76	80	84
HIP	90	94	98	102	106	110	114
SIZE /INCHES	XXS	XS	S	M	L	XL	XXL
BUST	30.75	30.25	34	35.5	37	38.6	40.25
WAIST	23.6	25.25	26.75	28.25	30	31.5	33
HIP	35.5	37	38.6	40.25	41.75	43.25	45

Fabric requirements

							MAIN FABRIC
FABRIC WIDTH	XXS	XS	S	M	L	XL	XXL
60" (YARDS)	1.6	1.6	1.6	1.9	1.9	1.9	1.9
1.5 m (METRES)	1.5	1.5	1.5	1.7	1.7	1.7	1.7

Recommended Fabrics

This pattern is best suited for medium weight fabrics such as cotton, twill, linen, poly suiting etc.

We do not recommend light or heavy weight woven and stretchy knit materials



Most natural fibers shrink in the wash, be sure to have enough fabric in case of shrinkage.

The fabric requirements assume that the fabric is already pre-shrunk.

Before we cut the patterns on the fabric, you should try to get as much shrinkage out as possible (wash, steam, iron, dry). Natural materials usually need a lot of steam to shrink the material.

It is better to shrink it now than after cutting as your garment will not be the correct size.

Also, buy 5% more fabric in case of shrinking.

Also check to make sure the grainline of your fabric has not been distorted.

Printing instructions



Let us print out the pattern.

There are 3 options on how to print out the pattern:

A4 or US-Letter size - these are tiled versions which you can print out at home on your desktop printer.

A0 size - you can go to a **copy shop** and print it on a big scale. The nice thing is that it saves you the time of sticking the pieces together.


Printing checklist

- select your layers
- enter print pages
- orientation set to auto
- set scale to 100%
- print the test page
- check your scale

Two test squares are provided to help ensure your pattern prints in the right size. Depending on the test square you measured, it should be either 5cm x 5cm or 2" x 2".

If it has the wrong measurement, check your printer settings and try again.

NOTE : The pattern will not sew in the correct size if the Test Square does not measure correctly.

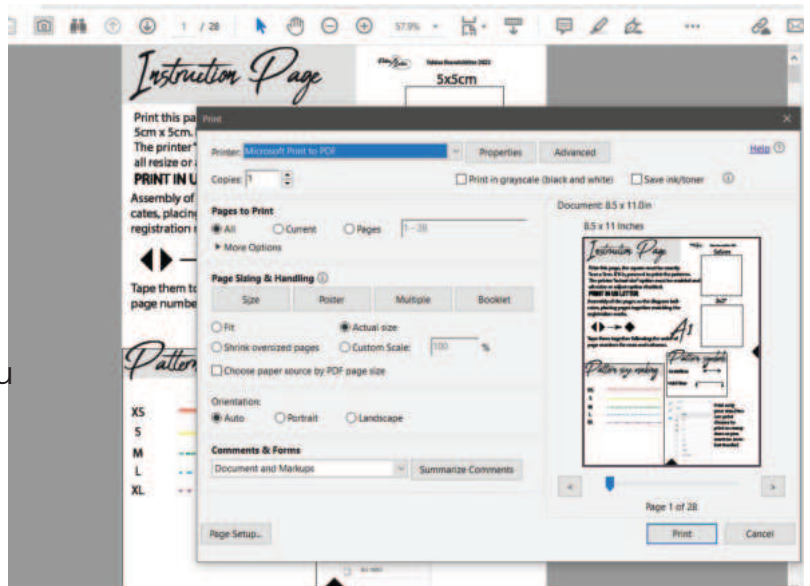

IMPORTANT:

Do not open or print the pattern in Microsoft Word.


In order to print this pattern you need the Adobe Acrobat Reader software. This software is available for free download on the internet.

Pattern layout


See the image below which shows how each sheet of paper will be placed. Use the corner marks to align each paper next to each other. Stick the sheets together using the number on the pages and the layout below as a guide.

PATTERN ASSEMBLY VIDEO

<https://youtu.be/cOW1K41QOBQ>

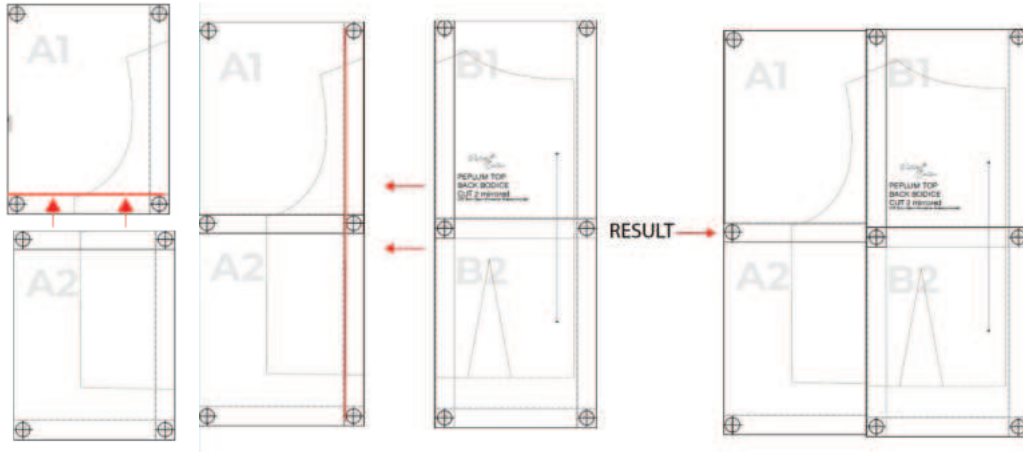

US letter & A4 Layout:

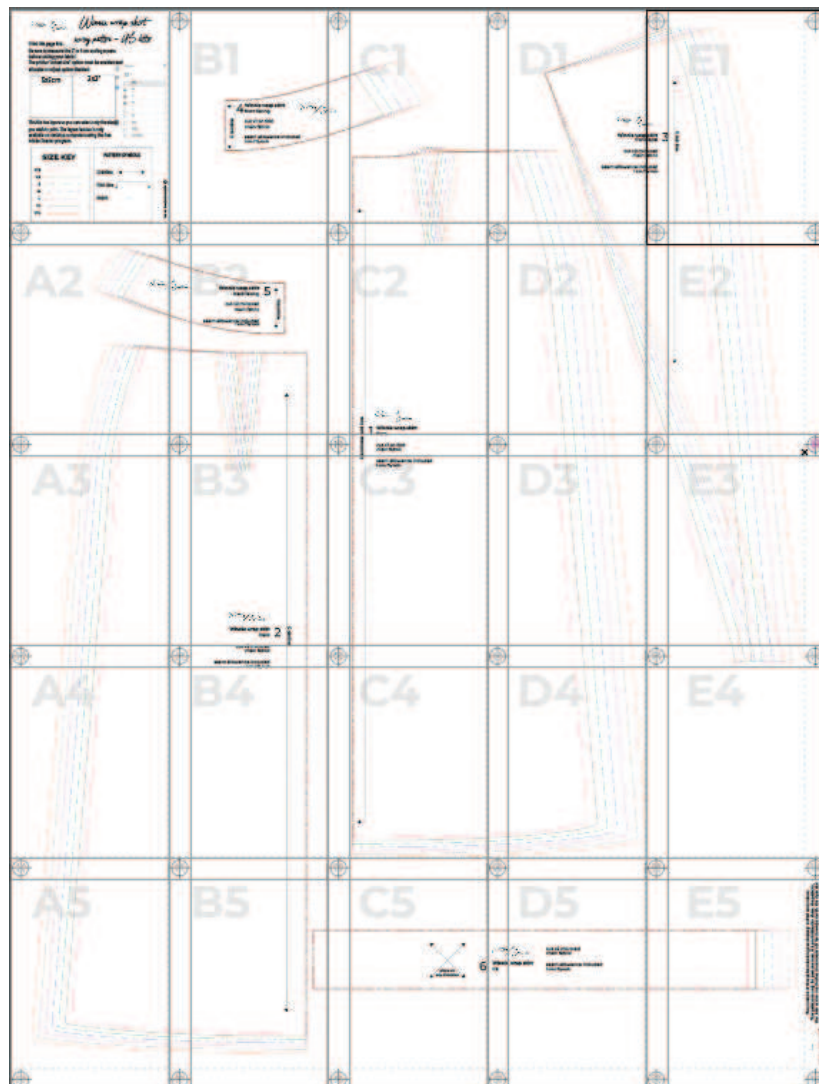


Fabric cutting instructions

MAIN FABRIC		
#	PATTERN PIECE NAME	CUT
1	Front	1 on fold
2	Back	2 mirrored
3	Front lapel	2 mirrored
4	Front facing	1 on fold
5	Back facing	2 mirrored
6	Tie	2 mirrored

Note: seam allowance is 3/8" (1 cm) unless otherwise stated

Fabric layout

main fabric on fold

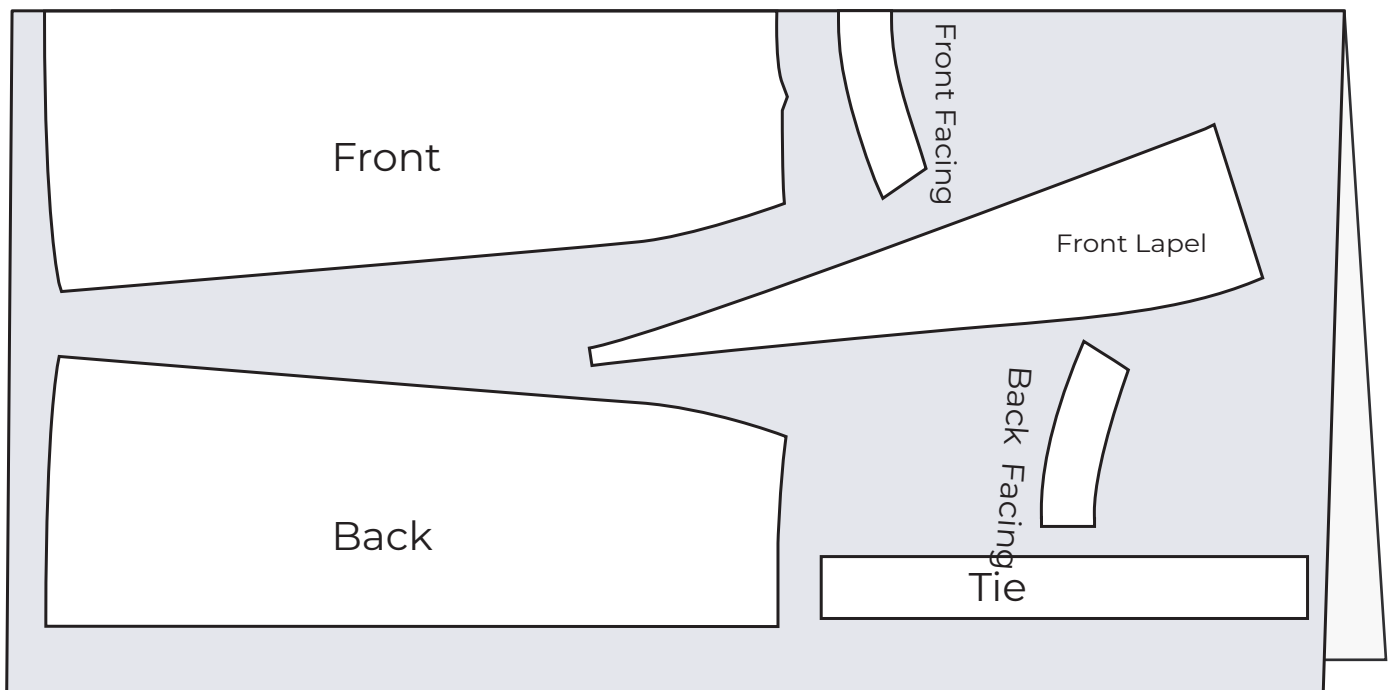

Important: do not forget to add all the notches & pattern markings to the wrong side of the fabric, including the mirrored sides

Tips and tricks when sewing with woven (non-stretch) fabrics

Choose the Right Needle:

Use a universal or sharp needle for most woven fabrics.

For heavyweight fabrics like denim or canvas, consider using a jeans/denim needle.

Select the Right Thread:

Choose a good quality, all-purpose polyester or cotton thread for most woven fabrics.

Match the thread color to your fabric for a more polished look.

Prewash Your Fabric:

Pre-wash your fabric to prevent shrinkage after your garment is completed.

This is especially important if your final garment will be washed.

Use the Right Stitch Length:

For most woven fabrics, a stitch length of 2.5 to 3.0 mm works well.

Adjust the length based on the weight of the fabric.

Finish Raw Edges:

Serge, zigzag, or use pinking shears to finish raw edges and prevent fraying.

Alternatively, you can use French seams for a neat finish on lightweight fabrics.

Press as You Go:

Press your seams as you sew. Use a hot iron and steam to set the stitches and create crisp seams.

Grainline Matters:

Pay attention to the grainline of your fabric. Cut pieces on the straight grain unless the pattern indicates otherwise.

Staystitch Curves:

Staystitching helps stabilize curves and prevents stretching.

Stitch along the seam line within the seam allowance.

Use Interfacing:

For areas that need extra stability, like collars and cuffs, use interfacing. It prevents these areas from becoming too limp.

Mark Your Fabric:

Use tailor's chalk, disappearing ink pens, or tailor's tacks to mark darts, notches, and other important points accurately.

Clip Curves and Notches:

Clip into seam allowances on curves to help the fabric lay flat. Make small notches at the seam allowance for easier alignment.

Test on Scrap Fabric:

Always test your stitches and settings on a scrap piece of fabric before sewing the actual garment.

Understand Fabric Properties:


Different fabrics behave differently. Understand the properties of the fabric you're working with, such as its drape, weight, and stretch.

Practice Precision:

Be precise with your cutting, marking, and sewing. Accurate measurements and cuts lead to a more professional-looking garment.

Sewing instructions

Note: seam allowance is 3/8" (1 cm) unless otherwise stated



fabric right side





fabric wrong side



step highlight


Step1: Finishing the raw edges

- Overlock or zig-zag stitch the edges of **all** pattern pieces (only sample of front skirt shown) (1)

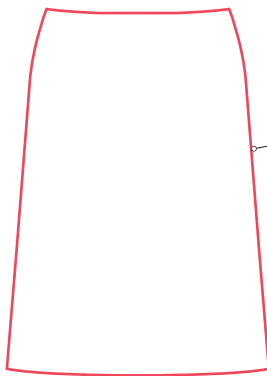

overlocker



or



zig-zag


Step 2: Front lapels

- Press straight edge (a) then top edge (b) seam allowance towards wrong side. Sew (1)
- Matching the sides, lay wrong side of front lapel on right side of front skirt, aligning raw edges and leaving a 3/8" (1cm) seam allowance of waistline. Set your sewing machint to the longest stitch and baste the layers together (2)
- Repeat for the Front Lapel and Side seam of Front Skirt

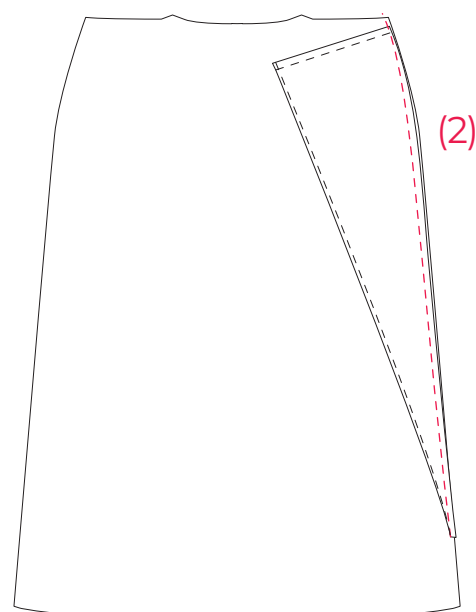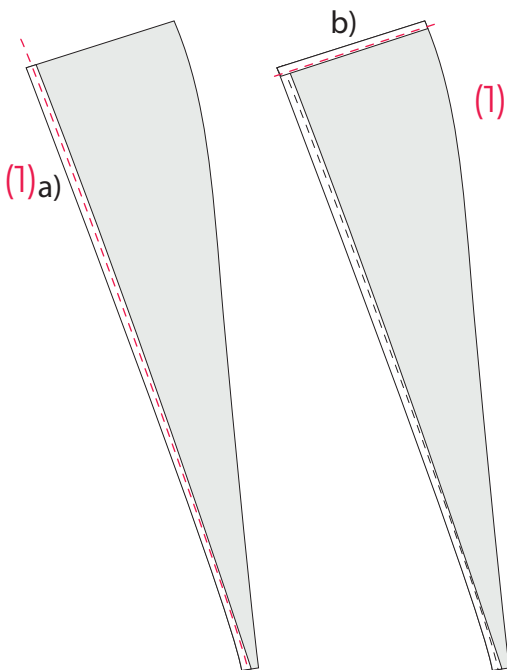

Sewing instructions

Note: seam allowance is 3/8" (1 cm) unless otherwise stated



fabric right side




fabric wrong side



step highlight


Step 3: Ties

- Fold tie lengthwise right sides together. Sew (1)
 - Turn right sides out. Fold 1/4" (0.6 cm) of one short edge inwards towards the wrong side. Press. Sew (2)
- Repeat for the other Tie.
- Pin ties on corner of Front lapels wrong side. Sew (3)

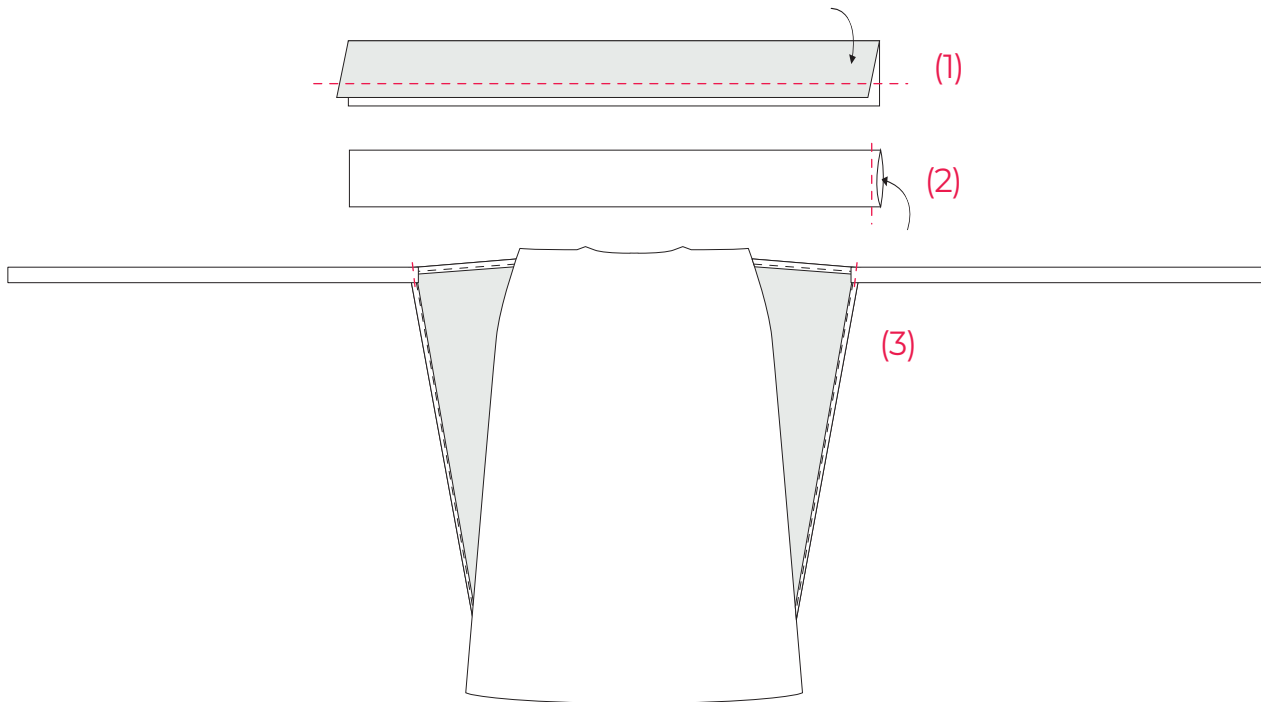


Step 4: Facing

- Lay back facing pieces on front facing pieces, right sides together, matching at short sides. Pin and Sew (1)
- Press open the seam allowances (2)

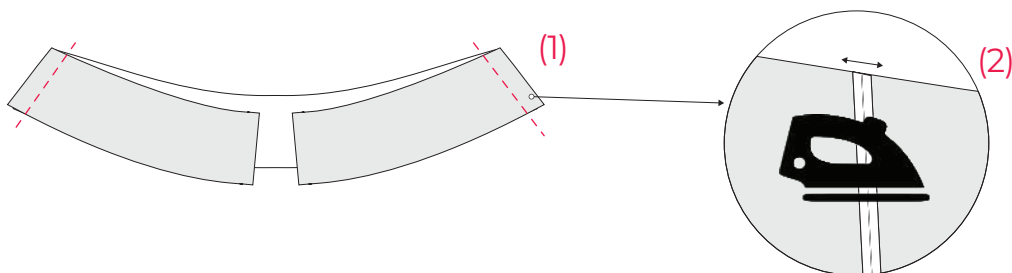

Sewing instructions

Note: seam allowance is 3/8" (1 cm) unless otherwise stated



fabric right side




fabric wrong side




step highlight

Step 5: Darts

- With right sides together, fold the fabric right sides together along the dart legs from the wide end to the tip. Pin along the dart line to keep the fabric in place. Sew along the dart legs gradually tapering down to the tip of the dart. (1)
 - Press darts towards side seams (2)
- Repeat for all darts on the Front and Back pieces

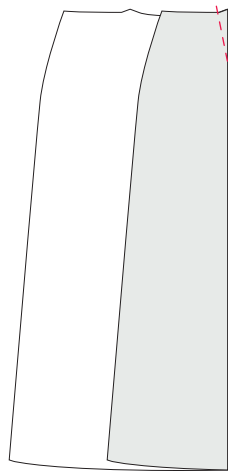


(1)

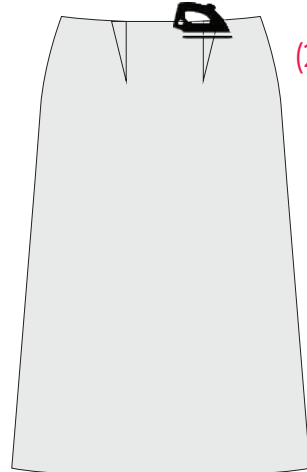


(2)

Step 6: Side seams

- Lay Back skirt on Front skirt, right sides together, matching at side seams. Sew (1)
- Press open the seam allowances (2)

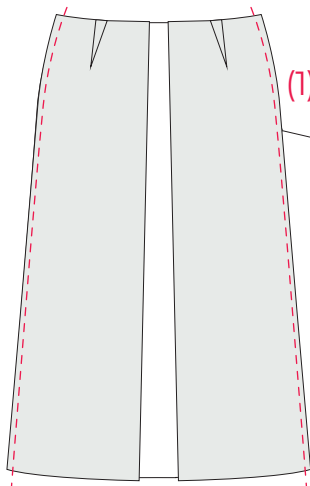


(1)

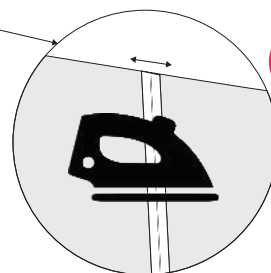

(2)

Sewing instructions

Note: seam allowance is 3/8" (1 cm) unless otherwise stated



fabric right side



fabric wrong side




step highlight

Step 7: Back - invisible zipper


- Measure 3/8" (1 cm) from waist on center back seam. Make a mark or insert pin. (1)
 - Place the zipper along the center back seam, right side down. Align the zipper stop with the mark/pin. Pin the zipper in place, ensuring teeth are aligned with the seam. Open the zip and sew on one side of center back, right sides together (2)
- Repeat for other side

- Close the zip and pin center back seams of skirt right sides together, turning away the end of the zipper (3)
- Sew the remaining centre back seam from zipper to hem (4)


Here is a Youtube video to show how to sew an invisible zipper:
<https://youtu.be/cG8CSr1lkjA?si=bAb6jaaFywcGAKJf&t=139>

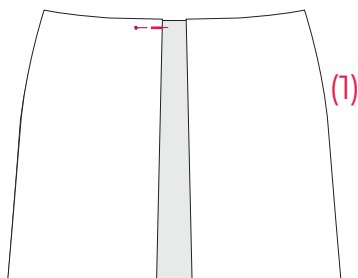


(1)

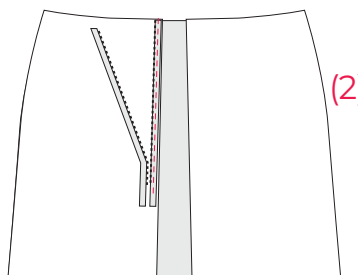

(2)

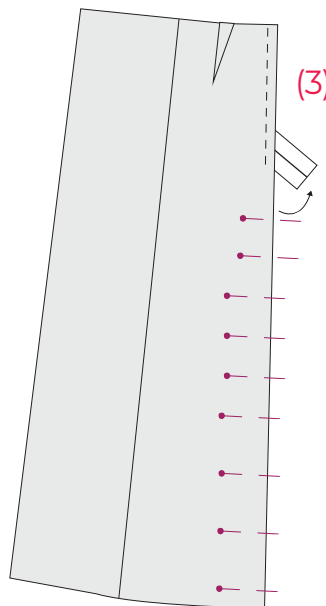


(3)

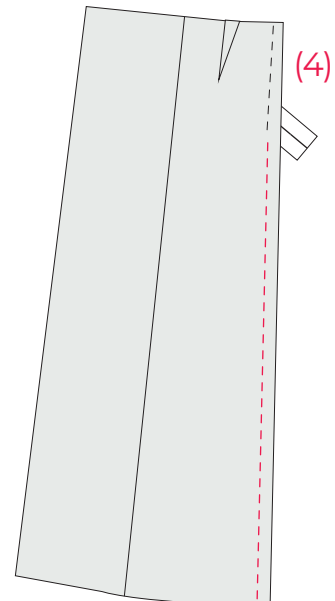

(4)

Sewing instructions

Note: seam allowance is 3/8" (1 cm) unless otherwise stated



fabric right side







fabric wrong side



step highlight

Step 8: Attaching the facing

- Pin facing to waistline, right sides together. Take care not to catch the front lapels
- Sew around edges, inclusive of the short ends of the facing. To sew the short ends of the facing, make sure to sew close to the zipper. (1)
- Clip the corners (2)
- Turn facing to the inside of the skirt (3)

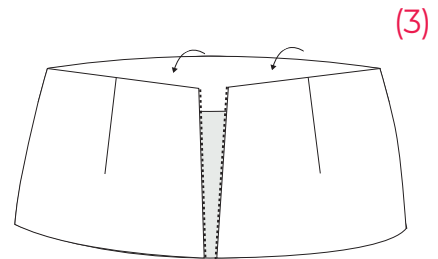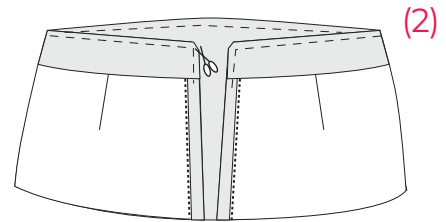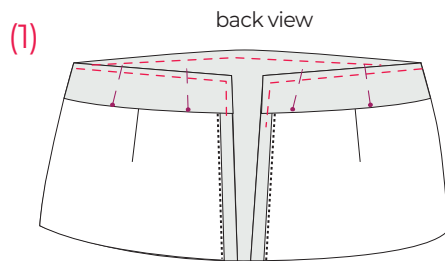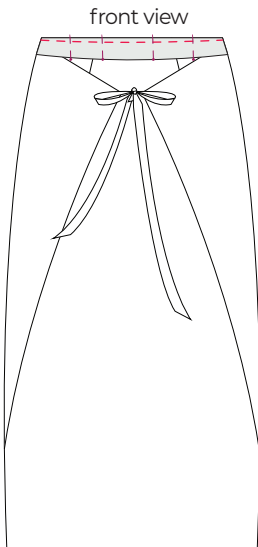

Step 9: Hem

- Fold hem seam allowance towards wrong side. Stitch (1)



Final look



We hope you have had a lot of fun with this pattern.

Do not forget to share your finished project on Instagram and tag us **@patterncouture_** for a chance to win a free sewing pattern!