RFR27 / GROUP 02 - EIGHT-CHANNEL TEMPERATURE MONITOR

Revision B | 2026-10-21 | 5 V / 16 MHz Nano | Schematic uses original CD74HC4067

CHANNEL 00



CHANNEL 01



CHANNEL 02



CHANNEL 03



CHANNEL 04



CHANNEL 05



CHANNEL 06



CHANNEL 07



MULTIPLEXER / ACQUISITION

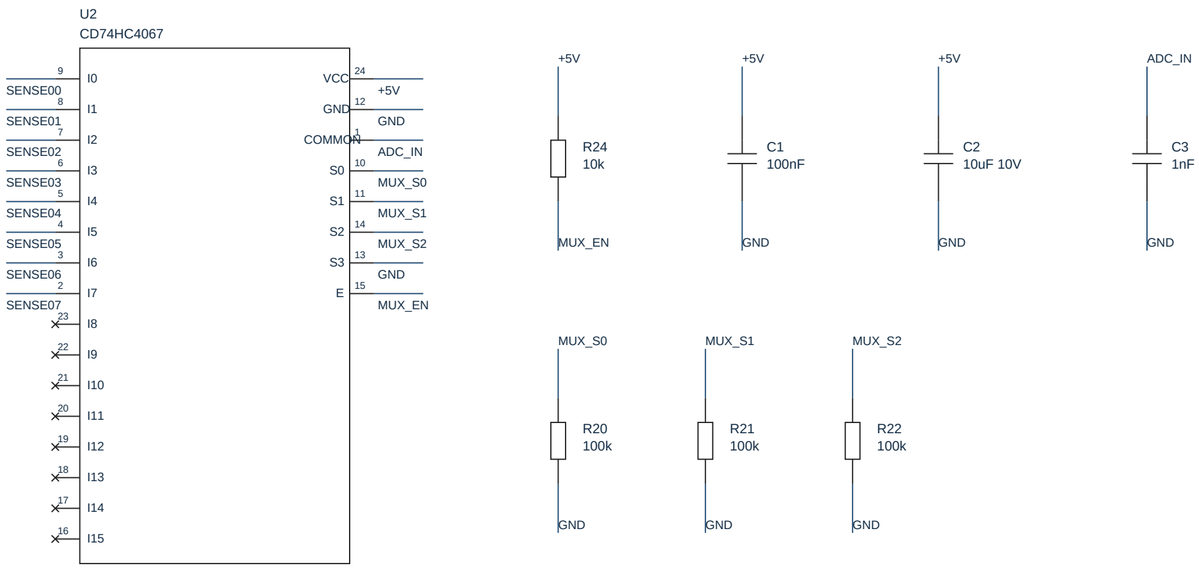

FAULT LED / I2C

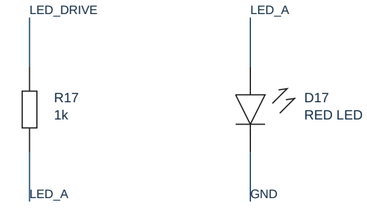

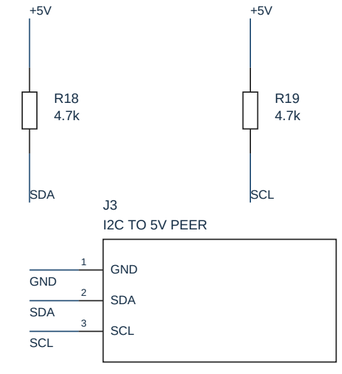

One effective pull-up pair per bus.
Use level translation for a 3.3V-only peer.

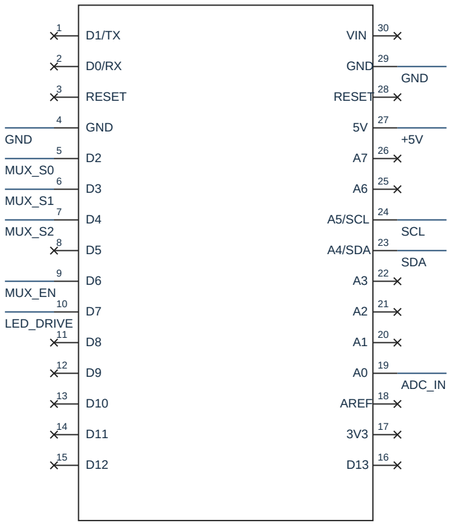

AREF: internal 1.1 V; do not tie to +5V.
Verify onboard AREF bypass; add 100nF if absent.
X = intentionally unused. Header pin numbers shown.

POWER / SELECT EXACTLY ONE SOURCE

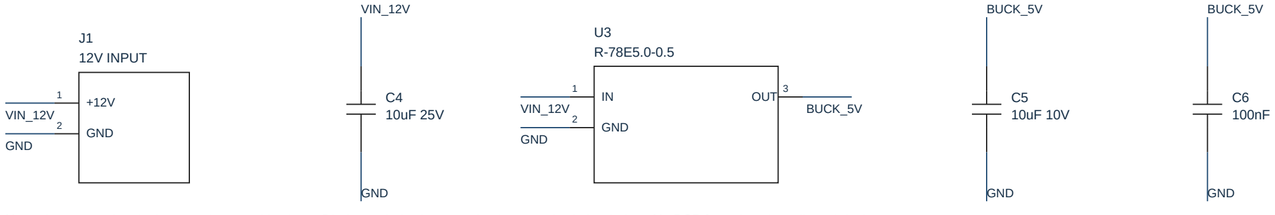

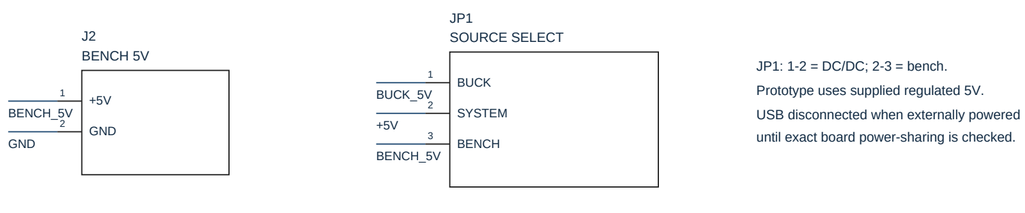

JP1: 1-2 = DC/DC; 2-3 = bench.
Prototype uses supplied regulated 5V.
USB disconnected when externally powered until exact board power-sharing is checked.

Named nets are electrical connections on this sheet. Diode symbols show anode above, cathode bar below. No PCB footprints: breadboard design.