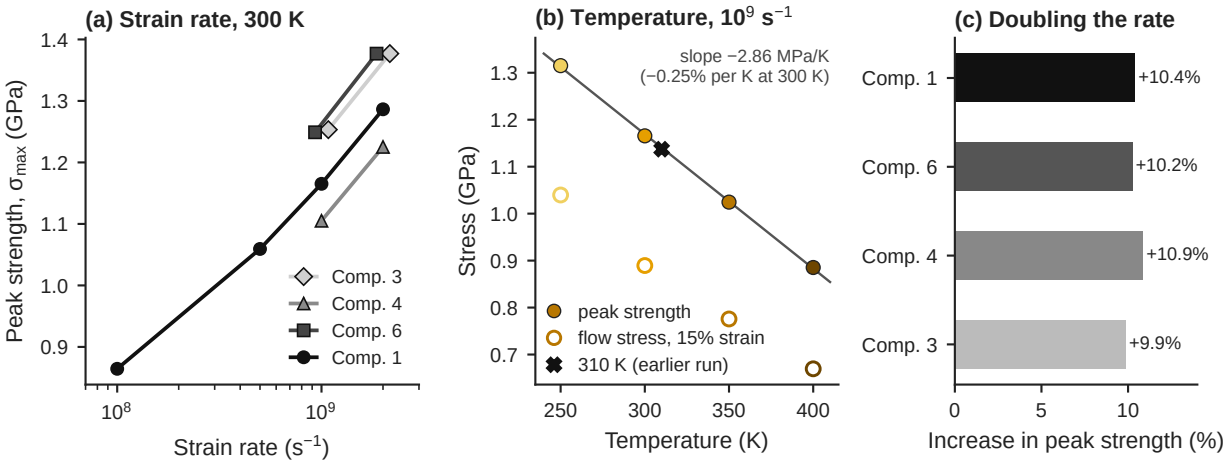
(a) Strain rate, 300 K
Peak strength, σ_{max} (GPa)
Strain rate (s^{-1})
Comp. 3
Comp. 4
Comp. 6
Comp. 1
(b) Temperature, 10^9 s^{-1}
slope −2.86 MPa/K
(−0.25% per K at 300 K)
Stress (GPa)
Temperature (K)
peak strength
flow stress, 15% strain
310 K (earlier run)
(c) Doubling the rate
Comp. 1
Comp. 6
Comp. 4
Comp. 3
+10.4%
+10.2%
+10.9%
+9.9%
Increase in peak strength (%)