BMI160 direct to ESP32-S3 - bench wiring

Sheet 1 of 2 - direct I2C, no multiplexer - 2026-10-21 - ESP32-S3 DevKitC-1 N16R8 - 100 kHz

DIRECT / 0x68-0x69

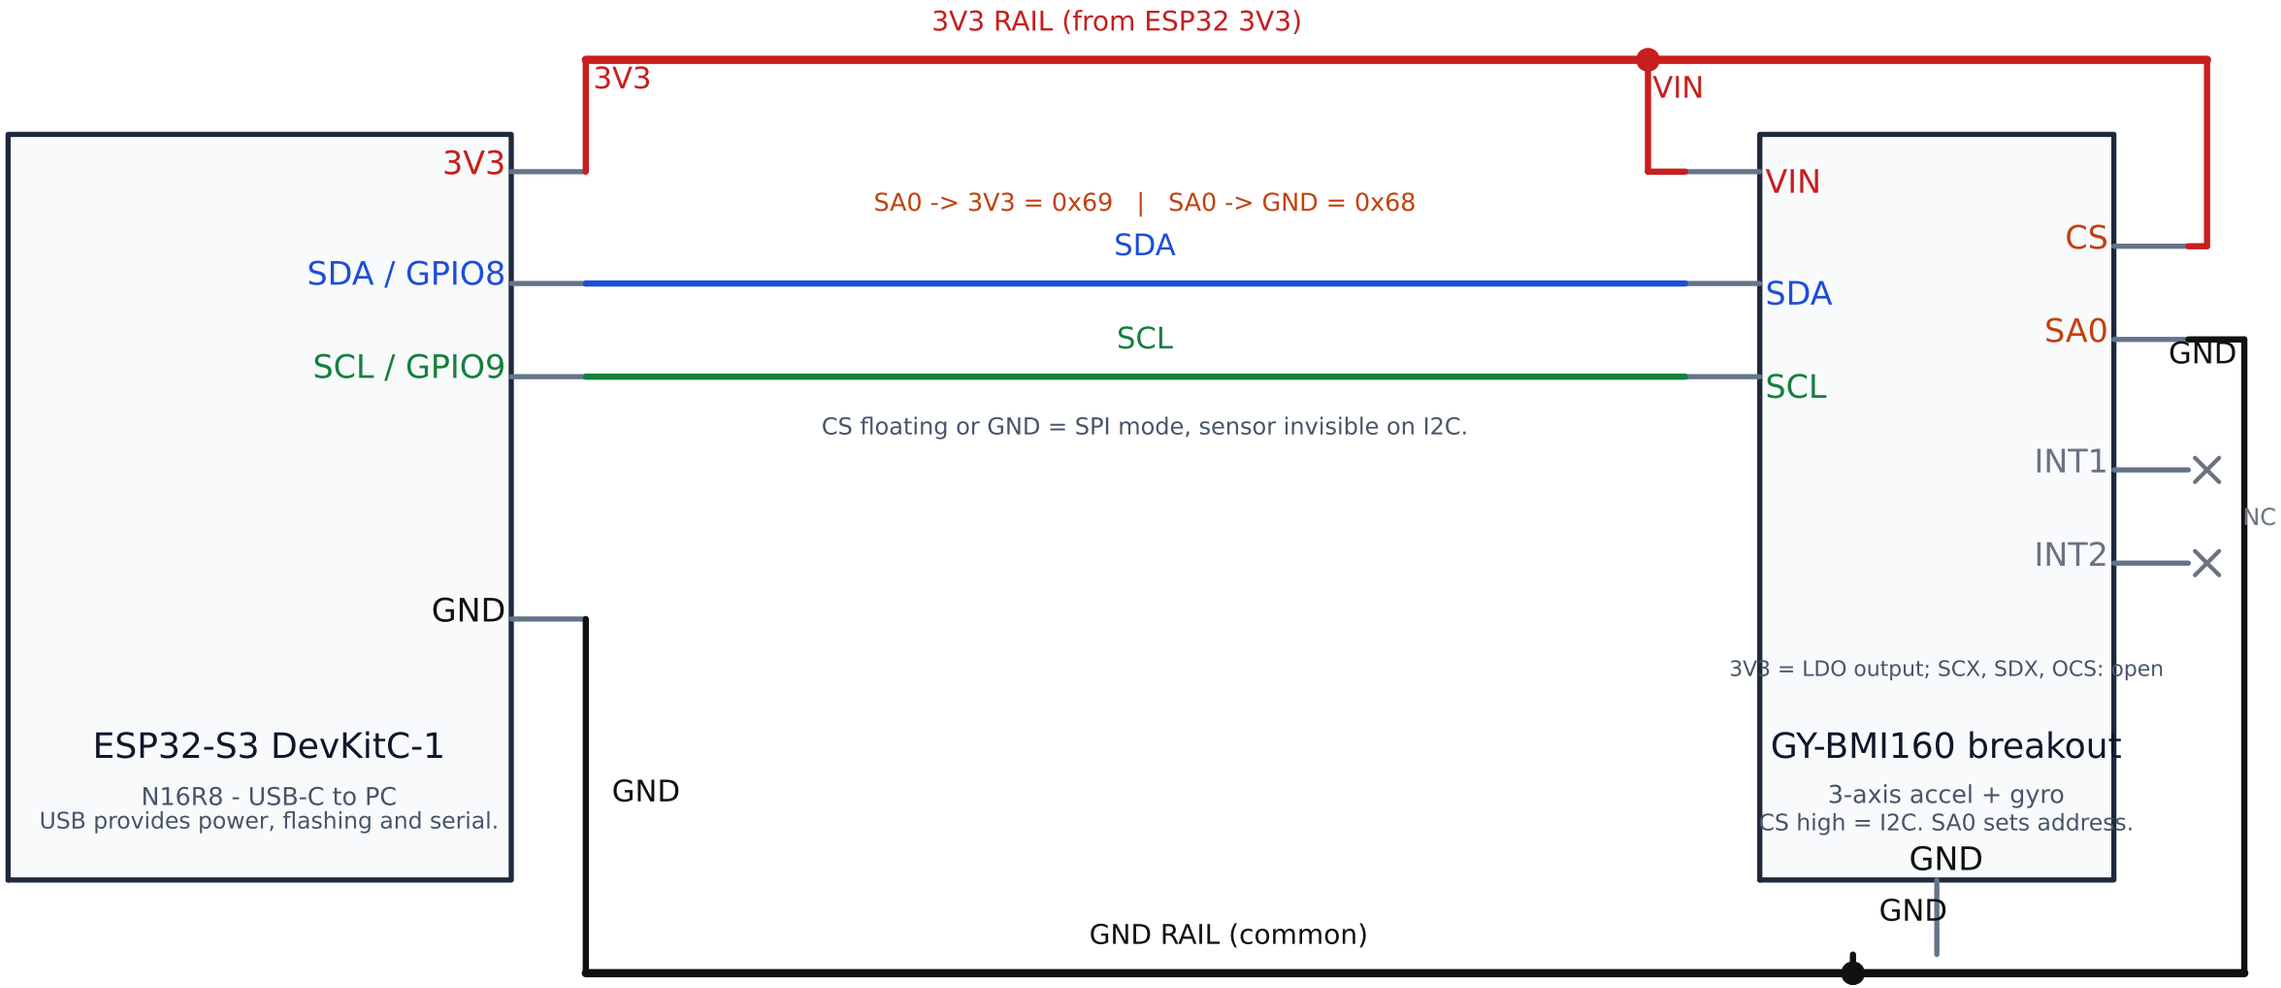

OPTIONAL - not needed for first power-up. Pull-ups: one pair on the bus only (already onboard).

BEFORE YOU POWER UP

SA0 -> 3V3: 0x69. SA0 -> GND: 0x68. Pick one, not both.

CS must be HIGH; otherwise the BMI160 speaks SPI.

Start at 100 kHz. 400 kHz only after stable reads.

INT1 / INT2: leave open (no wires).

This sheet is an ALTERNATIVE to the mux sheet.

USB connected? Verify 3V3-GND is NOT shorted before plugging in.

Unplug USB before changing wires. Direct and mux configurations are alternatives - never wire both.