

Requirements


- Linux OS

Installation


1. Clone the repo containing both the frontend and backend code
2. Create a DJI Cloud API application license.
3. Install [Node.js](#)
4. On the frontend app, open src/api/http/[config.ts](#) and change the appId, appKey, and appLicense values with the ones created in step 2.
5. Open the terminal and enter: `yarn install`
6. Install Java version 11
7. Install EMQX: <https://www.emqx.io/docs/en/v4.4/>
 - a. Once installed, open <http://localhost:18063>
 - b. Create an account or login to the dashboard
 - c. Go to the authentication tab on the left side (<http://localhost:18063/#/authentication>)
 - d. Create a built-in password database
 - e. Create a user within that database for the backend application to use
8. Install MySQL: <https://dev.mysql.com/doc/refman/8.0/en/installing.html>
9. Install Redis: <https://redis.io/docs/getting-started/>
10. Login to the MySQL database using the command: `mysql -u username -p`
11. Import the sql initialization file within the downloaded code: `source "path to cloud_sample.sql file"`
12. Update the backend configuration file with the following values:
 - a. mqtt - host: Enter the ip address of your computer where EMQX is installed
 - b. mqtt - username: Enter the username created for the user account on the mqtt dashboard
 - c. mqtt - password: Enter the password created for the user account on the mqtt dashboard
13. Launch both applications

Connecting to DJI Dock 2


1. Open the DJI Pilot 2 app
2. Switch the drone from the Mavic 3E/3T to the Matrice 3D Series (press the button within the red circle in the image below)

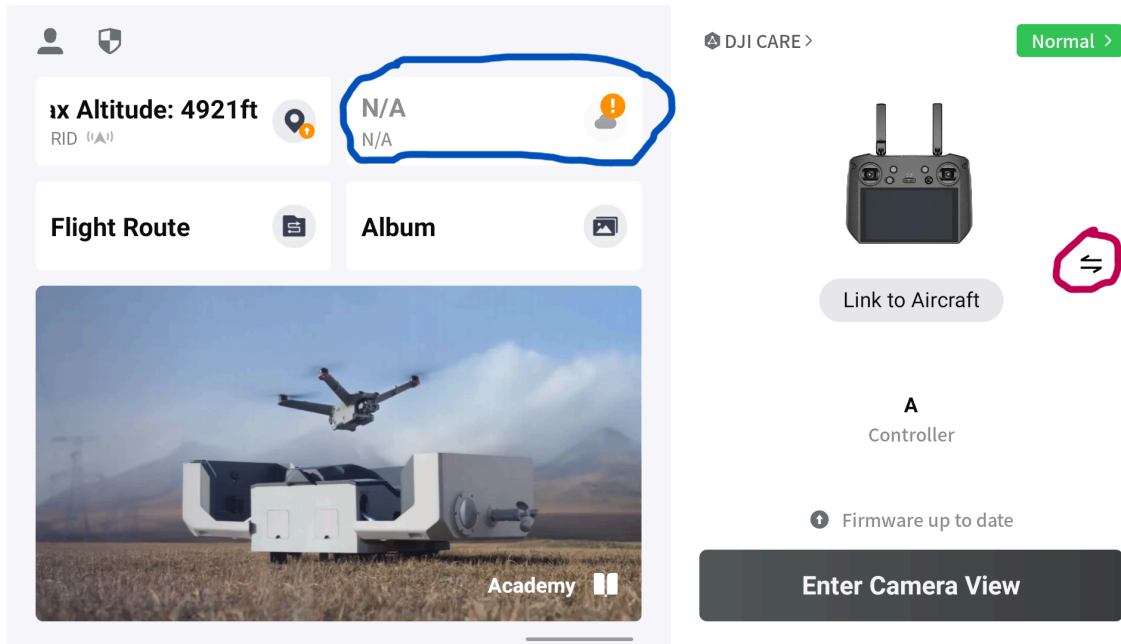

3. Once the device type is changed, press the button circled in blue in the image above.
4. Select Open Platforms from the top right of the screen.

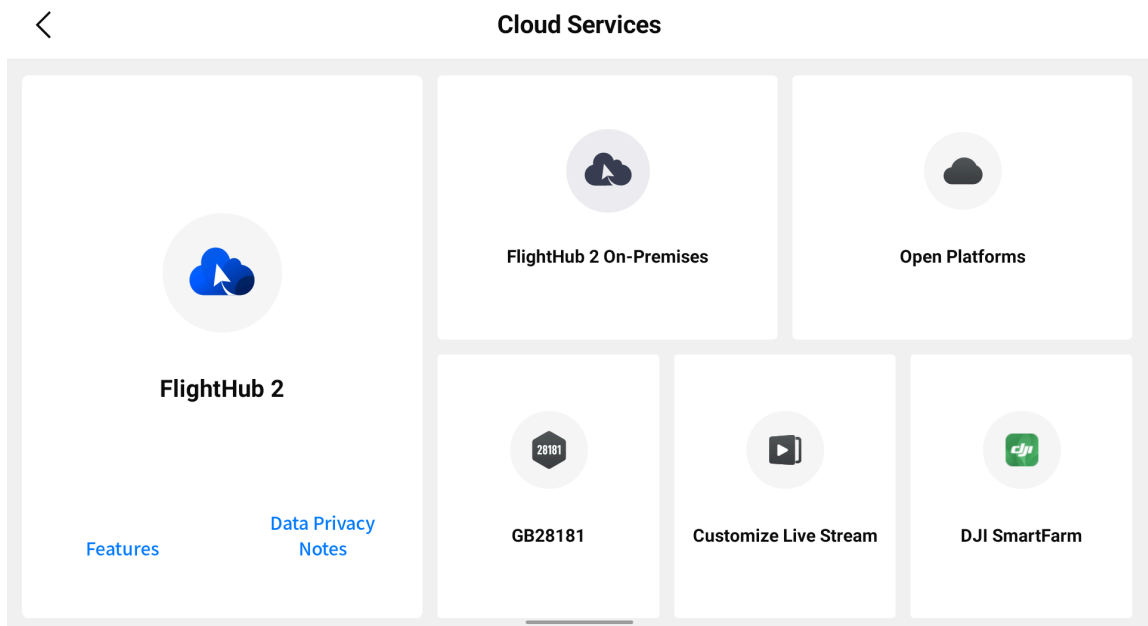

5. Select Third-Party Cloud Services from the dropdown and enter your frontend application address with the endpoint /pilot-login

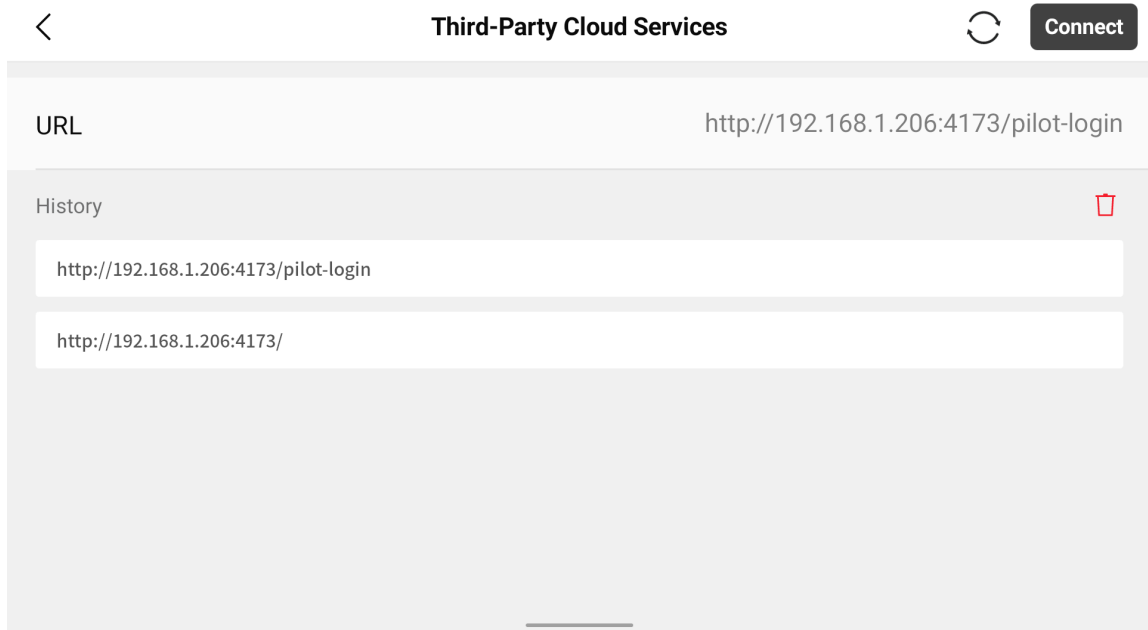

6. Return to the main screen of the pilot 2 app
7. Turn on the DJI Dock 2 and connect a DJI RC Pro Enterprise to the USB-A port inside the service panel of the DJI Dock 2.
8. Choose either reconfigure or press the warning if there is no backend connected.
9. Enter the MQTT server info (the locally installed one in the prior steps) and enter **W** for the Org ID and **qwe** for the binding code.
10. Drone Dock should now be paired and will be visible within the frontend web application.