


Berridge B-6 Panel

WALL, SOFFIT, CEILING AND FASCIA PANEL SYSTEM



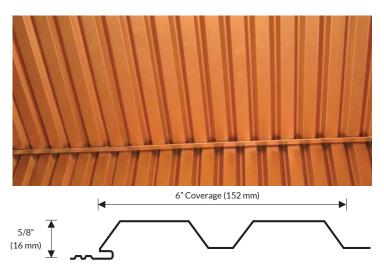

The Berridge B-6 Panel is a corrugated maintenance free, prefinished and extremely strong 6" wide panel with an extruded vee-groove appearance. This versatile panel is well-suited for wall, soffit, ceiling and fascia and can be installed over open framing or solid sheathing providing an extruded vee-groove patt

ttern.			

Materials -24 Gauge Steel

Specifications

-Berridge Fencing System -Fasteners: Concealed

-Coverage: 6" -Pattern: Extruded vee-groove

-Finishes: Smooth -Applications: Vertical over open framing or solid sheathing

Installation

- -Panel is available from the factory in continuous lengths to a maximum of 40'.
- -Panel may be used on curved walls but the panel itself does not curve.

Berridge B-6 Panel Panel Testing and Certification Summary Chart

Category

Performance

Characteristic

Uplift Resistance (steel only)

Test Method

ASTM E-330

Purpose Test method to determine structural performance under uniform static air

-176.5 PSF / +205.15 PSF allowable to 24 GA supports at 36" on center

Result

For further details please visit www.berridge.com