

KEY MATRIX -- 5 rows x 12 cols, 60 keys, col2row (COL -> switch -> diode anode, cathode -> ROW)




BACKLIGHT -- 60x SK6812MINI-E, reverse mount in the Choc v1 centre window, one chain, GRB

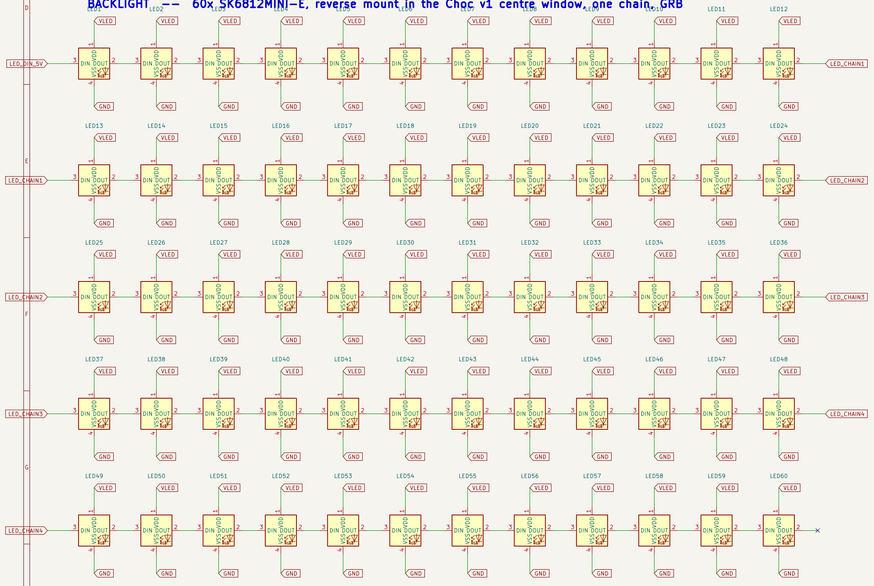


LED DECOUPLING -- one 0.1uF per LED, place each one at its LED on the PCB

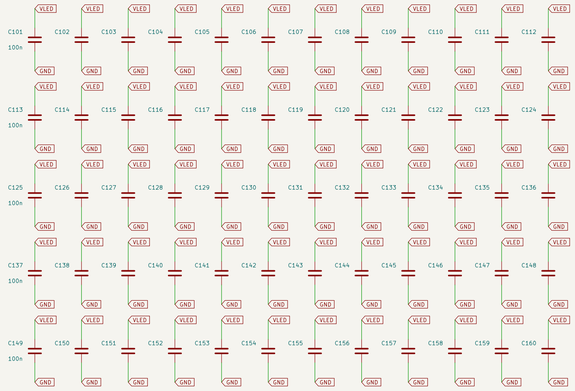


CONTROLLER -- nicenano v2, reverse mounted under the key field, USB at the back edge



BATTERY / POWER SWITCH / RESET / SWD

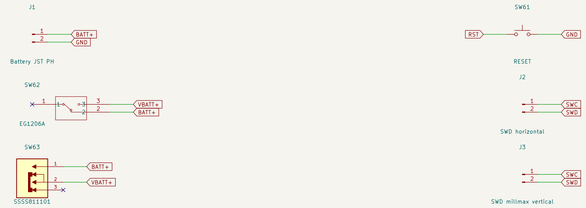

LED POWER -- VBATT+ -> Q1 hard cutoff -> U2 boost 5V -> U3 level shift -> LED chain. Q1/Q2/U2.EN all gated by VCC (ZMK ext_power).

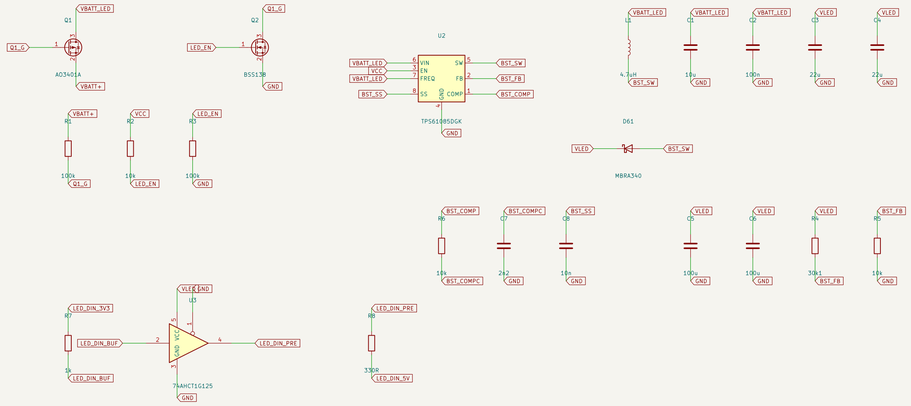

MOUNTING -- 6x M2.5



POWER FLAGS -- ERC only; not parts



Sheet: /	
File: order66-lp.kicad_sch	
Title:	
Size: A1	Date:
KiCad E.D.A. 10.0.6	**Rev:** Id: 1/1