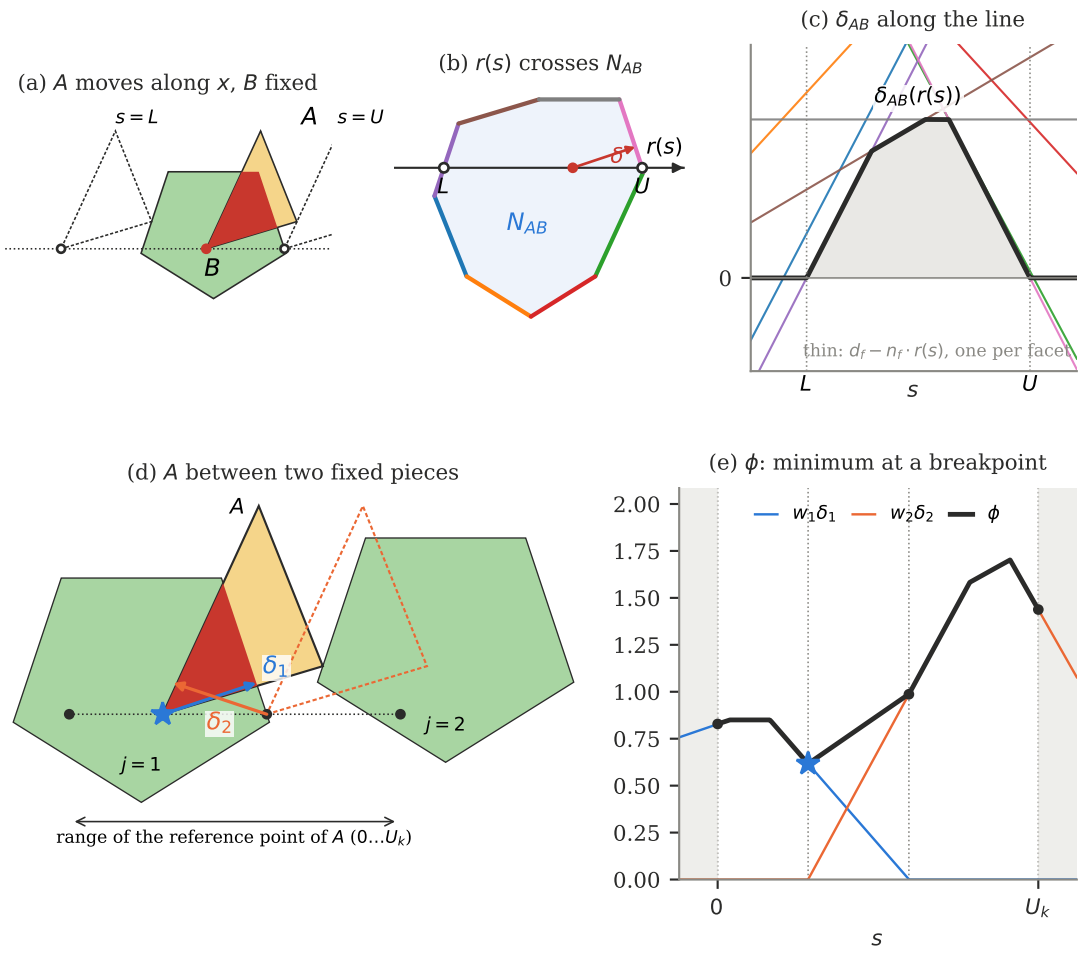
(a) A moves along x, B fixed
s = L
A
s = U
B
(b) r(s) crosses N_AB
r(s)
δ
L
U
N_AB
(c) δ_AB along the line
δ_AB(r(s))
0
thin: d_f − n_f · r(s), one per facet
L
s
U
(d) A between two fixed pieces
A
δ1
δ2
j = 1
j = 2
range of the reference point of A (0…U_k)
(e) ϕ: minimum at a breakpoint
w1δ1
w2δ2
ϕ
2.00
1.75
1.50
1.25
1.00
0.75
0.50
0.25
0.00
0
U_k
s