

Using Model-checking for precision spraying

Rim Saddem-Yagoubi^a, Author Two^c, Author 3^c, Karen Godary-Dejean^b, Didier Crestani^b

^aLIS, Aix-Marseille University, CNRS, 52 Av. Escadrille Normandie Niemen, Marseille, 13397, FRANCE

^bLIRMM UMR 5506 CNRS, Univ Montpellier, 161 rue Ada, Montpellier, 34392, FRANCE

^cDepartment One, Address One, City One, 00000, State One, Country One

Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Keywords: keyword one, keyword two

PACS: 0000, 1111

2000 MSC: 0000, 1111

1. Introduction

The current challenge for agriculture is to improve the quality and quantity of products while preserving the human health and the environment. One of the ways to meet this challenge is to use Precision Agriculture technologies. Precision agriculture has for origin the development of localization and sensing technologies by which site specific management can be implemented in the field, in order to optimize a given criterion, e.g. economical or environmental benefit Berk et al. (2016). Most recent technologies like multispectral imagery and laser scanning, whether airborne or from the ground, allow the acquisition of crop data with a high spatial resolution Rosell et al. (2009), Hall et al. (2003). On both arable and perennial crops, sensors can be used to quantify and map the dimensional and density characteristics of vegetation (Michaud et al. (2008)). This spatial information is an opportunity for automation specialists to develop innovative and efficient methods for accurate site specific agricultural action using variable rate application (VRA, Gil et al. (2007)) technologies (VRT). VRT enable optimisation of inputs (fertilizers, amendments, water, pesticides, etc) with regards to outputs (yield, quality of the product, quality of the environment, profits, etc).

Over the last two decades VRA as applied to spraying of crop protection products has received growing attention from scientists and seen the production of com-

mercial systems for various crops. This is the case for orchards and vineyards ?.

VRA as of today is mainly enacted according to two application principles. The first principle can be called 'real-time' or 'on-the-go' VRA. According to this principle, a measurement is done on the crop or on the soil and the rate of application of the agricultural input is modified in real-time according to a set of calculations. Most often, the measurement is a single measurement and the output of the control is also a single one: the rate of application of the agricultural input. The response of the crop on the location that receives the agricultural input is very slow with regards to the speed of the machinery and thus no feedback needs to be implemented on variable rate control. Thinking time on a discrete scale, the action of the machinery at $t + 1$ is not made on the same location as where action at t was made. Thus, in control science terminology, real-time VRA is most often single-input single-output open loop control

The second principle is VRA according to a recommendation or prescription map. In this case, the recommendation map is prepared according to geo-localized information previously acquired. Usually a map is calculated according to local variations of a given agromonomical attribute. So-called "decision rules" are applied. Most often, the quantitative decision rules are based on a linear model. The farmer may have access to parameters to tune the recommendation map and to editing features to override values on the map. Consid-

ering high resolution site specific action, one key element is often missing: the behaviour and precision of actuators. This has been recognized in works such as Roudier et al. (2011) in which the influence of spatial footprint of machinery and of uncertainty of actual output with regards to prescribed setpoint are highlighted. One key point is the time of reaction which influences spatial precision along the machine track Chan et al. (2004), depending on machine speed. Thus, reaction time and machine behaviour may hinder the proper application of recommendation map that would be solely based on characteristics of the vegetation. This is why one may think about an alternative approach to recommendation maps: maps with pre-calculated and geo-referenced control set-points. Such set-points may be calculated according to rules about vegetation and constraints of the sprayer. A control theory is available for providing such calculations for automated devices using numerical control. This is model-checking. The purpose of model-checking is to verify that a desired state can be reached and it can provide a sequence of set-points such that the desired state will be reached. Furthermore, using Cost Optimal Reachability Analysis (CORA), a sequence that is optimized according to a given cost can be provided.

In this paper, the possibility to use model-checking and CORA to compute an optimized control sequence for sprayers in a vineyard is investigated.

More specifically, considering the control dynamics of a sprayer and the possibility to acquire LiDAR data that characterise the vegetation before spraying, a precision agriculture oriented method that computes an optimal spray command sequence is proposed. The proposed method includes a specifically designed decomposition technique to leverage the combinatorial explosion issues that are commonly encountered when performing CORA calculations, and more generally model-checking. An assessment of this method based on LiDAR data acquired in vineyards in the south of France is provided.

This paper builds on previously published research Saddem et al. (2017) with new extensive explanations on modelling, new assessment based on full-scale field data, and a key algorithmic feature required to solve real-world agricultural problems with model-checking: a decomposition method. The outline of the paper is as follows. Section 2 describes the study context. Section 3 details the Automata Modelling for Precision Spraying (AMPS) method. Section 4 is devoted to the decomposition method. In Section 5, experimental results are described and discussed before concluding.

2. Background and study context

A short background on model-checking and tooling for cost optimal reachability analysis is provided in the beginning of this section. Details of the precision spraying problem to solve are then given. The proposed general methodology, named AMPS, is described in the following section.

2.1. Model-checking

The Model-Checking (MC) was introduced in the early 1980s Queille and Sifakis (1982), Clarke and Emerson (1981). It provides formal verification methods to ensure that the model of a system conforms to its specifications. It is usually used to analyze communications protocols Duflot et al. (2012) or industrial applications Clabaut et al. (2016), Pakonen et al. (2020), ?.

2.1.1. Model-checking phases

The model-checking process is based on 3 phases, namely modelling, specification and verification.

The formal modelling phase.

This phase consists in the formal modelling of the system behavior. It is mainly based on state machines. States are an abstraction of the status of the system, while the transitions represent events making the system switch from one state to another. For timed systems, temporal constraints can be added to the model. The most popular formalisms for timed systems modelling are Timed Automata (TA) Alur and Dill (1990) and Time Petri nets Berthomieu B. (1991).

The specification phase.

The specification phase consists in describing the expected system specification using properties. These properties are expressed in logical languages such as LTL (Linear Temporal Logic) or CTL (Computation Tree Logic) Baier and Katoen (2008). The properties defined for model checking Baier and Katoen (2008) are classically: invariants, safety, absence of deadlock, liveness, state (un)reachability.

The verification phase.

The verification phase consists in determining if the model satisfies the specified properties using a model-checking algorithm. First, the state graph containing all the possible reachable states is constructed. Then, this state space is explored checking the satisfaction

of the properties. Model checkers can record a diagnostic trace of the verification process along an execution path, from the initial state until the property is (un)satisfied. Tools for model-checking can be classified in four categories: code analysis model-checkers, probabilistic model-checkers, ordinary model-checkers and timed model-checkers. A large and detailed comparison of the performance of many formal verification environments in checking a safety property has been made in Mazzanti and Ferrari (2018) and has shown that UPPAAL is a tool of choice. UPPAAL¹ is a tool chain designed to validate systems modeled as networks of timed automata. It extends the TA formalism by adding integer variables, structured data types, user defined functions, and synchronization channels Bengtsson and Yi (2003). The model checker of UPPAAL allows to verify properties on the model of a system, analyzing its state space. TA and UPPAAL have already been used in the agricultural and ecosystem management domains (e.g in Dusseux et al. (2015), Largouët et al. (2012)).

Concurrently with the model-checking verification phase, an optimization process can be carried out using Cost Optimal Reachability Analysis.

2.1.2. *Model Checking and Cost Optimal Reachability Analysis (CORA)*

The notion of optimal cost is often used in scheduling and planning problems. Usually constraints programming or linear programming approaches are used to solve such problems. The AMETIST project Vaandrager (2006) proposed in 2006 to address these issues using model checking and to prove the practical applicability of model checking tools. CORA addresses the problem of finding the minimum cost to reach a goal state Behrmann et al. (2005). The CORA algorithm is based on the branch and bound concept. Depending on the chosen branching strategy, it may explore the entire state space to find, among the set of attainable paths, an optimal cost path. The idea of the branching strategy "*Minimum Cost order*" for reachability properties is to guide the exploration of the state space such that promising sets of states are visited first Behrmann et al. (2001). For a given state, a partial cost is evaluated. Then globally, the state having the lowest partial cost is explored first. If the obtained state achieves the goal of reachability, then the path found is optimal. The so-called Remaining feature can be used to reduce the

number of explored spaces and guide the exploration process Behrmann et al. (2004).

Basic MC algorithms do not include the ability to find an execution path that verifies at the same time a property and its optimality according to a cost criterion chosen by a user. A variant of UPPAAL called UPPAAL-CORA Behrmann et al. (2004) can provide a Cost Optimal Reachability Analysis (CORA). It has been successfully used for solving various scheduling and routing problems (Behrmann et al. (2004) including precision spraying Saddem et al. (2017) or harvest optimization problems (Saddem-Yagoubi et al. (2020), ?).

Since properties verification using model checking is based on state-space analysis, its main limitation concerns combinatorial explosion.

2.1.3. *Limit of Model Checking: The state space explosion problem*

State space explosion is a problem usually encountered during the verification phase of real systems. Its principal cause is the large size and the complexity of the model of the system to be verified. As MC enumerates exhaustively all the possible reachable states of a system, and stores them to verify properties, the combinatorial explosion affects both the time and space complexity of the verification algorithm. To deal with this problem, various techniques such as the reduction of the state space, the optimization of modelling, or the limitation of the state space explored during the verification step, have been proposed

The most popular techniques for the reduction of state space are: 1) the binary decision diagram which provides a symbolic representation of states allowing a more compact representation of the state space Burch et al. (1992); 2) the partial order methods which consist in eliminating as much as possible unnecessary interleaving between parallel processes when constructing the state space (Godefroid et al. (1996), Boucheneb and Barkaoui (2009)), and 3) the symmetry exploitation which is based on the exploitation of the structural symmetries of the system to build a reduced state space Hendriks et al. (2003).

For the optimization of modelling, the choice of abstractions and simplifications influences greatly the size of the state space. However, the simplified models must guarantee the correctness of the verification of the properties. This requires expertise in the semantics of the modelling language, of the modelling process as well as in the underlying verification technique.

So-called on-the-fly algorithms allow to verify some

¹<https://uppaal.org/>

properties without building the entire state space, reducing the time and the memory used during the verification process. This reduction is only effective for properties which do not require to explore the whole state space (like reachability ones). These algorithms are also useful to detect property violation (invariant, safety) since the first state that does not satisfy the property stops the verification process

This sub-section summarised the basics of model checking and of the CORA techniques. Combinatorial explosion issues were pointed out as well as solutions to address them. The next section presents, in the context of precision agriculture, the Precision Spraying problem on which Model Checking, optimization cost analysis and combinatorial explosion limitation methods are applied on.

2.2. Detailed definition of the Precision Spraying Problem

Here is defined the spraying problem is defined: this includes the spraying hardware involved, the constraints that need to be defined to guarantee local quality of spraying, and the objective for optimisation.

2.2.1. Sprayer description

In this section, a brief overview on different types of existing sprayers available for widely-spaced (wide inter-rows) vines is given. The hypothetical digitally controlled sprayer considered for the study is then presented.

Presentation of a classic pneumatic sprayer. There are several types of sprayers that can be mounted on or trailed by a tractor: first treatment booms (having nozzles and no air assistance), airblast sprayers (nozzles mounted around a fan that generates the "airblast" that carries the droplet to canopy), pneumatic arches and pneumatic face to face sprayers, face to face sprayers with nozzles and air-assistance that can be turned off at early growth stages. Face to face sprayers can have recovery panels that recycle the spray that is not deposited in the canopy. In pneumatic sprayers, the air is used both to break the liquid into droplets and to carry the droplets obtained into the canopy. In figure 1 is presented an example of a pneumatic arch type sprayer. This sprayer has 4 spraying devices: a low hand (LH), a high hand (HH), a high cannon (HC) and a low cannon (LC). A "hand" is a spraying device comprising 2 or 3 nozzles, which will operate at the same time. When the sprayer is used, the hands spray on one side of the rows of vines adjacent to the sprayer. Cannons spray on distant rows of vines and can be arranged in various ways.

In the following, to simplify the modelling and descriptions, only the hands of the sprayer will be considered.

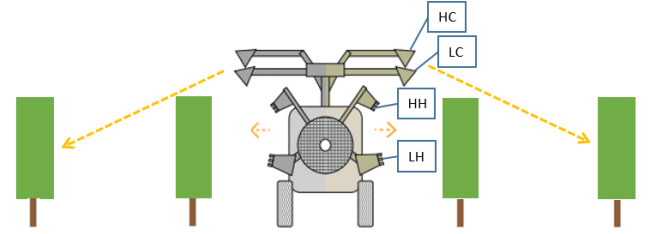


Figure 1: Schematic representation in back view of a 4-handed, 4-cannon pneumatic arch with a low hand (LH), a high hand (HH), a high cannon (HC) and a low cannon (LC)

Hypothetical automated sprayer description.

In general, pneumatic sprayers on the market do not have automatic mechanisms to independently close or open the spraying spouts in real time. The on-off switching of spouts is done manually. In the example given in 1, for example, both hands are typically used at the same time when vegetation is high enough. However, the automation of the control of individual spraying elements is essential for precision spraying. There are published examples of automated prototypes such as Gil et al. (2007), ?.

To provide an example for the precision spraying methodology proposed in this paper, a hypothetical sprayer that can switch on/off each of its hands independently is proposed. In order to provide a means to reduce the volume sprayed when vegetation is high but of a low foliage density, it is supposed that a third Central Hand, named CH, is added to the original Low Hand (LH) and High Hand (HH) (Figure 1). CH is supposed designed and set to that it can cover approximately the same crop height as LH and HH used together. Spraying with the central hand alone provides only half the volume that combined LH and HH provide. Indeed, each hand is supposed to have the same flow rate, which is half the nominal flow rate (the nominal flow means a full dose of the product). The vertical position of each hand on the sprayer, its inclination, as well as its lateral distance from the vegetation define the height of vegetation it covers. One important aspect in the hypothetical sprayer considered is that opening and closing each hand takes some time.

In the rest of this article, for the sake of simplicity and genericity, we will call each "hand" of sprayer a "noz-

zle”, even if a ”hand” actually comprises several spray sources operating simultaneously. Generally speaking, the principle proposed here is that redundant nozzles can be used to provide both adequate spray targeting as well as dose management. This principle can be applied to many types of sprayers. By redundant nozzles, it is meant that sprays of these nozzles may overlap in the height portion of the vegetation they cover.

2.2.2. Precision Spraying Problem and constraints: A comprehensive definition

The Precision Spraying Problem consists in verifying the aptitude of an agricultural sprayer to respect the constraints of the task while, at the same time, providing an optimal sequence of sprayer commands.

Spraying constraints can be classified into two categories: 1) Sprayer Constraints related to the dynamics of the agricultural machine, and 2) Agronomic Constraints which are related to requirements on precision spraying behaviour. In the context of the study, Sprayer Constraints (SC) are the speed of the sprayer (1.4 m s⁻¹), the number of nozzles (3), the orientation of the nozzles, the opening time of the nozzles (0.2 s) and the closing time of the nozzles (0.2 s). Agronomic Constraints (AC) are about spraying enough and with adequate vegetation targeting to protect each plant from disease. In this paper, AC rely on a Precision Spraying Mapping that stipulates which nozzles to use according to vegetation profile. This mapping is defined in section 3. Because it takes time to open and close valves, one rule is added to AC: when a new setpoint is required for the set of nozzles, the required nozzles should always be opened before closing the ones to shut down. The agro-environmental objective is to minimize the total quantity of plant protection products sprayed in a field while respecting SC and AC.

More precisely, given a grapevine crop organized in rows, the objective of the Precision Spraying Problem (PSP) is to find a sequence of sprayer commands that sprays the entire crop while respecting all spraying constraints (SC and AC) and minimizing the total quantity of sprayed product.

To resolve PSP, a method called Automata Modelling for Precision Spraying (AMPS) has been designed. It is described in the next section.

3. The AMPS methodology

This section presents the AMPS method for precision spraying.

3.1. General description of AMPS

The AMPS method takes 2D ground-based LiDAR data of the canopy as input. It then computes, for a given sprayer with individual control of nozzles, a command sequence optimized for a cost criterion while ensuring a sufficient protection on each vine plant. The flow rate and the response time for opening or closing the nozzles are parameters taken into account in the modelling as they will affect the choice of the most appropriate command for the sprayer.

AMPS is based on 3 steps, represented in figure 2:

- Step 1:** Define a static correspondence function between the vegetation density and the spray commands. This function, called ”Precision Spraying Mapping (PSM)”, maps each possible vegetation state to two spray commands: the most suitable command C_{best} , and an alternative acceptable command C_{alt} . These two commands guarantee sufficient protection for each vine plant. This step is based on human expertise about spraying and crop protection. The PSM may be tailored according to grower’s expertise without changing the essence of the AMPS method
- Step 2:** Apply a data processing algorithm to raw LiDAR data from scans of vine rows. This algorithm produces for each row a spatialised recommendation map (SRM). First, the algorithm uses aggregation and filtering rules to form blocks of vegetation which have a uniform enough vegetation density. The length of each block can vary from one block to another, with a minimum length that is consistent with nozzles response times. The algorithm uses the PSM function to assign to each vegetation block of the targeted vine the appropriate spray commands (C_{best} and C_{alt}).
- Step 3:** Step 3 is the core of AMPS methodology. Based on formal methods (model checking with CORA), it produces a spraying command map, with, for each identified vegetation block, its treatment time and the selected spray command (named C_{opt}). The SRM obtained in step 2 is input data of the PTA_AMPS model presented in section 3.4.1. PTA_AMPS models the set of the spraying operation and the dynamics of the sprayer. This model is used to compute the optimal command sequence to spray a row with a minimum quantity of product.

In the following, each step of the AMPS methodology is detailed and illustrated on a vineyard case study.

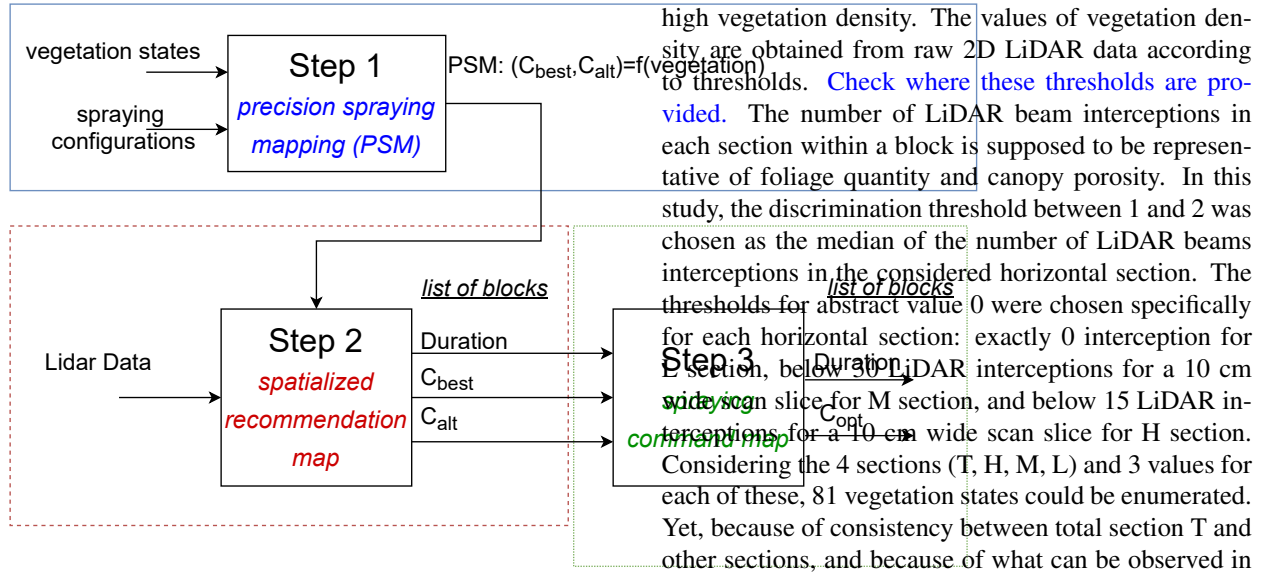


Figure 2: AMPS Method

3.2. Step 1: The Precision Spraying Mapping

In order to build the Precision Spraying Mapping (PSM), Step 1 takes as input the different possible states of vegetation and the different possible commands of the sprayer. As an output, it generates a set of spray commands that are compatible with each possible state of vegetation. In this work, 2 alternative commands are considered, one being considered as the best.

3.2.1. Vegetation characterisation

A state of vegetation is described by a set of qualitative values which characterises its spatial density. Each vegetation block is considered homogeneous in its characteristics, which are defined according to its height.

Each vegetation block is divided into 3 horizontal sections depending on the height. The very low area, which mainly consists in trunk and weeds or grass, is not considered for spraying. Then we consider a "Low" (L) and a "Middle" (M) sections, and finally the "High" (H) section for the higher canopy. The total height (T) is also considered as a section such that $T=L+M+H$. REVOIR LES VALEURS APRES EDITION RESULTATS In our example, the thresholds to separate the height sections were respectively set to 0.3, 0.6 and 1.2 m and the maximum vine height was set to 2 m.

Thus, a vegetation state is represented as a quadruplet T-L-M-H of density values. 3 qualitative density values are considered: 0, 1, 2, which respectively represent absence of vegetation, low vegetation density, and

high vegetation density. The values of vegetation density are obtained from raw 2D LiDAR data according to thresholds. Check where these thresholds are provided. The number of LiDAR beam interceptions in each section within a block is supposed to be representative of foliage quantity and canopy porosity. In this study, the discrimination threshold between 1 and 2 was chosen as the median of the number of LiDAR beams interceptions in the considered horizontal section. The thresholds for abstract value 0 were chosen specifically for each horizontal section: exactly 0 interception for section, below 300 LiDAR interceptions for a 10 cm wide scan slice for M section, and below 15 LiDAR interceptions for a 10 cm wide scan slice for H section. Considering the 4 sections (T, H, M, L) and 3 values for each of these, 81 vegetation states could be enumerated. Yet, because of consistency between total section T and other sections, and because of what can be observed in the field, there are much less combinations in practice.

Also, specific blocks without any vegetation are considered: the "missing vegetation" blocks. The decision to consider a block as "missing vegetation" is taken with regards to the M section (T-H-M-L = xx0x). Indeed, statistics show that if M is empty, it means that the vine plant has not grown.

3.2.2. Correspondence between vegetation states and spray commands

The PSM function maps spray commands to each value of the quadruplet T-H-M-L of the field under study. In this study, the PSM function was produced using expertise based on the test of real sprayers on an artificial vineyard bench Naud et al. (2014).

7 spray commands were considered. Their name is based on the nozzles used for spraying:

- 3 commands with one nozzle (LH, CH, HH), with therefore a debit of 50% of the nominal flow.
- 3 commands with two nozzles ($LH\&CH, LH\&HH, CH\&HH$), i.e. the nominal flow.
- a command with all nozzles off, noted $-$.

Two spraying commands: C_{best} and C_{alt} are mapped to each possible vegetation state. C_{best} sprays the best dose (neither too high nor too low) at the best place and therefore corresponds to the most appropriate command. The alternative command C_{alt} sprays a local dose guaranteeing a protection of the vine, but which can use more spraying product and can be less adequately targeted than C_{best} . When no satisfactory alternative can

be defined, then $C_{alt} = C_{best}$. The Table 1 shows the mapping of C_{best} and C_{alt} for a selection of several vegetation states of our field under study. Supplementary material of the paper provides the whole mapping used in this study.

T-H-M-L	C_{best}	C_{alt}
xx0x	—	—
1010	LH	HH
1011	LH	CH
1022	LH&CH	LH&CH
1110	HH	CH
1111	CH	CH
2012	LH	LH&CH
2122	LH&CH	LH&HH
2222	LH&HH	LH&HH

Table 1: Excerpt of PSM function

3.2.3. Interest of alternative spray commands

The need to map two commands to each vegetation block instead of just C_{best} results from the response time of the nozzles. Choosing a unique local and ideal spray command for each block may not provide the optimal spraying on the whole field due to transition times in opening and closing nozzles. Indeed, to avoid insufficient spraying, when spray command is changed, any nozzle to be set ON needs to be activated before the beginning of the blocks, and any nozzle to be set OFF is deactivated after the end. In addition, during the closing and opening phase of a nozzle, the flow of this nozzle is not zero. So, changing too frequently a spray command can lead to an unnecessary overexposure of the vegetation to pesticides. This effect of nozzles dynamics is precisely why a computing framework is needed for a better control design. It is important to outline that in this application of model-checking with optimisation, spraying enough product on each vine plant is a constraint for production safety (vine production point of view) and that quantities sprayed overall on the whole vine plot should be optimised (environmental and economical point of view).

Let's consider for example, as in figure 3, a row of vines composed of 3 blocks b_1 , b_2 and b_3 with respective vegetation states 1-0-2-2, 1-1-1-0 and 1-1-1-1. According to the Table 1 (green boxes), only 2 sequences of commands are possible: the best one $S1 = (LH&CH, HH, CH)$, and $S2 = (LH&CH, CH, CH)$ which uses the command C_{alt} for the block b_2 . But the change of command for b_2 in $S1$ involves more closing

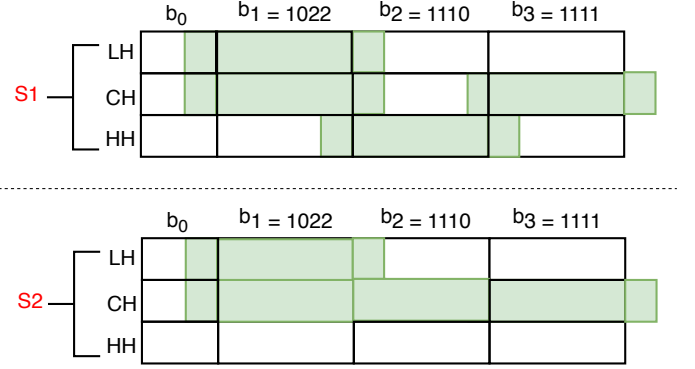


Figure 3: Interest of the alternative spray commands

and opening of the nozzles than in $S2$. Let's compute the Product Consumed (PC) for each sequences:

$$\begin{aligned}
 PC_{S1} &= Open(LH) + Open(CH) \\
 &\quad + Q_1(LH) + Q_1(CH) + \mathbf{Open(HH)} \\
 &\quad + Close(LH) + \mathbf{Close(CH)} + Q_2(HH) \\
 &\quad + \mathbf{Open(CH)} + \mathbf{Close(HH)} \\
 &\quad + Q_3(CH) + Close(CH)
 \end{aligned}$$

$$\begin{aligned}
 PC_{S2} &= Open(LH) + Open(CH) \\
 &\quad + Q_1(LH) + Q_1(CH) \\
 &\quad + Close(LH) + Q_2(CH) \\
 &\quad + Q_3(CH) + Close(CH)
 \end{aligned}$$

with:

- $Open(X)$: the amount of product sprayed when opening the nozzle $X \in \{LH, CH, HH\}$. It is in fact independent of the nozzle considered, but this notation facilitates the understanding.
- $Close(X)$: the same for closing the nozzle X .
- $Q_i(X)$: quantity of product sprayed during the block b_i by the nozzle X .

Assuming that all nozzles have the same flow ($Q_i(X)$ is the same $\forall X$), it follows that $Q_2(CH) < Open(HH) + Close(CH) + Q_2(HH) + Open(CH) + Close(HH)$ and consequently $PC_{S2} < PC_{S1}$. This proves that the use of an alternative command instead of the preferred one can reduce the cost of a spraying sequence

In conclusion for Step 1, PSM is a static mapping function that assigns to each vegetation state two possible spraying commands. In step 2, a recommendation

map will be established, i.e. a link between the vegetation at each location in the field and the appropriate commands.

3.3. Step 2: Definition of the spatialised recommendation map

The step 2 consists in the processing of real LiDAR data to obtain a list of vegetation blocks for a row, using the PSM function of step 1. At the end, each block will be characterised by its commands C_{best} and C_{alt} and by its duration (the time required to spray in this block). Each block should be long enough to guarantee the opening and closing of the nozzles at the right time, but short enough to effectively discriminate the vegetation density. Thus the data processing algorithm of step 2 is designed to finely adapt the duration and the number of blocks in a row.

3.3.1. Initial LiDAR data processing

The LiDAR data is first analysed by slices of reduced width (10 cm) in order to detect with good spatial accuracy the absence or presence of vegetation.

For each vegetation slice, and for each horizontal section within a slice (T, H, M and L), the number of LiDAR beam interceptions is counted, then converted into a qualitative value on $\{0, 1, 2\}$. This makes it possible to obtain a vegetation state coded in the form T-H-M-L for each slice, while respecting the selected thresholds. Therefore, it is now possible to establish a first specialised recommendation map (SRM) for these slices using the PSM function, as shown in table 2.

block number	vegetation state	C_{best}	C_{alt}
block 1	1011	LH	CH
block 2	1001 → 1011	-	-
block 3	1011	LH	CH
block 4	1021	LH	CH

Table 2: Example of the building of the SRM

But it is not possible with our hypothetical automated sprayer to change nozzles for each slide. Indeed, at a speed of 1.4 m/s (about 5 km/h), 10 cm represents only a duration of 0.07s. Yet, as explained seen in section 2.2.2, the opening or closing time of the nozzles requires 0.2 s. Thus, slices must be grouped into blocks having a minimal length of 50 cm.

Therefore, a block identification algorithm based on filtering and aggregation rules was established.

3.3.2. Aggregation and filtering of blocks

1. Homogenization of similar slices:

In order to benefit from the similarity of neighbouring slices, the first Rule for Aggregation and Filtering (named *RAF1*) is applied for each slice and each horizontal section in the slice.

RAF1: Let s_{i-1} , s_i and s_{i+1} be 3 successive slices, X denotes an horizontal section ($X \in \{H, M, L\}$) and $vegState(X, i)$ denotes the vegetation state in the horizontal section X for the slice s_i .

$$(vegState(X, i - 1) = vegState(X, i + 1)) \Rightarrow vegState(X, i) \leftarrow vegState(X, i + 1)$$

For example, in table 2, as the block 2 has two similar neighbours for the section M , then its vegetation state becomes 1011.

Then, from vegetation state and using PSM function, C_{best} and C_{alt} commands are computed.

RAF2 is, then, applied for each slice and each command (C_{best} and C_{alt} commands).

RAF2: Let $Cmd[i]$ denotes the command for the block s_i ($cmd \in \{C_{best}, C_{alt}\}$)
 $(Cmd[i - 1] = Cmd[i + 1])$
 $\Rightarrow Cmd[i] \leftarrow Cmd[i + 1]$

For example, in table 2, this rule makes the C_{best} command of the block 2 become LH and the C_{alt} command of the block 2 become CH .

2. Identification and aggregation of the "missing vegetation" blocks:

The objective is then to separate the vegetation blocks from the missing vegetation blocks, for which the spraying command must close all the nozzles. Now, if there is a block between two missing vegetation blocks and that the command for this block uses only one nozzle (meaning this is block has low density) then this block can be considered a missing vegetation block (*RAF3*)

RAF3: Let $C_{best}[i]$ the command C_{best} for the block s_i , similarly for C_{alt} and $merge(s_i, ..., s_n)$ a function that merge the blocks s_i to s_n in s_i :

$$\begin{aligned} &[(C_{best}[i - 1] = -) \wedge (C_{best}[i + 1] = -) \wedge (C_{best}[i] \in \{LH, HH, CH\})] \Rightarrow \\ &C_{best}[i] \leftarrow - \wedge C_{alt}[i] \leftarrow - \wedge \\ &merge(i - 1, i, i + 1) \end{aligned}$$

3. Aggregation of similar slices:

At this point, the location of the missing vegetation blocks has been accurately detected. Now, the contiguous slices having the same command can be grouped (*RAF4*).

RAF4: Let $C_{best}[i]$ the command C_{best} for the block s_i , similarly for C_{alt} and $merge(i_1, \dots, i_n)$ as defined before:

$$[(C_{best}[i] = C_{best}[i+1]) \wedge (C_{alt}[i] = C_{alt}[i+1])] \Rightarrow merge(i, i+1)$$

4. **Aggregation of narrow isolated slices:** At this point, the most similar vegetation blocks were aggregated. In the case where too small blocks remain, *RAF5* consists in associating the remaining small blocks (size < 50 cm) with its larger neighbouring block at the condition that this block is not a missing vegetation block.

RAF5: Let $sizeBlock[i]$ the size of block s_i , function $max(i, j)$ (resp. $min(i, j)$) returns the number of the block with the bigger (resp. lower) size and $merge(i, j)$ as defined below:

$$(sizeBlock[i] < resolution) \wedge (C_{best}[max(i-1, i+1)] = -) \Rightarrow merge(i, max(i-1, i+1))$$

$$(sizeBlock[i] < resolution) \wedge (C_{best}[max(i-1, i+1)] = -) \Rightarrow merge(max(i, min(i-1, i+1)), min(i, min(i-1, i+1)))$$

Please note that iteration of *RAF5* needs to be performed adequately in order to avoid that, starting from the first blocks, blocks would much often grow according to the lefthand side. Once s_i and s_{i+1} have been merged, the algorithm has to address next the blocks that were identified s_{i+2} and s_{i+3} before the merging.

To conclude, RAF rules of AMPS methodology, allow to extract a list of vegetation blocks from a raw LiDAR data using the PSM function. The blocks were grouped depending on their vegetation density, and missing vegetation blocks were detected and precisely located. By considering a fixed sprayer speed throughout the row, the block lengths are converted into spraying durations. The computed spatialized recommendation map (SRM) which associates to each identified block, its durations and its C_{best} and C_{alt} commands will be used in the model presented in next section.

3.4. Step 3: Definition of the spraying command map

The step 3 of AMPS, based on the model-checking process, allows to compute and verify an optimal spraying command map. At first step, a formal model for the Precision Spraying Problem (PSP), called *PTA_PSP* and based on a network of Priced Timed Automata

Behrmann et al. (2004), was designed. The SRM obtained in step 2 is an input data of this model. The model represents the *possible* behaviors of the automated sprayer. Specifications on *expected* spraying behavior are then expressed in CTL temporal logic with reference to the model. During the verification phase, these properties are checked on the model, including the specific property that computes the optimal command sequence. The model-checking process was implemented using the UPPAAL-CORA tool.

3.4.1. Modelling the Precision Spraying Problem

The *PTA_PSP* model is schematized in figure 4. It is composed of 7 Priced Timed Automata with the following functions:

- Row start automaton (SA): manages the starting of spray in the row,
- Movement automaton (MA): manages the movements of the sprayer inside the row from block to block,
- Anticipation automaton (AA): selects the spraying command for the next vegetation block,
- Control nozzles automaton (CA): manages the opening and closing of each nozzle according to the chosen spraying command,
- Nozzles automata (NA_i): represent the behaviour of each nozzle (3 nozzles represented by 3 automata).

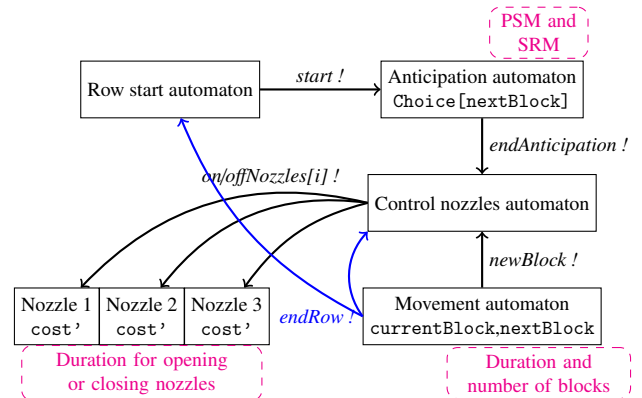


Figure 4: Scheme of our model: automata synchronization, input data and main global variables

Input data. As shown figure 2, the input of the models is SRM (i.e. for each block a C_{best} and C_{alt} command and a duration of spraying). Each command is defined by the sets of nozzles that must be respectively opened and closed. These input data are represented in the dashed magenta nodes on figure 4. They are defined in the model as command static data, implemented as global constants available for each automaton.

Global variables. The global structure of our model is based on several global variable shared by all the automata. In particular, `currentBlock` is an integer representing the index of the vegetation block that the sprayer is currently spraying, while `nextBlock` is an integer representing the index of the next vegetation block, necessary to anticipate the opening of the nozzles. Also, the spraying command chosen by the anticipation automaton is stored in a table `Choice[]` which records the optimal command for each of the blocks.

Synchronization between automata.. Automata can be synchronized through two types of channels: Binary channels (a transmitter and a single receiver) and Multiple channels (a transmitter and many or zero receivers). For example, in the model *PTA_PSP* and as shown figure 4, `newBlock` is a binary channel sent at the end of each block. There are also two tables of binary channels `onNozzle` and `offNozzle`. `endRow` (to indicate the end of the row) and `endAnticipation` (to indicate that a command has been selected for the next block) are multiple channels.

Modelling of the cost.. The quantity of sprayed product is modeled for each nozzle in the nozzles automata, using the cost rate function `cost'`. This function represents in UPPAAL-CORA the flow of product sprayed at any time by the nozzle considered. The higher the flow, the higher the cost will be at the end. In UPPAAL-CORA, this cost rate is an integer. The following conventions were used. When a nozzle is closed then `cost'=0`. When a nozzle is fully opened (has normal flow) then `cost'=2`. During transitions for opening or closing a nozzle, the flow is neither zero nor maximum. These transitions are represented by a flow rate reduced by half (`cost'=1`).

3.4.2. Verifying properties and computing the (optimal) Command Sequence

Specifications on the expected spraying behaviour of the Precision Spraying problem are described and formalized using UPPAAL's syntax requirement specification language² (inspired from CTL temporal logic).

The property used to obtain the *optimal command* sequence with the lowest cost is :

"Is there a command sequence that allows the sprayer to reach the end of the row (while applying the command constraints specified in the model)?"
This property is translated in temporal logic by:

$E <> \text{currentBlock} == \text{nb_block}-1 \text{ and } SA.\text{end},$

with *SA* is the Row start automaton, *end* is a state in *SA* which denotes that the sprayer reaches the end of the row and all nozzles are off, *nb_block* is the number of blocks forming the row and *currentBlock* is the block currently sprayed.

The resulting command sequence can be a mixture of C_{best} and C_{alt} commands. It is possible to impose the use of only C_{best} or C_{alt} command.

UPPAAL-CORA check the properties and provide a trace with the lowest cost. As in the model the cost function calculates the total amount of product sprayed, the cost calculated in the optimal command is the minimum quantity of product necessary to spray the row while ensuring sufficient protection.

The model checking with the CORA function thus allows to obtain an accurate command optimizing the cost criteria (here, the quantity of spraying product) while guaranteeing the correct behaviour of the sprayer. But the model checking strength can be its weakness: the enumeration of all the possible cases which guaranty the verification results also implies an intrinsic complexity. For this reason, the use of model checking on real and complex application cases is known to be difficult Ghazel et al. (2022). In a case such like solved here, vine rows can contains many blocks (over 100 blocks) and for each block two commands are possible. Therefore, the complexity of deciding between these two commands for each block of a row is exponential to the number of blocks.

To overcome the combinatorial explosion problem that may result from this, a decomposition methodology based on the spatial characteristic of the precision agriculture problem at hand was developed. It is described in the next section.

²<https://docs.uppaal.org/language-reference/requirements-specification/>

4. Decomposition methodology

The overall idea of the proposed decomposition methodology is to break down the system and/or the verification into sub-parts that can be solved independently regarding the properties to be validated over the whole system.

The hard part of the model checking decomposition is to find how to decompose while preserving a consistent expression of "local" properties with regards to the "global" ones. While the decomposition criteria provided here are specific to the Precision Spraying Problem, the intent is to propose a generic decomposition method that can be used for decision support in other agricultural domains or beyond.

The decomposition of a model checking problem should consist in three phases: the decomposition of the model (modelling decomposition), the decomposition of the verification process (verification decomposition) and the analysis of the decomposition (decomposition analysis). Modelling decomposition partitions the model into n sub-models. 2 sub-models may have an overlap zone in common. When such overlaps are needed, they should be chosen in order to ease the verification decomposition. In this precision spraying problem, considering the decomposition that can be required to calculate the optimal sequence for spraying a row, supposedly at a constant speed, the overlap zone has 1D spatial meaning: it is a block. Verification decomposition decomposes the resolution of the property to be checked on the global model into the resolution of properties on the sub-models. Decomposition analysis proves that the verification of the properties on the sub-models guarantees the verification of the initial property on the global model.

Three decomposition criteria will be considered: the spatial organisation of the field in rows, the presence of holes in the vine row without vegetation to spray, and the cases where C_{best} and C_{alt} should be the same according to crop protection needs. More details will be provided on this last criterion which is the most interesting one, considering the 3 phases of the decomposition (modelling, verification and analysis). The outline of the section follows these 3 phases.

4.1. Modelling Decomposition

The modelling decomposition consists in decomposing the model into n parts. One or several criteria for decomposition need to be found out in order to proceed to this.

Decomposition criterion. The intrinsic spatial characteristics of the agricultural applications provide guidance for decomposing. The geometrical structure of most of the agricultural fields is a useful element for decomposition. In the Precision Spraying problem, considering that each row is sprayed independently, step 3 of AMPS methodology can be applied separately to each row. The decomposition of a model including n rows to n models including each a unique row is thus straightforward. On the practical side, the model presented in 3.4 was designed for one row, with a set of data for each row of the studied field. Steps 1 and 2 of AMPS are better applied at a larger scale (field or vineyard) in order to have consistent crop protection of the vineyard.

Other characteristics may be used to find a decomposition criterion, depending on the application cases. The idea is to find an agricultural characteristic that imposes a fixed and known value in the verification process. This value will be the pivot of the decomposition strategy for verification. In the Precision Spraying case, where an optimal spraying command sequence is searched, the optimal command sequence before the pivot should be independent of the optimal command sequence after it. From this idea, two criteria were identified for the Precision Spraying problem in order to decompose the verification of a row. The first one relates to blocks with missing vegetation. The command to be applied in this case is to close all the nozzles. This criterion is close to the spatial decomposition of the different rows, as the nozzles are closed between two rows, with the significant difference that sub-systems overlap on missing vegetation blocks. The impact of overlapping will be explained hereafter.

A criterion that is more complex to handle can be extracted considering the PSM function. The presence of a block where $C_{best} = C_{alt}$ in a row represents a case where the command to apply is known a priori. These blocks allow to break the dependency between the sequence of commands before and after them, which is the basic need for the decomposition process. The MC decomposition based on the criterion $C_{best} = C_{alt}$ is detailed in the following.

Forming row parts. A row part is a subset of successive blocks of a row. The row parts are defined so that there is an overlapping block that belongs to two successive parts. This overlapping block is the one which meets the requirements of the decomposition criterion (here $C_{best} = C_{alt}$). We then call it here a "same command block".

Thus, a row R is decomposed into n parts $\{P_1, \dots, P_n\}$. Each P_i is a set of blocks which begins with a block

where $C_{best} = C_{alt}$ or with the first block of the row, and which ends with a block where $C_{best} = C_{alt}$ or with the last block of the row. The figure 5 illustrates, by an example, the formation of the row parts. The example row R is formed of 10 blocks. The blocks $\{b_4, b_7\}$ are same command blocks ($C_{best} = C_{alt}$). The part P_1 is made up of the succession of blocks from the block b_0 at the start of the row to the first same command block b_4 . The part P_2 is the succession of blocks from block b_4 to block b_7 . The block b_4 is the overlapping block between P_1 and P_2 . The same reasoning applies to the part P_3 which ends with the last block of the row and overlaps with P_2 in b_7 .

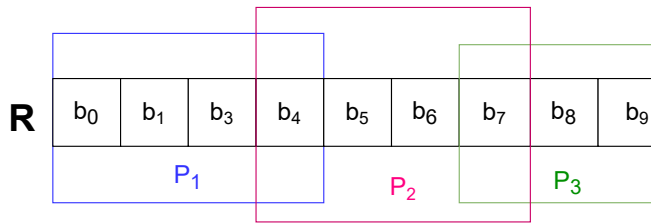


Figure 5: Decomposition of row R to 3 parts

Generating sub-models. Using the *PTA_PSP* model for UPPAAL-CORA, the generation of the sub-models for each row part consists only in editing the input data of the model. No change is needed in the description of the automata. The global constants describing commands are updated with information related to the corresponding row part: the value of the number of blocks forming the row is replaced with the value of the number of blocks forming the part (constant `nb_block`); and all the tables storing the information of these blocks will be updated with only the concerned blocks. It is worth noting that, as the configuration of the models is based on text files, the modelling decomposition is automated. It is also important to have in mind that, because the model of a part of a row is a model of a row with a reduced number of blocks, some parts have a "virtual row ending" (parts P_1 and P_2 in figure 5) and some have a "virtual row beginning" (parts P_2 and P_3 in same figure). Real beginnings and endings of rows have the characteristic that the nozzles should be all off before and after spraying the row. Technically, in the model of a part of a row, this constraint is also applied to its virtual beginning and its virtual ending. The consequences of this for calculating the optimal sequence and the optimal cost for a whole row from the optimal sequences and optimal costs for the parts are analysed in section 4.3.

4.2. Verification Decomposition

The verification decomposition decomposes the resolution of the property to be checked on the global model into the resolution of properties on the sub-models.

Let us recall that the property allowing to obtain the optimal command sequence applied on all the rows is the property PP3 described in the section 3.4.2. The verification process on the sub-models is based on the same property, but with the modifications of the models previously mentioned.

The decomposition of the verification consists in verifying this property on each row part. It is important to note that in the model of a part, `nb_block` becomes the number of blocks forming the part and `StartRowAut.end` is reached when the sprayer finishes spraying all the blocks of the part.

Checking the property PP3 on the sub-model allows to calculate the Optimal Sequence to be applied on the part and to calculate its Optimal Cost. The complete optimal sequence can be calculated from the concatenation of the optimal sequences of the parts, and the global optimal cost can be calculated from the sum of the optimal costs of the parts. Rules for concatenation and cost rectification terms respectively required in these operations when overlapping occurs in decomposition (see figure 5) will be explicited hereafter.

4.3. Decomposition Analysis

The decomposition analysis is about proving that the verification of the properties on the sub-models allows the verification of the initial property on the global model. Let us consider a row, or row part such as in equation 1:

$$S_R = \oslash \triangleright C?_1 \triangleright C?_2 \triangleright C_3 \triangleright C?_4 \triangleright C?_5 \triangleright \oslash \quad (1)$$

In equation 1, \oslash means that all nozzles are off. $C?_i$ denotes a choice to make for block b_i and C_i is the command for block b_i when it has a unique possibility. The decomposition can be made here using block b_3 as overlapping block. Sequences S_A and S_B for the resulting parts P_A and P_B can be written:

$$S_A = \oslash \triangleright C?_1 \triangleright C?_2 \triangleright C_3 * \triangleright \oslash \quad (2)$$

$$S_B = \oslash \triangleright *C_3 \triangleright C?_4 \triangleright C?_5 \triangleright \oslash \quad (3)$$

The symbol $*$ either on the left or on the right of C_3 denotes that overlapping occurs here. The concatenation law for parts having an overlapping is given in

equation 4. It can easily be shown that when applying this concatenation law to S_A and S_B , then $S_R = S_A \triangleright S_B$.

$$C * \triangleright \oslash \triangleright \oslash \triangleright * C = C \quad (4)$$

Now, as written in equation 5, the rectification terms for calculating the cost of S_R from the costs obtained for S_A and S_B once solved by CORA algorithm can be formulated. Considering that the cost for C_3 has been counted once in S_A with C_3^* and once again in S_B with $*C_3$ then the cost $Q_3(C_3)$ of this command should be retrieved from the sum of costs of parts. Considering also that there was no actual closing and re-opening of nozzles for C_3 between C_3^* and $*C_3$, the formulation of the cost correction term is provided in 6. This reasoning applies to any decomposition of a row in n parts by simple recursion of cutting a part in two. The calculation of optimal cost of a row from optimal sequences on n row parts is thus demonstrated.

$$c(S_A \triangleright S_B) = c(S_A) + c(S_B) + \text{corr}(S_A \triangleright S_B) \quad (5)$$

$$\text{corr}(S_A \triangleright S_B) = -Q_3(C_3) - \text{close}(C_3) - \text{open}(C_3) \quad (6)$$

In this section, it was shown how to proceed to model-checking decomposition. In section 6, the decomposition methodology will be applied on a real vine plot.

5. LiDAR field data

5.1. 2D LiDAR information of canopy structure

A Sick LMS100 (SICK AG, Düsseldorf, Germany) 2D LiDAR sensor was used in the study. The LMS100 is a fully-automatic divergent laser scanner based on time-of-flight (TOF) measurement with a typical error of ± 30 mm, a selectable angular resolution set to 0.5° , a maximum scan angle of 270° and a maximum range of 20 m. With these settings, there were 541 distances recorded for each complete laser rotation, which is hereafter referred to as a “scan”, and scans were obtained at 50 Hz. The LMS100 laser emission wavelength is 905 nm (near infrared) and it is Class one eye-safe. The LMS100 and data logging system were mounted on a purposely-built stainless-steel mast fixed behind the tractor operating the sprayer, according to a previously described procedure Cheraïet et al. (2020). The LMS100 sensor height ranged from 1.1 m above ground level. The tractor was driven along the vineyard rows at a constant forward travel speed of 5 km/h, with a typical error of ± 0.21 km/h. This sensing system was coupled

to a Real Time Kinematic (RTK) GNSS receiver (Teria GSM correction, Vitry-sur-Seine, France) to identify the start and end point of the sampling units. Once the starting point was set, scans were aggregated using a fixed forward distance based on the constant tractor speed to generate a 3D point cloud reconstruction of the vine environment. The sprayer replicated commercial operations, i.e. the tractor only traversed every second row so that the canopy was only scanned from one side. This differs from most previous research activities with LiDAR sensors, but was deliberately done to approximate commercial conditions. Full details of the system set-up are given in Cheraïet et al. (2020).

5.2. Field data

A vine estate with one block “Aglae” (*Vitis vinifera* L. cv Marselan), was chosen for the study in 2019. Located in Grabels, close to Montpellier (Hérault, France), the Mas Piquet Estate is characteristic of a vineyard from the south of France, both in terms of grape varieties and training systems. The rows were northeast-southwest oriented. Vines were trellised in 2.5 m rows with a 1.0 m vine spacing within rows using a cordon Royat system that comprised a cordon wire and at least one trellising wire. 2D LiDAR acquisitions were carried out on two dates during the season (T1: 2019/06/20, T2: 2019/07/31). These dates correspond respectively to the following BBCH scale growth stages Lorenz et al. (1994): beginning of berry development (72-73), beginning of veraison (81). From the data obtained at the two LiDAR acquisition dates in 2019, we were able to study the dynamics at an intra-plot scale of canopy height and width. The height and width of the vegetation increased almost linearly from the flowering stage to the bunch closure stage. At T1, at the scale of the whole plot, the vegetation height was between 0.62 m and 1.51 m. At the same date, the vegetation thickness was between 0.27 m and 0.65 m. At T2, at the scale of the whole plot, the vegetation height was between 0.85 m and 1.64 m, and a vegetation thickness of between 0.39 m and 0.95 m. Trimming, combined with increasing water stress over summer, tends to stagnate any further growth.

In the following, the AMPS method will be implemented on the study plot.

6. RESULTS & DISCUSSION

In this section, we will apply the AMPS method for real vine LiDAR data. The optimal command sequence, taking into account sprayer dynamics, will be compared to classical spraying without automation.

The AMPS Step 1 consists on defining the precision spraying mapping which maps each vegetation state to two spray commands C_{best} and C_{alt} . We have already provide this map in Section 3.2 (cf. Table 1). Now, we proceed to apply step 2.

6.1. Computation of blocks and spatialized recommendation map

The AMPS step 2 consists in the processing of the LiDAR data to obtain C_{best} , C_{alt} and the duration of each vegetation block for the studied plot. The sprayer is supposed to move at 1.4 m/s. The length of a block is expressed as a function of the time needed to spray it. Applying the step 2 algorithm, we obtain the tables 3, 4 and 5 that we analyse in the sequel.

In the table 3, the column "Row" provides an identifier to each row, this ID is a value between 1 and 5. The column "D(s)" represents the duration of time needed to spray the row in seconds (s). The column "NB" gives the number of blocks forming the row, the column "M" provides the number of blocks with a missing vegetation and the column "NS" gives the number of blocks where the command C_{best} is equal to the command C_{alt} . The column " D_{max} " provides the higher duration in the row, the column " ND_{min} " provides the number of blocks having the smaller duration of 0.4 s in the row and the column " N_{Longer} " provides the number of blocks having a duration longer than 1 s in the row.

Row	D (s)	NB	M	NS	D_{max} (s)	ND_{min}	N_{Longer}
1	40,1	58	1	24	1,7	16	9
2	65,2	84	2	44	2,1	21	21
3	67,9	89	5	43	4,6	21	15
4	71,2	82	5	42	3,6	18	26
5	70,5	90	0	41	5,3	27	19

Table 3: Row Decomposition

We can remark that in all rows the number of blocks having the same commands represents around 50% of the number of blocks forming the row. In this case, the optimization is performed on only half of the row. It is expected that the optimal configuration (choosing between C_{best} and C_{alt}) and the C_{best} configuration (choosing only C_{best}) will be close.

In the table 4, we precise for each row the vegetation states encountered before and after applying step 2. After applying step 2, some states are deleted and others are added due to the aggregation rule *RAF1*. Deleted

states (resp. added states) are represented with cross (X) in a red color (resp. blue color). Black cross means that the vegetation state is encountered before and after applying step 2.

It can be seen that some vegetation states are present in all rows such as (T-H-M-L) = (1-1-1-1). The vegetation state (T-H-M-L) = (1-1-2-0) is added in the row 1 after applying *RAF1* and some states are present in some rows and deleted after applying *RAF1* such as (T-H-M-L) = (1-0-1-1) present in the rows 1, 2 and 3 and deleted in rows 4 and 5. This is due to the minimum size of the block.

Let us recall that from the precision sprayer mapping defined in step 1 of AMPS (cf. section 3.2), 7 spray commands were considered and their name is based on the nozzles used for spraying: — (all nozzles off), *LH*, *CH*, *HH*, *LH&CH*, *LH&HH* and *CH&HH*. In the table 5, we precise for each row (column R), the frequency of each spray command (the number of times that the spray command is repeated) in the commands C_{best} (column C_b) and C_{alt} (column C_a).

It can be observed that the most frequent command in C_{alt} control sequence for all rows is *LH&HH* followed by *CH* then *LH&CH* or *CH&HH*. However, for the C_{best} control sequence, the most frequent command for the first row is *CH* followed by *LH* and *CH&HH* at equal frequency. For the rows 2, 3, 4 and 5, the most frequent command for the C_{best} control sequence is *LH&HH* followed by *CH*. This is similar to the C_{alt} control sequence. The command *HH* does not appear in any row and any control sequence. This is expected. Indeed, from the precision spraying mapping defined in AMPS Step 1, the command *HH* appears, for the C_{alt} control sequences, in the vegetation state (T-H-M-L) = (1-1-0-1-0) and for the C_{best} control sequences, in the vegetation states (T-H-M-L) = (1-1-1-0) and (T-H-M-L) = (1-2-1-0) (cf. yellow rows in the Table 4). The vegetation states in yellow cells are deleted after applying the step 2 of AMPS due to the aggregation rule *RAF1*. Therefore, the command *HH* does not appear.

Now, from the output data from step 2, we will calculate the optimal command sequence choosing for each block either C_{best} or C_{alt} while globally minimizing the amount of spray product.

6.2. Computation of spraying command map Need of Decomposition analysis

Let us recall that the optimal command sequence is obtained by verifying property PP3 on the *PTA_PSP* model using the UPPAAL-CORA tool.

Veg.states (THML)	R1	R2	R3	R4	R5
'x x 0 x '	X	X	X	X	X
'1 0 1 0 '				X	
'1 0 1 1 '	X	X	X	X	X
'1 0 1 2 '	X	X	X	X	X
'1 0 2 1 '	X	X		X	
'1 0 2 2 '	X	X	X	X	X
'1 1 1 0 '	X	X	X	X	X
'1 1 1 1 '	X	X	X	X	X
'1 1 1 2 '	X	X	X	X	X
'1 1 2 0 '	X		X		
'1 1 2 1 '	X	X	X	X	X
'1 1 2 2 '	X	X	X	X	X
'1 2 1 0 '	X	X	X	X	X
'1 2 1 1 '	X	X	X	X	X
'1 2 1 2 '	X	X	X	X	X
'1 2 2 0 '	X	X	X	X	
'1 2 2 1 '	X	X	X	X	X
'2 0 1 2 '	X	X			
'2 0 2 1 '	X				X
'2 0 2 2 '	X	X		X	
'2 1 1 2 '	X	X	X	X	X
'2 1 2 0 '				X	
'2 1 2 1 '	X	X	X	X	X
'2 1 2 2 '	X	X	X	X	X
'2 2 1 0 '			X	X	
'2 2 1 1 '	X	X	X	X	X
'2 2 1 2 '	X	X	X	X	X
'2 2 2 0 '	X			X	
'2 2 2 1 '	X	X	X	X	X
'2 2 2 2 '	X	X	X	X	X

Table 4: Vegetation states distribution in row

During the verification, we did not find the optimal command sequence for any row due to the combinatorial explosion problem which occurs after 2 to 3 minutes from the start of the verification. Two reasons explain this combinatorial explosion: the first is related to the intrinsic complexity of model-checking. Indeed, by simplifying, if we consider only the complexity for one row which is composed, at least, of 58 blocks and for each block in this row two commands are possible, which makes a complexity of at least 2^{58} . To find the best cost, the Model Checking process generates the whole tree and it explodes. The second reason is related to a technical limitation of the UppAal-CORA model-checking tool. Indeed, the available binary of UPPAAL-CORA was built only for a 32-bit architecture which

Command	R1		R2		R3		R4		R5	
	C_b	C_a	C_b	C_a	C_b	C_a	C_b	C_a	C_b	C_a
--	1	1	2	2	5	5	5	5	0	0
LH	10	1	5	0	10	0	8	0	6	0
CH	25	17	22	13	20	15	20	13	23	15
HH	0	0	0	0	0	0	0	0	0	0
LH&HH	9	36	30	47	30	50	30	47	31	56
LH&CH	3	1	14	12	6	12	9	11	10	12
CH&HH	10	2	11	10	18	7	10	6	20	7

Table 5: Row analysis

limits the memory usage to 4 GB of RAM. Computing the optimal command sequence using more than 4 GB of memory was therefore technically not possible.

To overcome the combinatorial explosion in order to be able to compute the optimal command sequence, the decomposition methodology previously proposed is applied.

6.2.1. Modelling Decomposition

Let us recall that the modelling decomposition consists on decomposing the row into n row parts and then, generates the sub-model associated to each part. The decomposition criterion here is $C_{best} = C_{alt}$. From Table 3 and in all rows, the Number of blocks having the same commands (column NS) represents around 50% of the number of blocks forming the row (column NB). Therefore, applying the decomposition criterion $C_{best} = C_{alt}$ will produce row parts of 2 blocks which will unnecessarily complicate the validation process. The idea is to assemble the parts so as to have parts of "reasonable" complexity (between 25 and 30 blocks)³.

In the table 6, the column "Row" is the identifier of each row. The column "NB" gives the Number of Blocks forming the row, the column "NP" provides the Number of Parts, the column "PL" gives the Part Limits, and the column "NB.P" provides the Number of Blocks in each Part.

It can be noted that, in general, the number of blocks forming parts is between 26 and 30 blocks. The last part of each row has a small size (between 7 and 13 blocks) because it is formed by the rest of blocks forming the row.

6.2.2. Spray savings

In this section, we present the spray savings using decomposition methodology. As explained above, the plot

³This value is determined by expertise.

R	NB	NP	PL	NB in the
1	58	3	$b_{0_b_{26}}, b_{25_b_{51}}, b_{50_b_{59}}$	26, 26, 26
2	84	4	$b_{0_b_{26}}, b_{25_b_{52}}, b_{51_b_{77}}, b_{76_b_{85}}$	26, 27, 30, 26
3	89	4	$b_{0_b_{27}}, b_{26_b_{52}}, b_{51_b_{81}}, b_{80_b_{90}}$	27, 26, 30, 26
4	82	4	$b_{0_b_{26}}, b_{25_b_{51}}, b_{50_b_{76}}, b_{75_b_{83}}$	26, 26, 26, 26
5	90	4	$b_{0_b_{27}}, b_{26_b_{53}}, b_{52_b_{78}}, b_{77_b_{91}}$	27, 27, 26, 26

Table 6: Row Decomposition

is decomposed in five rows and the savings in each row will be described.

In the table 7, the column "Row" is the identifier of each row. The column "NB" gives the Number of Blocks forming the row. The column "Classical cost" gives the cost while using the classical spray configuration $LH\&HH$ for the entire row. The column "Best cost" gives the cost while using the best spray configuration C_{best} . The column "Optimal cost" gives the cost while using the AMPS method which computes the optimal spray configuration (a mixture of the C_{best} and C_{balt} commands).

Row	NB	Classical cost	Best cost	Optimal cost
1	58	1604	1192	1148
2	84	2608	2344	2244
3	89	2716	2226	2156
4	82	2848	2220	2176
5	90	2820	2596	2548

Table 7: Comparative spraying configurations

The optimal cost is the lowest in the Table 7. It provides a saving of 2% to 4 % with reference to best cost and a saving of 10% to 28 % with reference to classical cost. The saving between best and optimal cost is slight, this is due to the number of blocks having the same commands which represents around 50% of the number of blocks forming the row.

But besides performances, the interest of our approach is its genericity (using same model for the verification of several properties) and its capacity to manage complexity (resolution of combinatorial explosion problem using decomposition methodology).

7. Conclusion

The agriculture of the 21st century requires the development of decision making systems that respond to climatic and ecological challenges. This paper focuses,

in the context of the phytosanitary treatment of vineyards, on the issue of precision agriculture and the consideration of agricultural spatial heterogeneity. The objective is to manage the sprayer nozzles dynamic in order to determine the optimal command sequence along a vineyard row optimizing the use of the phytosanitary products while maintaining a sufficient protection on each plant. During the last decades, many models and approaches have been developed to model and analyze agricultural systems Jones and al. (2016). Based on Model Checking and Cost Optimal Reachability Analysis, this paper proposes a complete answer addressing the accuracy and the optimality of the spraying treatment while managing the analyze complexity.

To achieve an accurate and optimal phytosanitary treatment of vineyards we proposed the Automata Modelling for Precision Spraying (AMPS) method decomposed in 3 main steps. The preliminary phase catches the human expertise and defines the links between the best (Cbest), the alternative appropriate (Calt) sprayer commands and the vegetation density to obtain an accurate and acceptable protection. Step 2 focuses on the real density characteristics of vine rows deduced from raw LIDAR scans. It permits to determine, according to the vegetation blocs and the nozzles responds times, the corresponding Cbest and Calt accurate commands that will be exploited during the final step. Finally, from Priced Timed Automata modeling the sprayer movements inside a row and the nozzle functioning, Step 3 uses model checking and the UPPAAL-CORA tool to compute the optimal and accurate sequence to spray a row with a minimal quantity of phytosanitary product.

In addition, to address real vineyard applications and deal with the problem of combinatorial explosion of the state-space, we proposed a decomposition method of the model-checking analysis. Sub-models limits are then defined according to hardware limitations and splitting a vineyard row into several parts having overlapping blocks.

This work also have some limitations and needs to be improved:

- Need of genericity: This work focuses on nozzle's specific configurations and characteristics. It can be easily extended to other classes of sprayers devices and of sprayer hands configuration.
- Need of ergonomic design: It is clear that the proposed work can only be done by experts in modelling and model checking and cannot be directly used by farmers. AMPS method is now inte-

grated in a graphic tools which automatically generates the optimal spraying command from the row LIDAR Data and the sprayers characteristics and configuration. A flexible and adaptable human-machine interface must now be developed to facilitate the dialogue with the end-user.

- Consideration of new spraying criterion: Today we considered only 2 criterion for the AMPS method: the accuracy and the optimality of the command. It would be fine to consider new criteria like the spraying quality for example. In this case, some Cbest and Calt configurations can have the same cost but the quality of Cbest is obviously higher than Calt.
- Analyze of MC analysis performance: Our work is based on UPPAAL-CORA tool. However UPPAAL is not the only one considering temporal issues (TAPAAL, TINA, ROMEO, HYTEC or Kronos). It would be interesting, to compare the performances of these different tools to be able to select the most efficient one to handle the modeling and analysis requirements while minimizing the computation time and the amount of the required hardware memory.
- Test new solutions for combinatorial explosion management: The combinatorial explosion of state-space remains an important limitation for model-checking analysis. Solutions like statistical model checking Legay A. (2010) Guldstrand Larsen (2013) would be investigated to tackle this problem. Combining simulation and model checking allows to reduce the computational cost while introducing some uncertainty.

Other questions concerning precision agriculture could be treated using model Checking. For example with the global warming, the efficient and accurate use of limited water resources will be an important challenge in the next few years. Furthermore Model checking can also be useful to optimize the control of an agricultural robot or a multi-robot team, or to ensure their safety or security.

Appendix A. Detailed description of *PTA_PSP* model

Add detailed description of broadcast and binary channel

The *PTA_PSP* model is schematized in figure 4. It is composed of 7 Priced Timed Automata with the following functions:

- Row start automaton (SA): manages the starting of spray in the row,
- Movement automaton (MA): manages the movements of the sprayer inside the row from block to block,
- Anticipation automaton (AA): selects the spraying command for the next vegetation block,
- Control nozzles automaton (CA): manages the opening and closing of each nozzle according to the chosen spraying command,
- Nozzles automata (NA_i): represent the behaviour of each nozzle (3 nozzles represented by 3 automata).

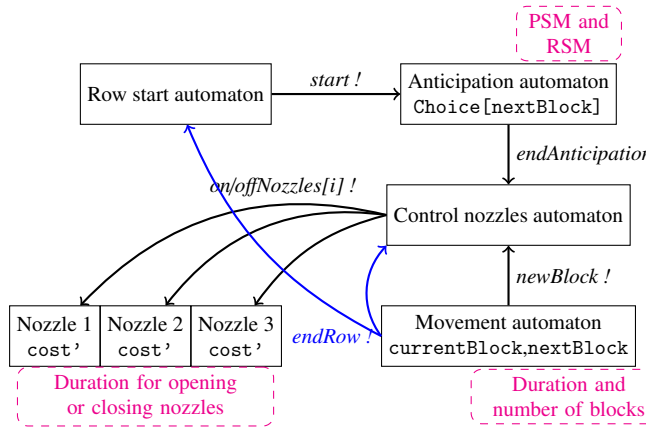


Figure A.6: Scheme of our model: automata synchronization, input data and main global variables




Figure A.7: Row Start automaton

Row Start automaton. This automaton, represented in the figure ??, manages the startup

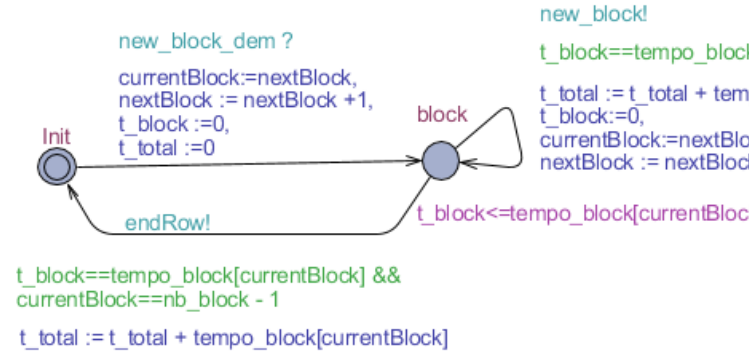


Figure A.8: Movement automaton

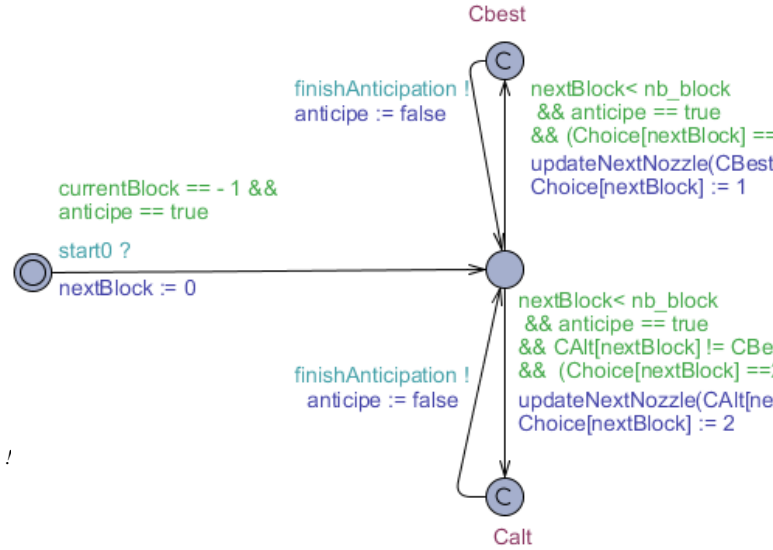


Figure A.9: Anticipation automaton

phase. It sends the three command events "start0", "start1" and "new_block_dem". It receives two events "finishAnticipation" and "endRow".

Detailed description

This automaton, represented in the figure ??, manages the startup phase. It sends a command event "start0" to the anticipation automaton to select a command for the first block. When selection is finished, it receives from the anticipation automaton, a "finishAnticipation" event. Then, it sends "start1" event to the nozzle control automaton to activate the nozzles for the first block. It waits *max_temp_open_Nozzle* the time required for nozzles to be opened. It sends to the displacement automaton a "new_block_dem" event to start spraying at the first block. When spraying is finished it re-

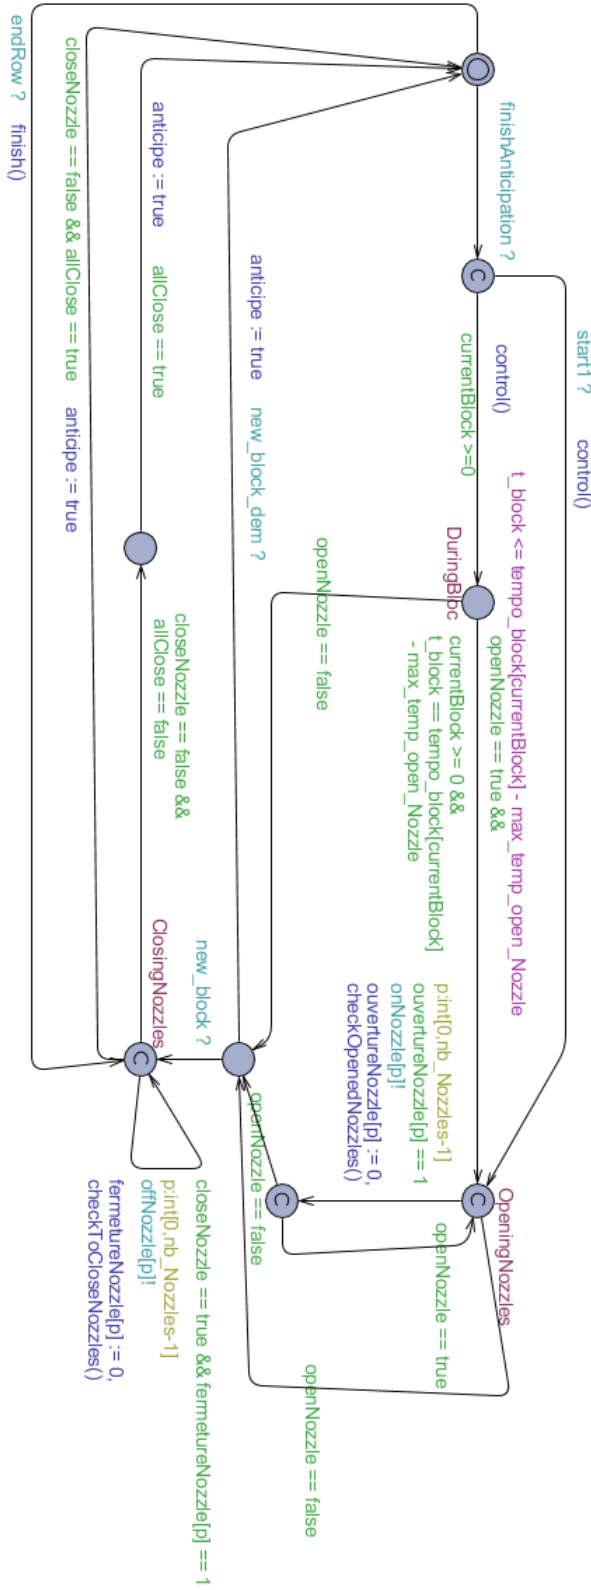


Figure A.10: Control Nozzles automaton

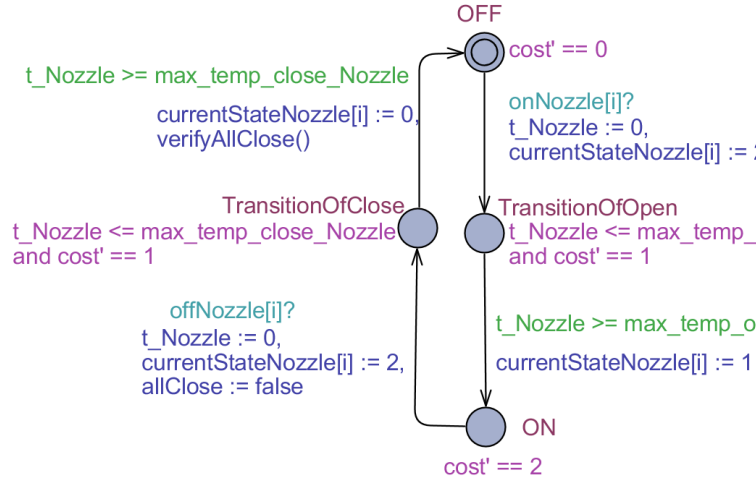


Figure A.11: Nozzles automata

ceives an "endRow" event. When all nozzles are closed ($allClose == true$), it passes to the state *end*.

Displacement automaton. This automaton, represented on the figure ??, allows to represent the displacement of the sprayer. The time required to spray a vegetation block is computed in step 2, based on the length of the block and the speed of the sprayer. This information is stored in the *tempo_block* variable. At the start, the sprayer is in the "Init" state. When it receives the start event "new_block_dem", it goes to the state *block*. The state *block* has an invariant $t_block \leq tempo_block[currentBlock]$, the sprayer remain in this state for the duration of this block. The state *block* has also a guard $t_block == tempo_block[currentBlock]$ on its outgoing transitions, the automaton signals the end of a block by sending in broadcast the event "new_block" and the end of a row by sending in broadcast the event "endRow" (it then returns to the state *Init*).

Anticipation automaton. This automaton, represented on the figure ??, makes it possible to select a command for the following block. The two possible commands for each vegetation block are C_{best} and C_{alt} which are stored respectively in *CBest* and *CAlt*. The *anticipation automaton* first receives the signal "start0" from the *startup automaton*. Then, if the value of the variable *Choice* is -1 (choice not predefined) then it chooses an order from *CBest* and *CAlt*, stores its choice in the variable *Choice* and calls the function *updateNextNozzle*. If *Choice* is predefined, then this choice is followed. Finally, the *anticipation automaton* sends, in broadcast, the event "finishAnticipation" and updates the variable *anticipe* to false so as not to loop

indefinitely.

Control Nozzles automaton. The role of this automaton, described in figure ??, is to control the nozzles. When it receives the signal "finishAnticipation" from the *Anticipation automaton*, it calls the function *control()* which determines the nozzles to be opened or closed for the next block. To secure the quantity of sprayed product in each block, the nozzles selected for opening are opened 0.2s before the start of the block (the value 0.2 is stored in the constant *max_temp_open_Nozzle*). Conversely, those which must be closed will not be completely closed until 0.2s after the block change (the value 0.2 is stored in the constant *max_temp_close_Nozzle*). To open nozzle *i*, the *nozzle control automaton* sends, *max_temp_open_Nozzle* before the end of the current block, the event *onNozzle[i]* (see guard $t_block \leq tempo_block[currentBlock] - max_temp_open_Nozzle$), and to close the nozzle *i*, it sends the event *offNozzle[i]*, after having received the synchronization event *new_block* from the *Displacement automaton*. As soon as the commands on the nozzles are effective, then the variable *anticipe* is set to *True* to allow anticipation for the next block.

Nozzles automata. These automata represent the behavior of each nozzle (figure ??). Each of these automata has four states: *OFF* (initial state), *ON*, *TransitionOfOpen* (opening) and *TransitionOfClose* (closing). It receives the signals "onNozzle" and "offNozzle" to pass from a state to another. The nozzles response time, for opening or closing, is supposed to be a fixed and known (*max_temp_open_Nozzle*, *max_temp_close_Nozzle*). It is set at 0.2s in our example.

Appendix A. Details on decomposition analysis

The decomposition analysis is about proving that the verification of the properties on the sub-models allows the verification of the initial property on the global model.

The idea of the proof will be illustrated on a row composed of 5 blocks, named b_1 to b_5 , as shown in figure ???. The duration of each block is greater than the sum of the opening and closing times of the nozzles, which is a necessary assumption given in the step 2 of AMPS. The row is divided into 2 parts: P_A groups together the first three blocks, and P_B includes the blocks b_3 to b_5 . b_3 is the overlapping block and so is included in both P_A and P_B . The decomposition criterion is such that $C_{best} = C_{alt}$. Thus, on the block b_3 for which overlapping occurs, the command is known.

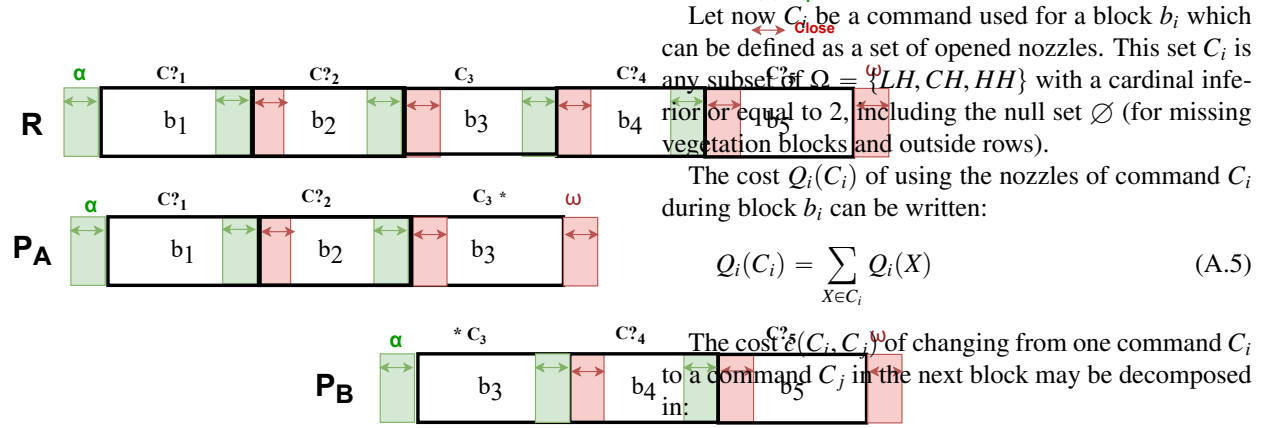


Figure A.12: Illustration of the decomposition to support proof

For the example row R depicted in figure ??, a sequence S_R for the whole row can be written:

$$S_R = C?_1 \triangleright C?_2 \triangleright C_3 \triangleright C?_4 \triangleright C?_5 \quad (A.1)$$

where C_i is the command for block b_i when it is unique (as for the overlapping block b_3) and where $C?_i$ denotes a choice to make for block b_i

In order to take into account that, before each row, and at the end of each row, all nozzles should be closed, equation ?? rewrites, with \emptyset meaning all nozzles off:

$$S_R = \emptyset \triangleright C?_1 \triangleright C?_2 \triangleright C_3 \triangleright C?_4 \triangleright C?_5 \triangleright \emptyset \quad (A.2)$$

Sequences S_A and S_B for parts P_A and P_B can be written:

$$S_A = \emptyset \triangleright C?_1 \triangleright C?_2 \triangleright C_3 * \triangleright \emptyset \quad (A.3)$$

$$S_B = \emptyset \triangleright *C_3 \triangleright C?_4 \triangleright C?_5 \triangleright \emptyset \quad (A.4)$$

The symbol $*$ either on the left or on the right of C_3 denotes that overlapping occurs here.

Details on the costs (product consumed) need now to be given. A rule was enunciated in section 2.2.2 which can be rephrased in the following way. When changing from one block to another, opening the nozzles needed in the new block and which were closed before has to be anticipated in the end of the previous block. Conversely, the nozzles no longer needed in the new block will be closed at the beginning of the new block. The consequences of this rule were explained in figure 3 and section 3.2.3. The costs for opening a nozzle X ($Open(X)$), using a nozzle X on a bloc b_i ($Q_i(X)$), and closing a nozzle X ($Close(X)$) were also introduced in section 3.2.3.

Let now C_i be a command used for a block b_i which can be defined as a set of opened nozzles. This set C_i is any subset of $\Omega = \{LH, CH, HH\}$ with a cardinal inferior or equal to 2, including the null set \emptyset (for missing vegetation blocks and outside rows).

The cost $Q_i(C_i)$ of using the nozzles of command C_i during block b_i can be written:

$$Q_i(C_i) = \sum_{X \in C_i} Q_i(X) \quad (A.5)$$

The cost $c(C_i, C_j)$ of changing from one command C_i to a command C_j in the next block may be decomposed

$$c(C_i, C_j) = open(C_i, C_j) + close(C_i, C_j)$$

$$open(C_i, C_j) = \sum_{X \in C_j \setminus C_i \cap C_j} Open(X)$$

$$close(C_i, C_j) = \sum_{X \in C_i \setminus C_i \cap C_j} Close(X)$$

Costs of sequences can now be calculated. The cost $c(S)$ of a sequence $S = C_{i-1} \triangleright C_i \triangleright C_{i+1}$ is the following:

$$c(S) = Q_{i-1}(C_{i-1}) + c(C_{i-1}, C_i) + Q_i(C_i) + c(C_i, C_{i+1}) + Q_{i+1}(C_{i+1})$$

The costs for the start ($\alpha = \emptyset \triangleright C$) and the end ($C \triangleright \emptyset$) of a part or of a row are:

$$c(\alpha) = open(C) + Q(C) \quad (A.7)$$

$$c(\omega) = Q(C) + close(C) \quad (A.8)$$

The concatenation law for parts having an overlapping and the rectification terms for costs of concatenated parts can now be formulated. Considering the example of figure ?? and the sequences provided in equations 1, 2 and 3, it follows that:

$$S_R = S_A \triangleright S_B \Rightarrow C_3 * \triangleright \oslash \triangleright \oslash \triangleright * C_3 = C_3 \quad (\text{A.9})$$

Concatenation rule for row parts. Considering two row parts overlapping on a block for which command C is known a priori (because $C_{best} = C_{alt}$), the concatenation rule for handling the overlapping block is the one of equation 4

$$C * \triangleright \oslash \triangleright \oslash \triangleright * C = C \quad (\text{A.10})$$

Considering that there is overlapping at block b_3 for which command should not be counted twice, and that termination *oslash* of part S_A and beginning *oslash* of part S_A are virtual, the concatenation rule stipulated in equation 4 is easily understood.

In order to prove that the concatenation of two optimal sequences found for the parts provided by decomposition of this example is an optimal sequence for the whole row, it is required that no term should be changed in the concatenated sequence for it to be optimal, and it is required to be able to calculate the optimal cost for the whole sequence from the optimal costs of the parts. Considering the first point, and considering two overlapping sequences such as S_A and S_B from our example. In an optimal choice for $C_{?1}$ and $C_{?2}$ within S_A , these choices only depend on the value of C_3 which is known. The same applies to choices for $C_{?1}$ and $C_{?2}$ within S_R . Thus, the optimal choices for $C_{?1}$ and $C_{?2}$ made in solving S_A are still valid for S_R . With similar reasoning, it follows that optimal choices for $C_{?4}$ and $C_{?5}$ made when solving S_B are still valid for S_R . Thus, provided that the concatenation rule stipulated in equation 4 is applied, the optimal sequence for S_R can be calculated from its S_A and S_B parts. This reasoning extends straightforwardly to calculating the optimal sequence for a vine row using n row parts. Considering the second point, cost calculation, it can be done from the costs calculated for the parts.

$$\begin{aligned} c(S_A) &= \text{open}(C_{?1}) + Q_1(C_{?1}) + c(C_{?1}, C_{?2}) + Q_2(C_{?2}) + c(C_{?2}, C_3) \\ &+ Q_3(C_3) + \text{close}(C_3) \end{aligned} \quad (\text{A.11})$$

$$\begin{aligned} c(S_B) &= \text{open}(C_3) + Q_3(C_3) + c(C_3, C_{?4}) + Q_4(C_{?4}) + c(C_{?4}, C_{?5}) \\ &+ Q_5(C_{?5}) + \text{close}(C_5) \end{aligned} \quad (\text{A.12})$$

The cost $c(S_R) = c(S_A \triangleright S_B)$ can be calculated from the S_R in a similar manner as in equations ?? and ??.

Defining $\text{corr}(S_A \triangleright S_B)$ by equation 5, this term can be easily calculated from equation 6

$$c(S_R) = c(S_A \triangleright S_B) = c(S_A) + c(S_B) + \text{corr}(S_A \triangleright S_B) \quad (\text{A.13})$$

$$\text{corr}(S_A \triangleright S_B) = -Q_3(C_3) - \text{close}(C_3) - \text{open}(C_3) \quad (\text{A.14})$$

This cost correction easily extends to cost correction for the calculation of optimal cost of a row from optimal sequences on n row parts.