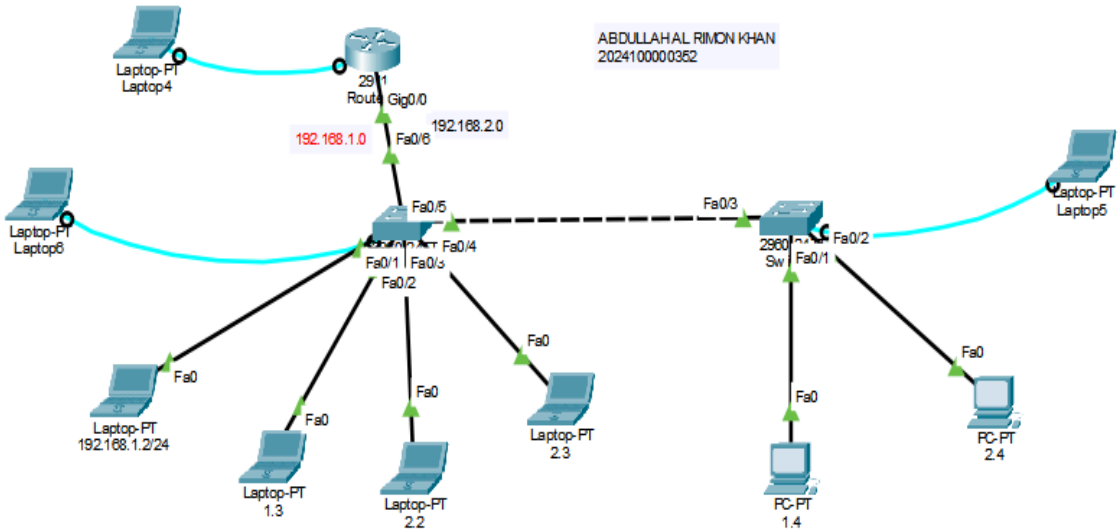
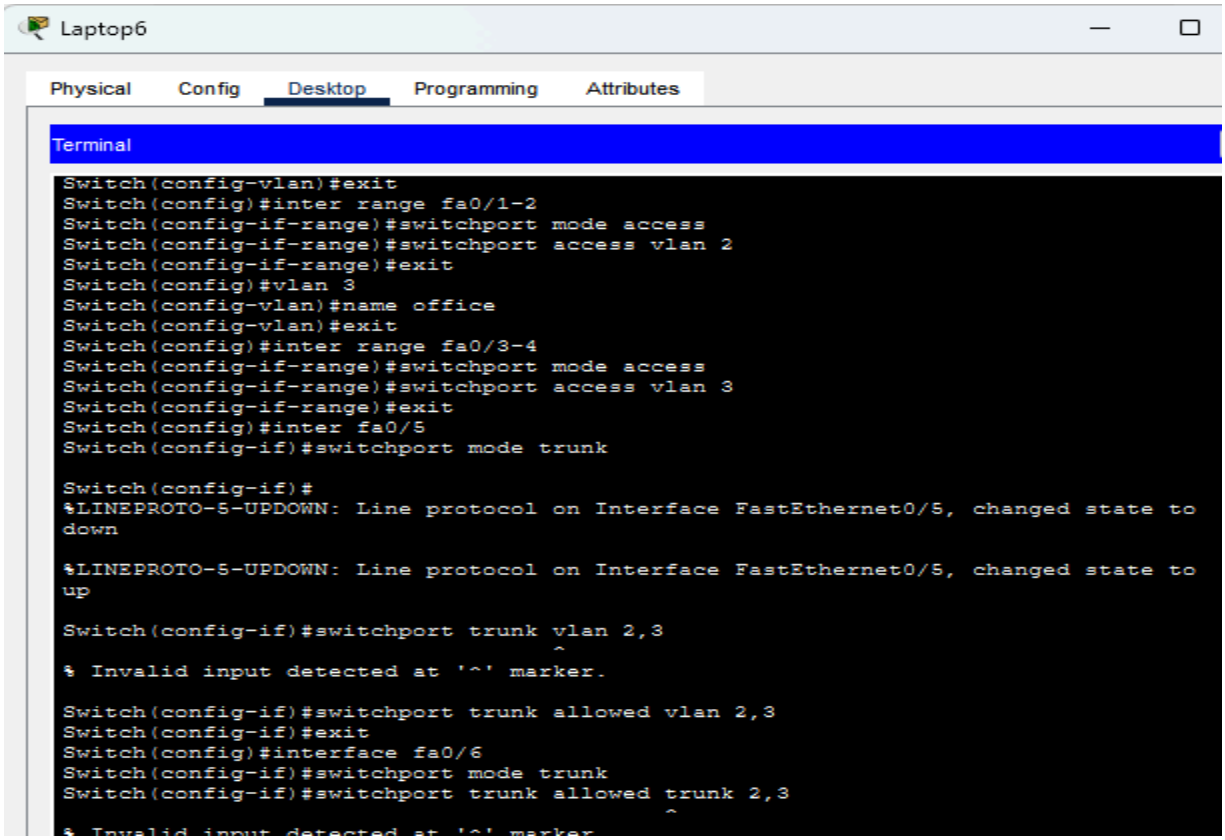
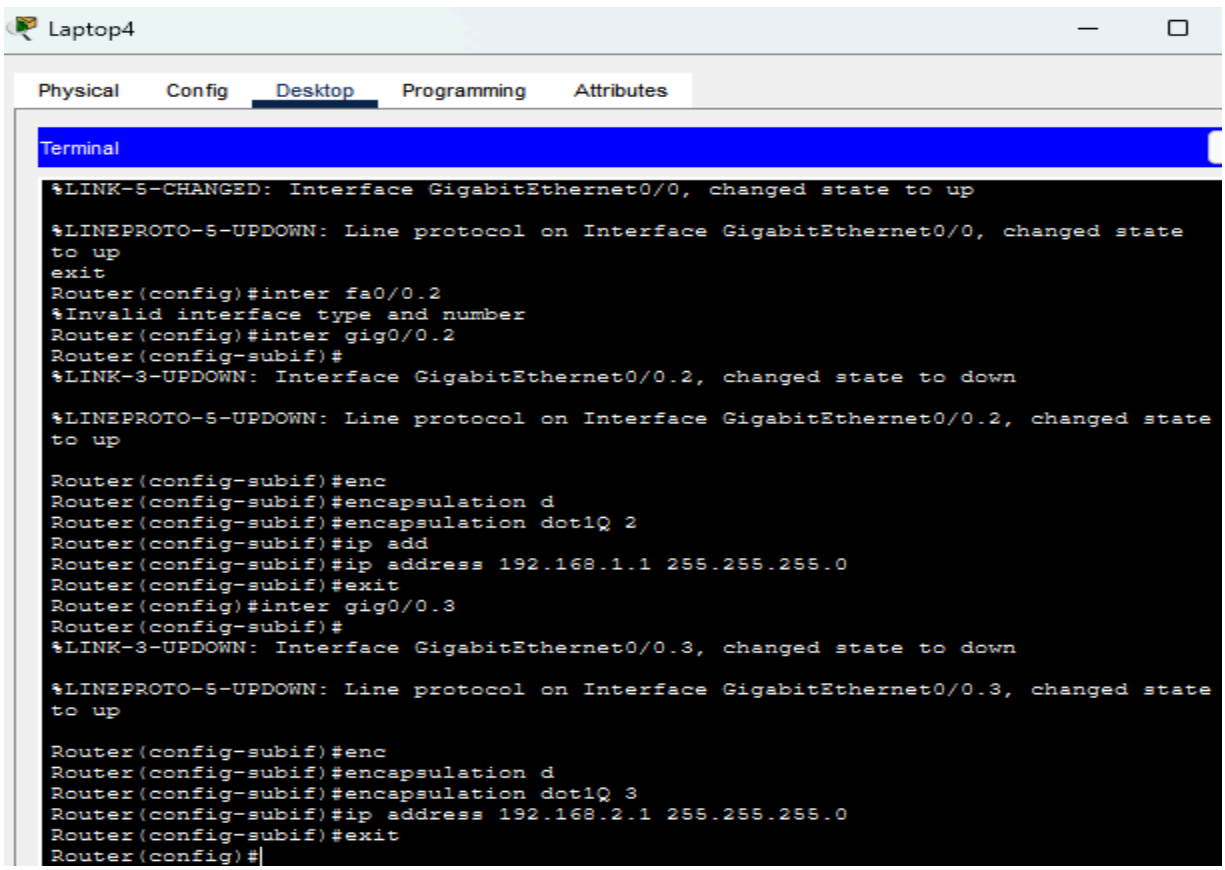
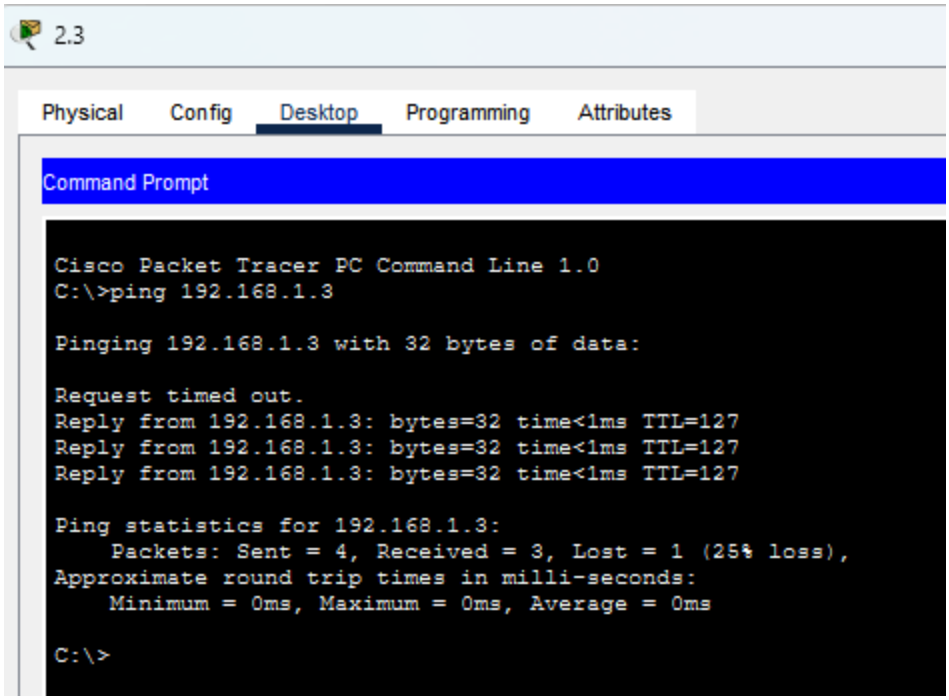
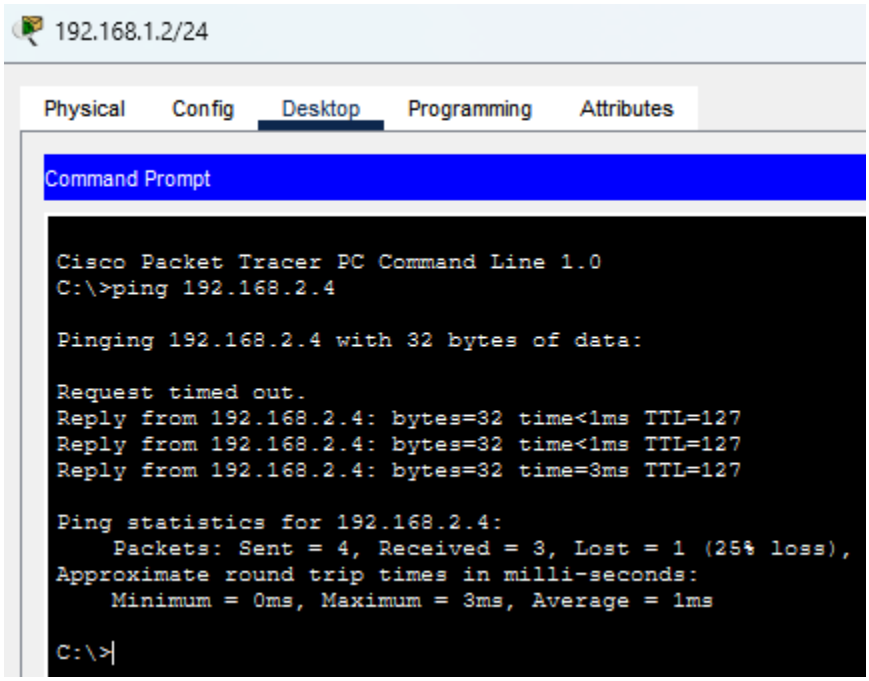

ABDULLAH AL RIMON KHAN
2024100000352
Laptop-PT
Laptop4
2911
Route
Gig0/0
192.168.1.0
Fa0/6
192.168.2.0
Laptop-PT
Laptop6
Fa0/5
Fa0/3
Laptop-PT
Laptop5
Fa0/4
Fa0/1
Fa0/2
2960
Sw
Fa0/2
Fa0/1
Fa0
Laptop-PT
192.168.1.2/24
Fa0
Laptop-PT
1.3
Fa0
Laptop-PT
2.2
Fa0
Laptop-PT
2.3
Fa0
PC-PT
1.4
Fa0
PC-PT
2.4


Laptop6
Physical
Config
Desktop
Programming
Attributes
Terminal
Switch(config-vlan)#exit
Switch(config)#inter range fa0/1-2
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 2
Switch(config-if-range)#exit
Switch(config)#vlan 3
Switch(config-vlan)#name office
Switch(config-vlan)#exit
Switch(config)#inter range fa0/3-4
Switch(config-if-range)#switchport mode access
Switch(config-if-range)#switchport access vlan 3
Switch(config-if-range)#exit
Switch(config)#inter fa0/5
Switch(config-if)#switchport mode trunk
Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
Switch(config-if)#switchport trunk vlan 2,3
% Invalid input detected at '^' marker.
Switch(config-if)#switchport trunk allowed vlan 2,3
Switch(config-if)#exit
Switch(config)#interface fa0/6
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed trunk 2,3


Laptop4
Physical
Config
Desktop
Programming
Attributes
Terminal
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
exit
Router(config)#inter fa0/0.2
%Invalid interface type and number
Router(config)#inter gig0/0.2
Router(config-subif)#
%LINK-3-UPDOWN: Interface GigabitEthernet0/0.2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.2, changed state to up
Router(config-subif)#enc
Router(config-subif)#encapsulation d
Router(config-subif)#encapsulation dot1Q 2
Router(config-subif)#ip add
Router(config-subif)#ip address 192.168.1.1 255.255.255.0
Router(config-subif)#exit
Router(config)#inter gig0/0.3
Router(config-subif)#
%LINK-3-UPDOWN: Interface GigabitEthernet0/0.3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.3, changed state to up
Router(config-subif)#enc
Router(config-subif)#encapsulation d
Router(config-subif)#encapsulation dot1Q 3
Router(config-subif)#ip address 192.168.2.1 255.255.255.0
Router(config-subif)#exit
Router(config)#


2.3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.3: bytes=32 time<1ms TTL=127
Reply from 192.168.1.3: bytes=32 time<1ms TTL=127
Reply from 192.168.1.3: bytes=32 time<1ms TTL=127
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>


192.168.1.2/24
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.4
Pinging 192.168.2.4 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.4: bytes=32 time<1ms TTL=127
Reply from 192.168.2.4: bytes=32 time<1ms TTL=127
Reply from 192.168.2.4: bytes=32 time=3ms TTL=127
Ping statistics for 192.168.2.4:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 3ms, Average = 1ms
C:\>