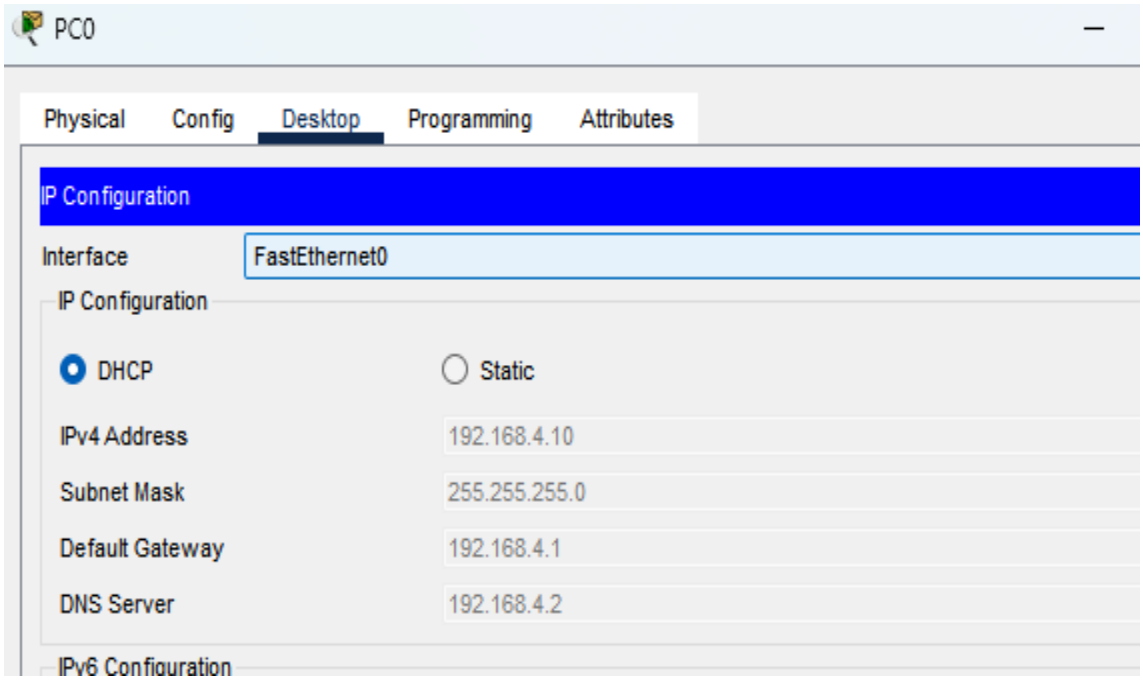
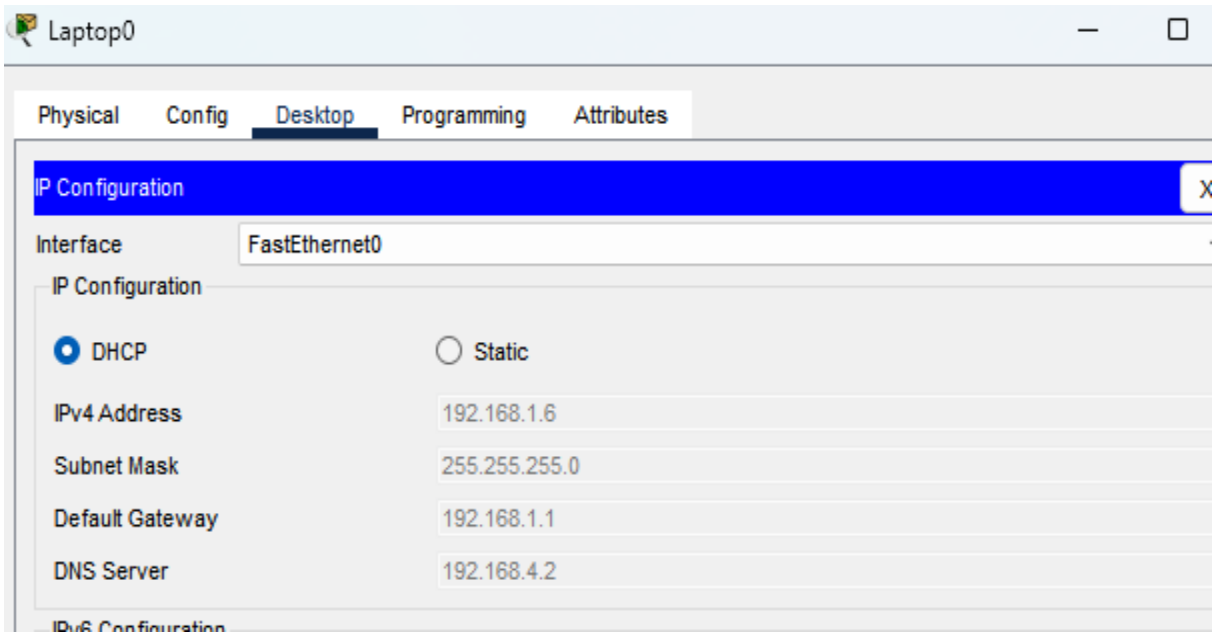

PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.4.10
Subnet Mask
255.255.255.0
Default Gateway
192.168.4.1
DNS Server
192.168.4.2
IPv6 Configuration


Laptop0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.6
Subnet Mask
255.255.255.0
Default Gateway
192.168.1.1
DNS Server
192.168.4.2

```
Router>en
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 192.168.5.0 255.255.255.0 192.168.3.1
Router(config)#ip route 192.168.2.0 255.255.255.0 192.168.3.1
Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.3.1
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
```

```
Router(config)#ip dhc
Router(config)#ip dhcp pool lan2
Router(dhcp-config)#ip dh
Router(dhcp-config)#ip dhc
Router(dhcp-config)#exit
Router(config)#ip dhc
Router(config)#ip dhcp e
Router(config)#ip dhcp excluded-address 192.168.5.1 192.168.5.5
Router(config)#ip dh
Router(config)#ip dhcp pool lan2
Router(dhcp-config)#network 192.168.5.0 255.255.255.0
Router(dhcp-config)#d
Router(dhcp-config)#def
Router(dhcp-config)#default-router 192.168.5.1 255.255.255.0
                                               ^
% Invalid input detected at '^' marker.

Router(dhcp-config)#def
Router(dhcp-config)#default-router 192.168.5.1
Router(dhcp-config)#dns
Router(dhcp-config)#dns-server 192.168.4.2
Router(dhcp-config)#exit
Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.1.1
Router(config)#ip route 192.168.4.0 255.255.255.0 192.168.3.2
Router(config)#no ip route 192.168.1.0 255.255.255.0 192.168.1.1
Router(config)#ip route 192.168.1.0 255.255.255.0 192.168.2.1
Router(config)#
```

```
C:\>ping 192.168.4.10

Pinging 192.168.4.10 with 32 bytes of data:

Reply from 192.168.4.10: bytes=32 time=12ms TTL=125
Reply from 192.168.4.10: bytes=32 time=12ms TTL=125
Reply from 192.168.4.10: bytes=32 time=12ms TTL=125
Reply from 192.168.4.10: bytes=32 time=12ms TTL=125

Ping statistics for 192.168.4.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)
Approximate round trip times in milli-seconds:
    Minimum = 12ms, Maximum = 12ms, Average = 12ms
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.5.6

Pinging 192.168.5.6 with 32 bytes of data:

Reply from 192.168.5.6: bytes=32 time=10ms TTL=126
Reply from 192.168.5.6: bytes=32 time=10ms TTL=126
Reply from 192.168.5.6: bytes=32 time=10ms TTL=126
Reply from 192.168.5.6: bytes=32 time=10ms TTL=126

Ping statistics for 192.168.5.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 10ms, Maximum = 10ms, Average = 10ms
```

