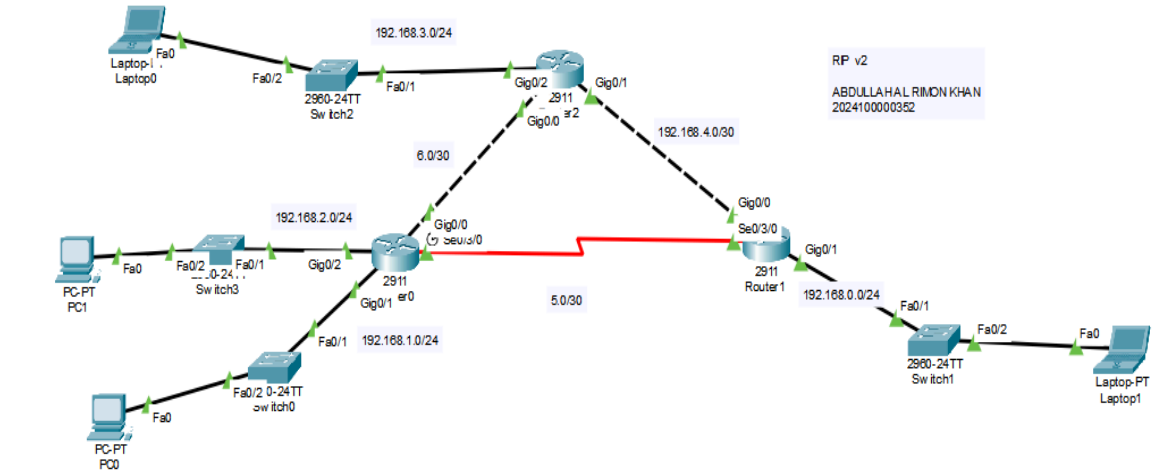


Router2

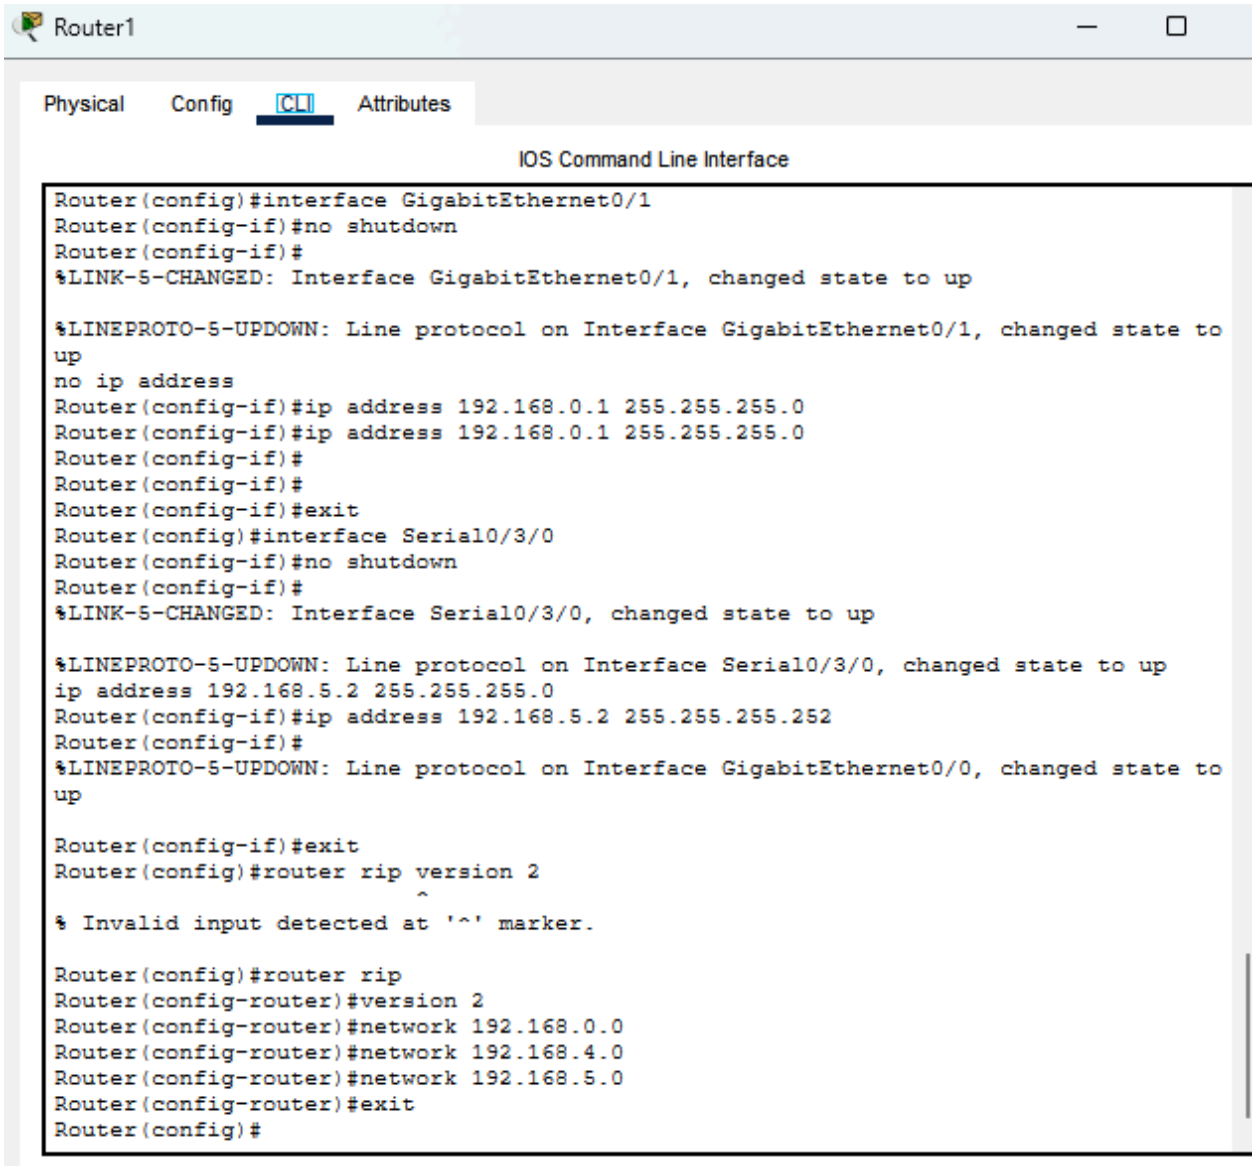
Physical Config CLI Attributes

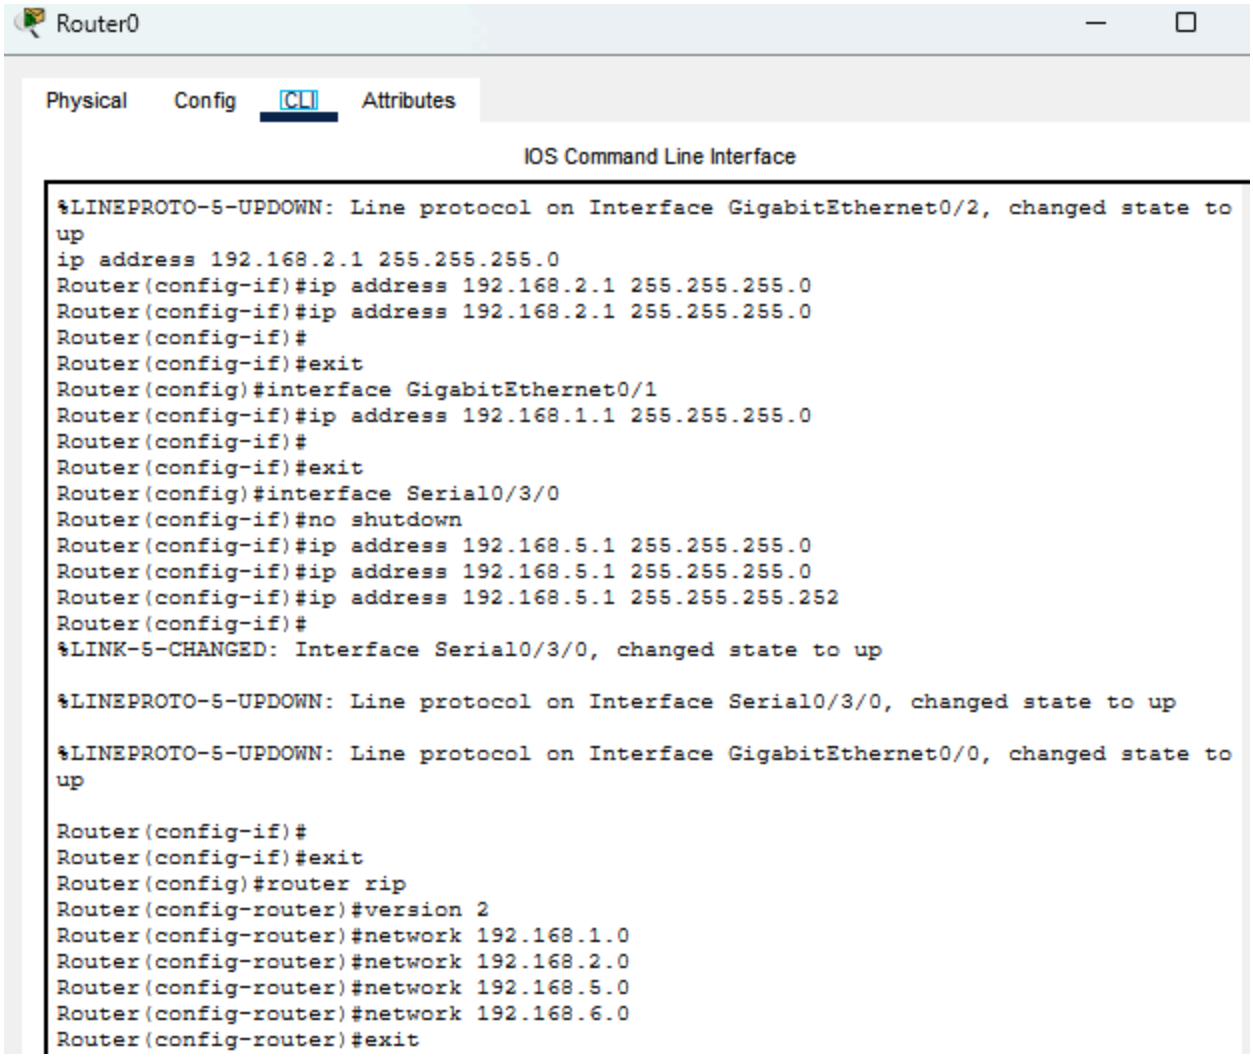
IOS Command Line Interface

```
up
ip address 192.168.6.2 255.255.255.0
Router(config-if)#ip address 192.168.6.2 255.255.255.0
Router(config-if)#ip address 192.168.6.2 255.255.255.252
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/1
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, c
up
ip address 192.168.4.2 255.255.255.0
Router(config-if)#ip address 192.168.4.2 255.255.255.0
Router(config-if)#ip address 192.168.4.2 255.255.255.252
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/2
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/2, c
up
ip address 192.168.3.1 255.255.255.0
Router(config-if)#ip address 192.168.3.1 255.255.255.252
Router(config-if)#
Router(config-if)#exit
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 192.168.3.0
Router(config-router)#network 192.168.6.0
Router(config-router)#network 192.168.4.0
Router(config-router)#exit
Router(config)#
```


Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config)#interface GigabitEthernet0/1
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
no ip address
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial0/3/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
ip address 192.168.5.2 255.255.255.0
Router(config-if)#ip address 192.168.5.2 255.255.255.252
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#router rip version 2
^
% Invalid input detected at '^' marker.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 192.168.0.0
Router(config-router)#network 192.168.4.0
Router(config-router)#network 192.168.5.0
Router(config-router)#exit
Router(config)#


Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/2, changed state to up
ip address 192.168.2.1 255.255.255.0
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/1
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial0/3/0
Router(config-if)#no shutdown
Router(config-if)#ip address 192.168.5.1 255.255.255.0
Router(config-if)#ip address 192.168.5.1 255.255.255.0
Router(config-if)#ip address 192.168.5.1 255.255.255.252
Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 192.168.1.0
Router(config-router)#network 192.168.2.0
Router(config-router)#network 192.168.5.0
Router(config-router)#network 192.168.6.0
Router(config-router)#exit

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126
Reply from 192.168.1.2: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.0.2: bytes=32 time=4ms TTL=126
Reply from 192.168.0.2: bytes=32 time=5ms TTL=126
Reply from 192.168.0.2: bytes=32 time=5ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 4ms, Maximum = 5ms, Average = 4ms
```