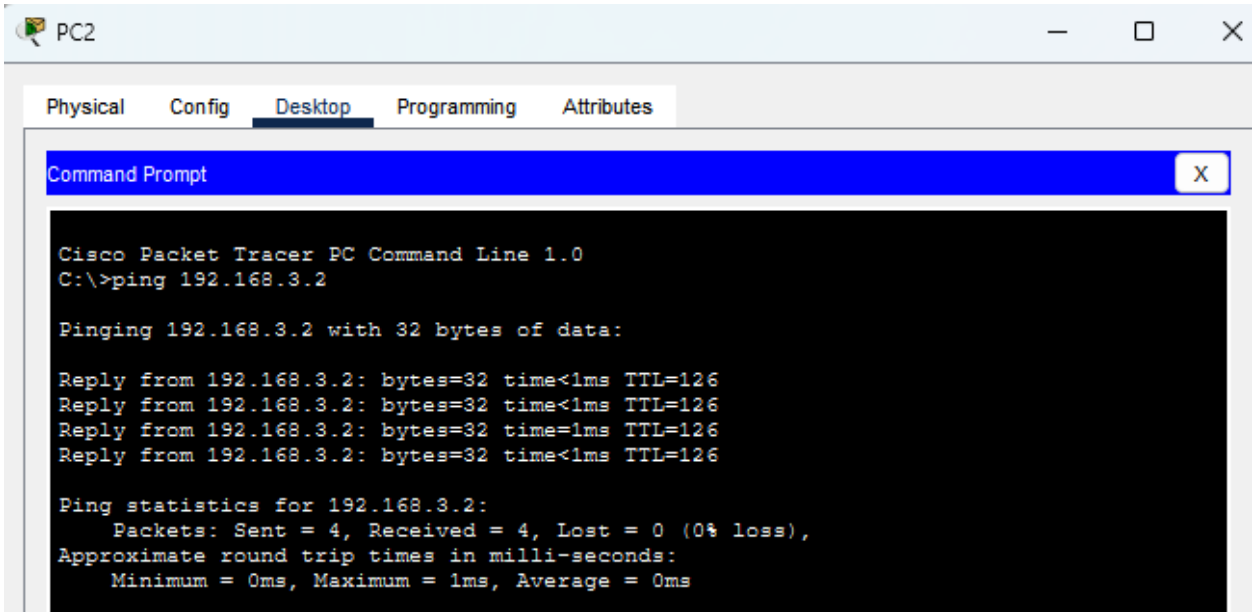
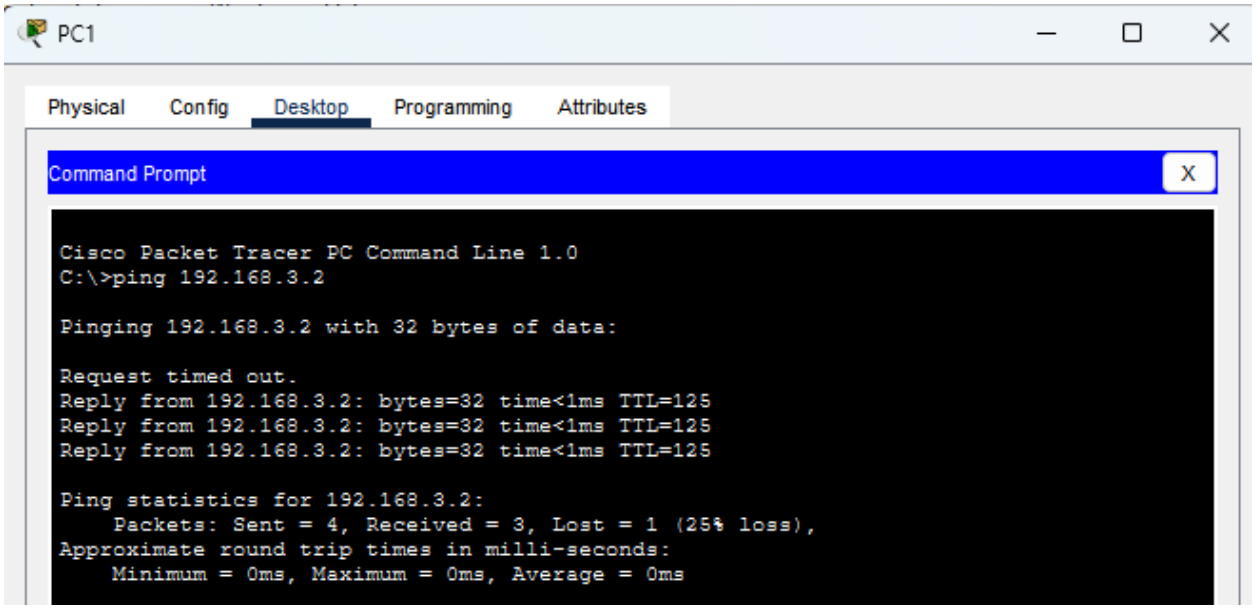
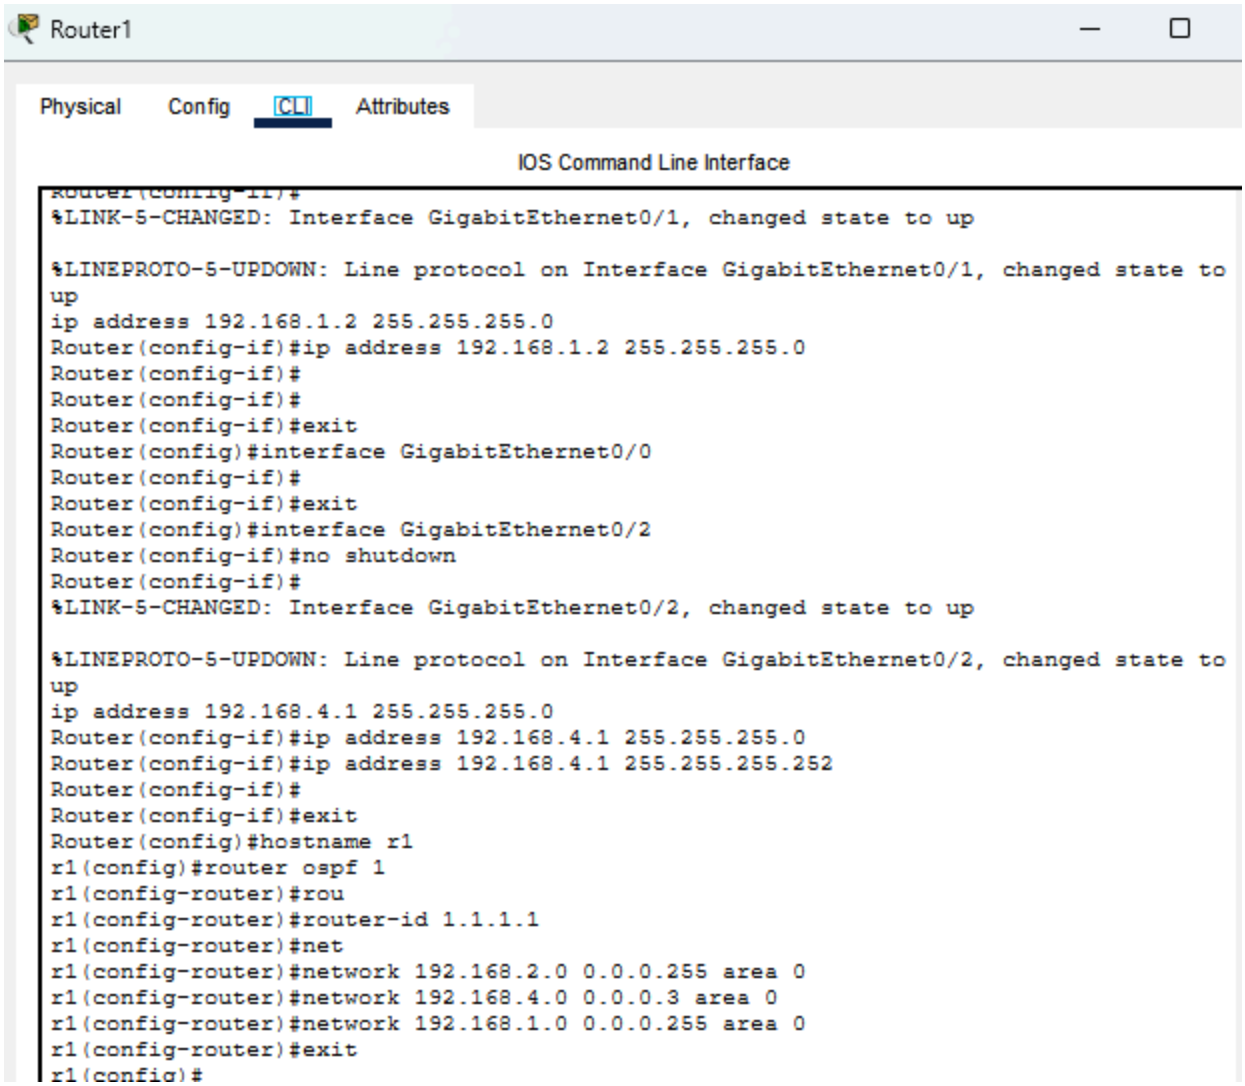
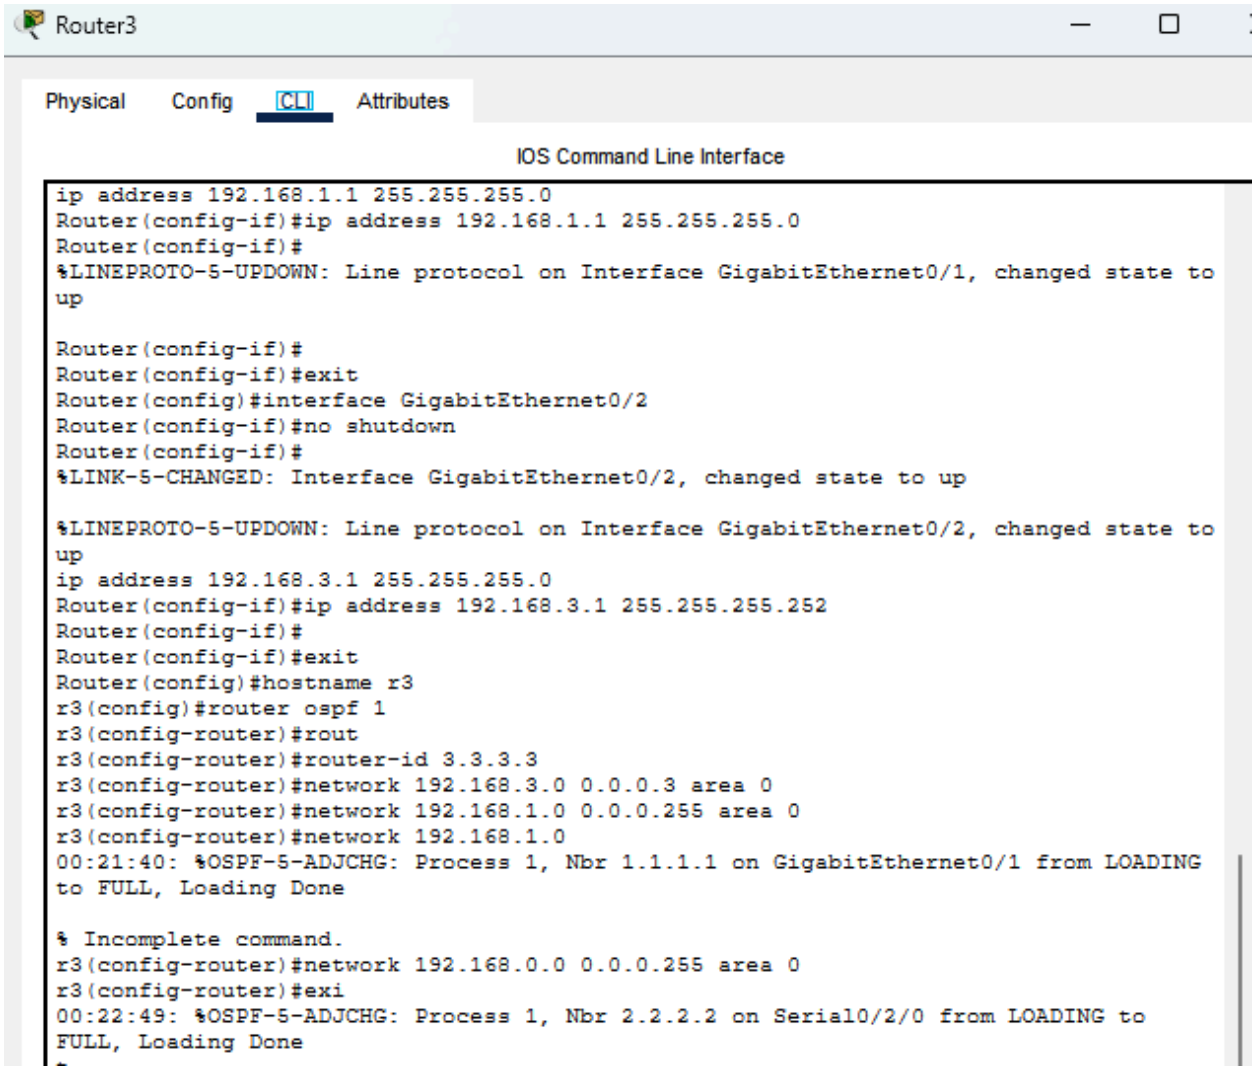
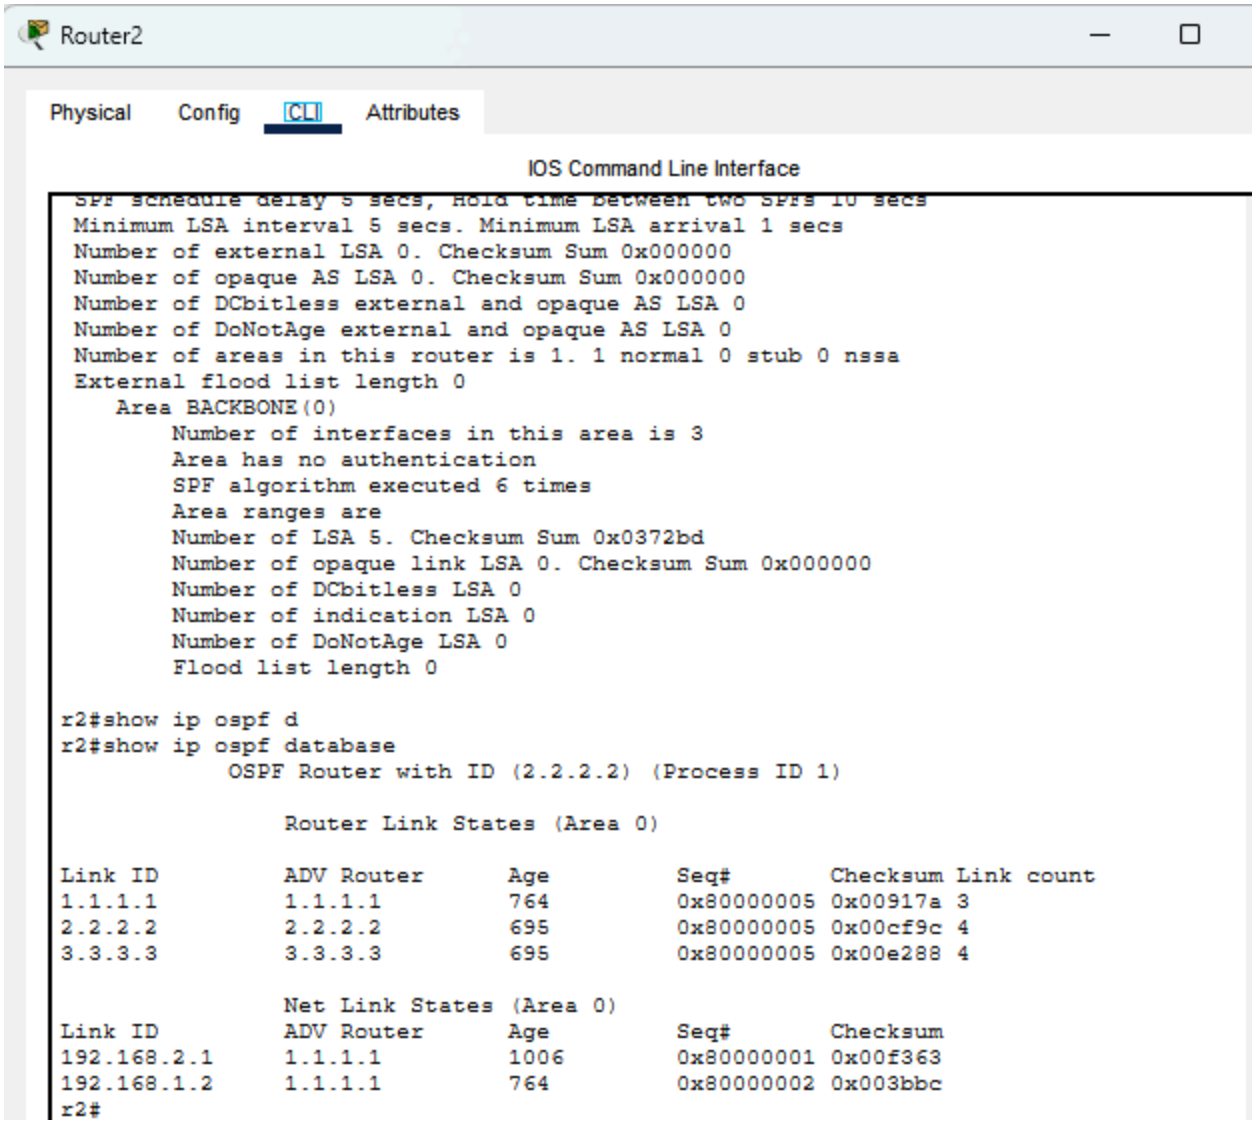
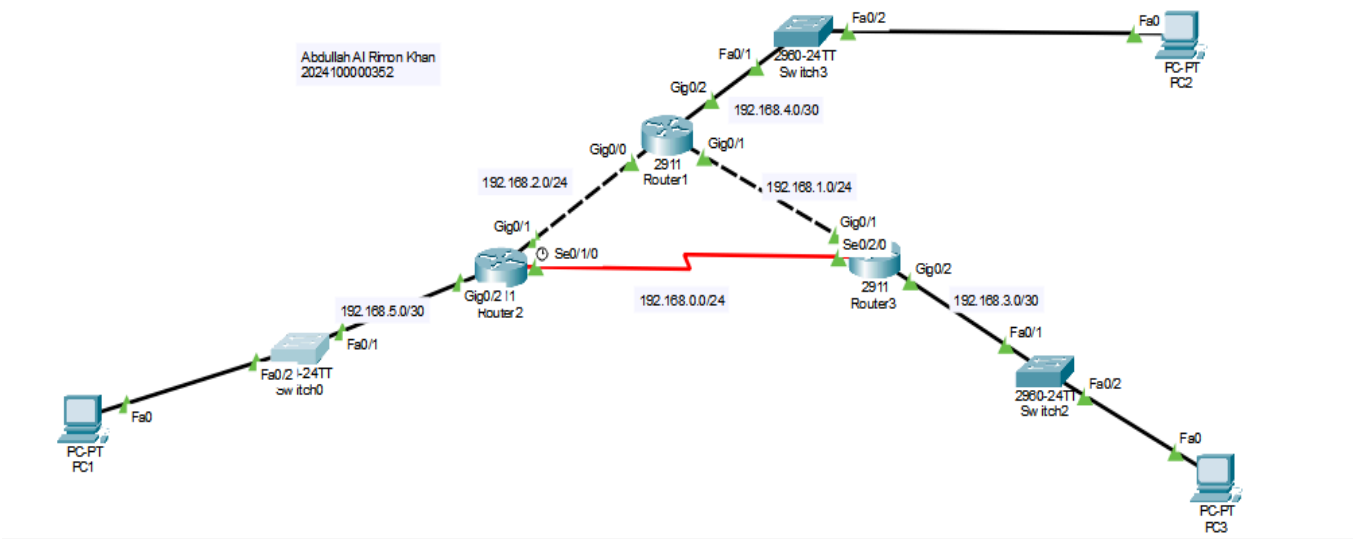

PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.3.2
Pinging 192.168.3.2 with 32 bytes of data:
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Reply from 192.168.3.2: bytes=32 time=1ms TTL=126
Reply from 192.168.3.2: bytes=32 time<1ms TTL=126
Ping statistics for 192.168.3.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms


PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.3.2
Pinging 192.168.3.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.3.2: bytes=32 time<1ms TTL=125
Reply from 192.168.3.2: bytes=32 time<1ms TTL=125
Reply from 192.168.3.2: bytes=32 time<1ms TTL=125
Ping statistics for 192.168.3.2:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms


Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
ip address 192.168.1.2 255.255.255.0
Router(config-if)#ip address 192.168.1.2 255.255.255.0
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/2
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/2, changed state to up
ip address 192.168.4.1 255.255.255.0
Router(config-if)#ip address 192.168.4.1 255.255.255.0
Router(config-if)#ip address 192.168.4.1 255.255.255.252
Router(config-if)#
Router(config-if)#exit
Router(config)#hostname r1
r1(config)#router ospf 1
r1(config-router)#rou
r1(config-router)#router-id 1.1.1.1
r1(config-router)#net
r1(config-router)#network 192.168.2.0 0.0.0.255 area 0
r1(config-router)#network 192.168.4.0 0.0.0.3 area 0
r1(config-router)#network 192.168.1.0 0.0.0.255 area 0
r1(config-router)#exit
r1(config)#


Router3
Physical
Config
CLI
Attributes
IOS Command Line Interface
ip address 192.168.1.1 255.255.255.0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/2
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/2, changed state to up
ip address 192.168.3.1 255.255.255.0
Router(config-if)#ip address 192.168.3.1 255.255.255.252
Router(config-if)#
Router(config-if)#exit
Router(config)#hostname r3
r3(config)#router ospf 1
r3(config-router)#rout
r3(config-router)#router-id 3.3.3.3
r3(config-router)#network 192.168.3.0 0.0.0.3 area 0
r3(config-router)#network 192.168.1.0 0.0.0.255 area 0
r3(config-router)#network 192.168.1.0
00:21:40: %OSPF-5-ADJCHG: Process 1, Nbr 1.1.1.1 on GigabitEthernet0/1 from LOADING to FULL, Loading Done
% Incomplete command.
r3(config-router)#network 192.168.0.0 0.0.0.255 area 0
r3(config-router)#exi
00:22:49: %OSPF-5-ADJCHG: Process 1, Nbr 2.2.2.2 on Serial0/2/0 from LOADING to FULL, Loading Done


Router2
Physical
Config
CLI
Attributes
IOS Command Line Interface
SPF schedule delay 5 secs, Hold time between two SPFs 10 secs
Minimum LSA interval 5 secs. Minimum LSA arrival 1 secs
Number of external LSA 0. Checksum Sum 0x000000
Number of opaque AS LSA 0. Checksum Sum 0x000000
Number of DCbitless external and opaque AS LSA 0
Number of DoNotAge external and opaque AS LSA 0
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
External flood list length 0
Area BACKBONE(0)
Number of interfaces in this area is 3
Area has no authentication
SPF algorithm executed 6 times
Area ranges are
Number of LSA 5. Checksum Sum 0x0372bd
Number of opaque link LSA 0. Checksum Sum 0x000000
Number of DCbitless LSA 0
Number of indication LSA 0
Number of DoNotAge LSA 0
Flood list length 0
r2#show ip ospf d
r2#show ip ospf database
OSPF Router with ID (2.2.2.2) (Process ID 1)
Router Link States (Area 0)
Link ID ADV Router Age Seq# Checksum Link count
1.1.1.1 1.1.1.1 764 0x80000005 0x00917a 3
2.2.2.2 2.2.2.2 695 0x80000005 0x00cf9c 4
3.3.3.3 3.3.3.3 695 0x80000005 0x00e288 4
Net Link States (Area 0)
Link ID ADV Router Age Seq# Checksum
192.168.2.1 1.1.1.1 1006 0x80000001 0x00f363
192.168.1.2 1.1.1.1 764 0x80000002 0x003bbc
r2#


Abdullah Al Rimon Khan
2024100000352
Fa0/2
Fa0
Fa0/1
2960-24TT
Switch3
PC-PT
PC2
Gig0/2
192.168.4.0/30
Gig0/0
Gig0/1
2911
Router1
192.168.2.0/24
192.168.1.0/24
Gig0/1
Gig0/1
Se0/2/0
Se0/1/0
Gig0/2
2911
Router3
Gig0/2 I1
Router2
192.168.0.0/24
192.168.3.0/30
192.168.5.0/30
Fa0/1
Fa0/1
Fa0/2 -24TT
Switch0
2960-24TT
Switch2
Fa0/2
Fa0
Fa0
PC-PT
PC1
PC-PT
PC3