192.168.2.11/24

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.11

Pinging 192.168.2.11 with 32 bytes of data:

Reply from 192.168.2.11: bytes=32 time=5ms TTL=128
Reply from 192.168.2.11: bytes=32 time=4ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time=2ms TTL=128

Ping statistics for 192.168.2.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 2ms

C:\>
```

192.168.1.12/24

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.12

Pinging 192.168.1.12 with 32 bytes of data:

Reply from 192.168.1.12: bytes=32 time=5ms TTL=128
Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Reply from 192.168.1.12: bytes=32 time=3ms TTL=128
Reply from 192.168.1.12: bytes=32 time=3ms TTL=128

Ping statistics for 192.168.1.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 5ms, Average = 2ms

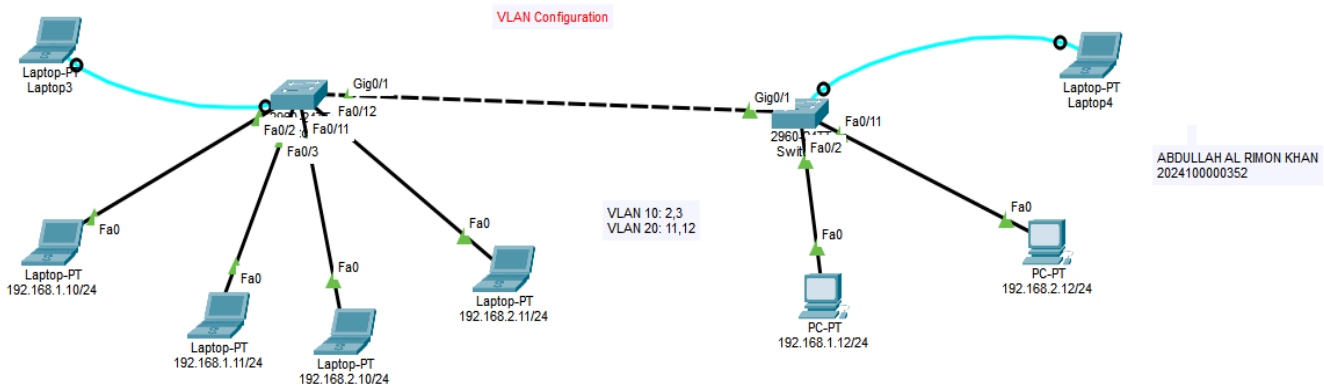
C:\>ping 192.168.1.10

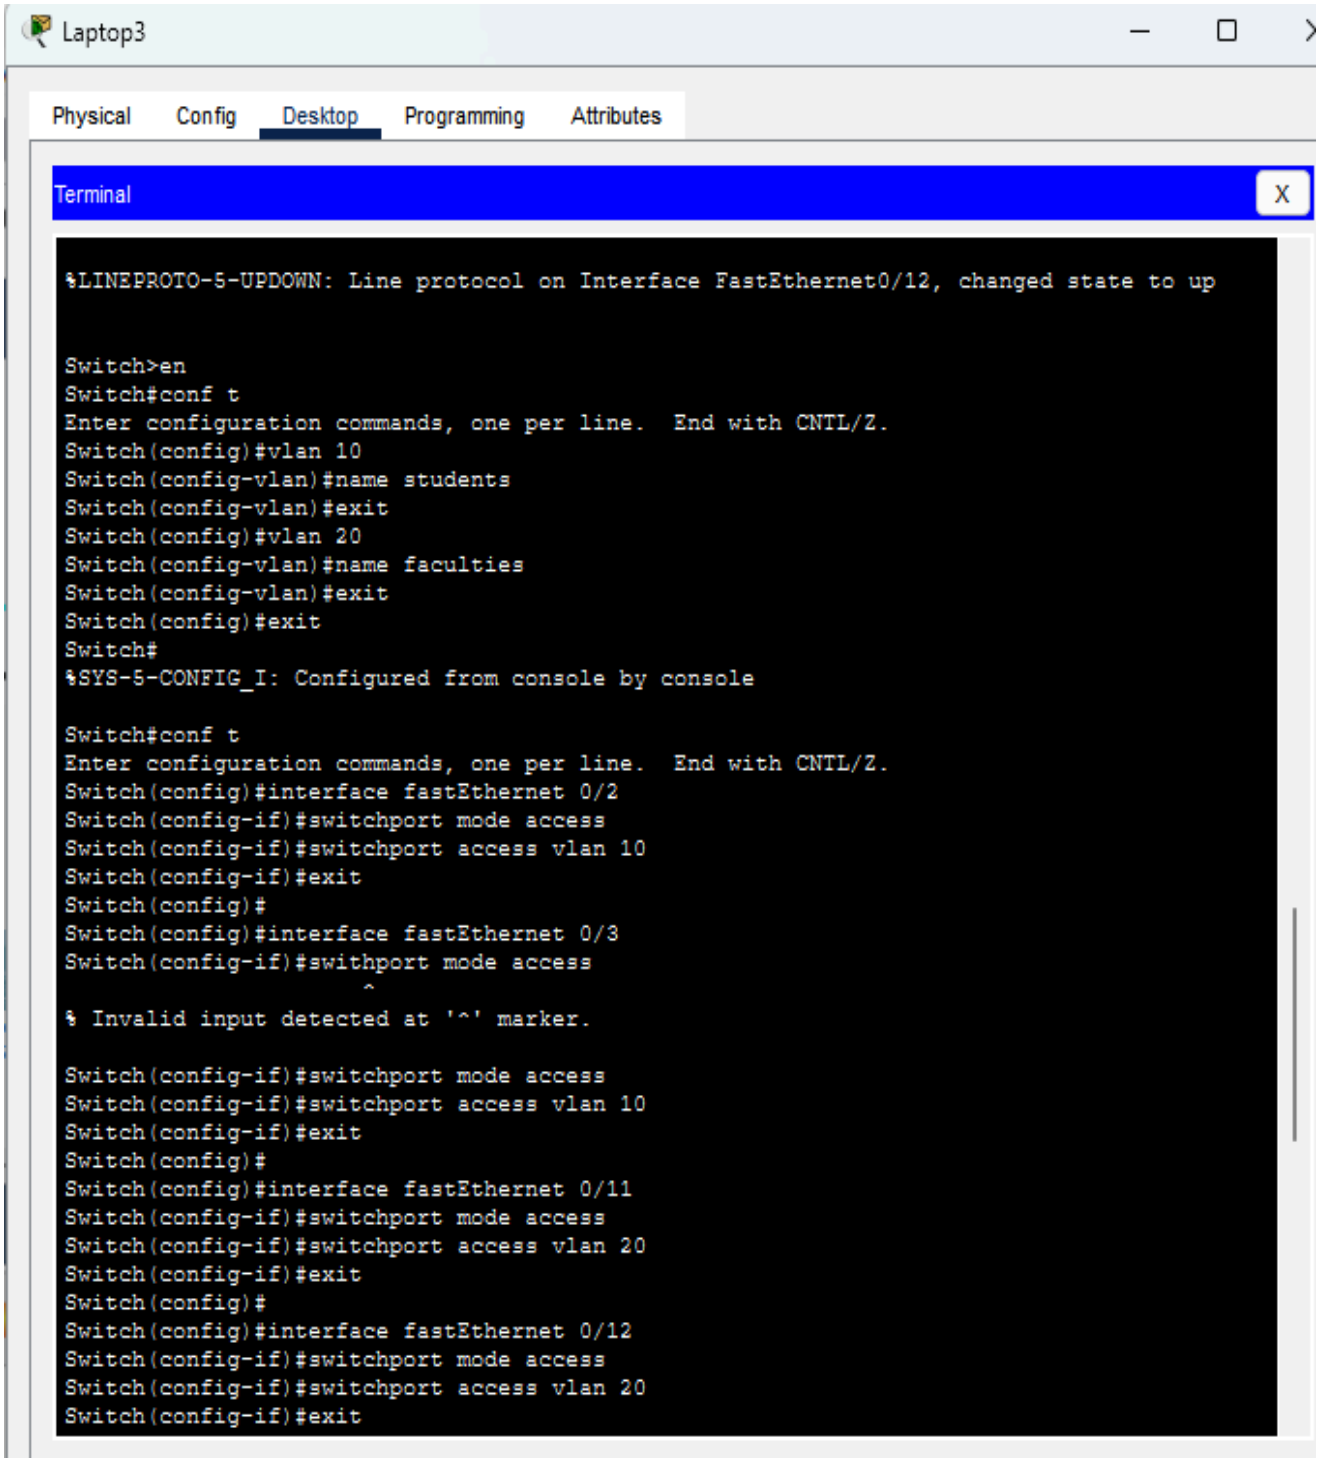
Pinging 192.168.1.10 with 32 bytes of data:

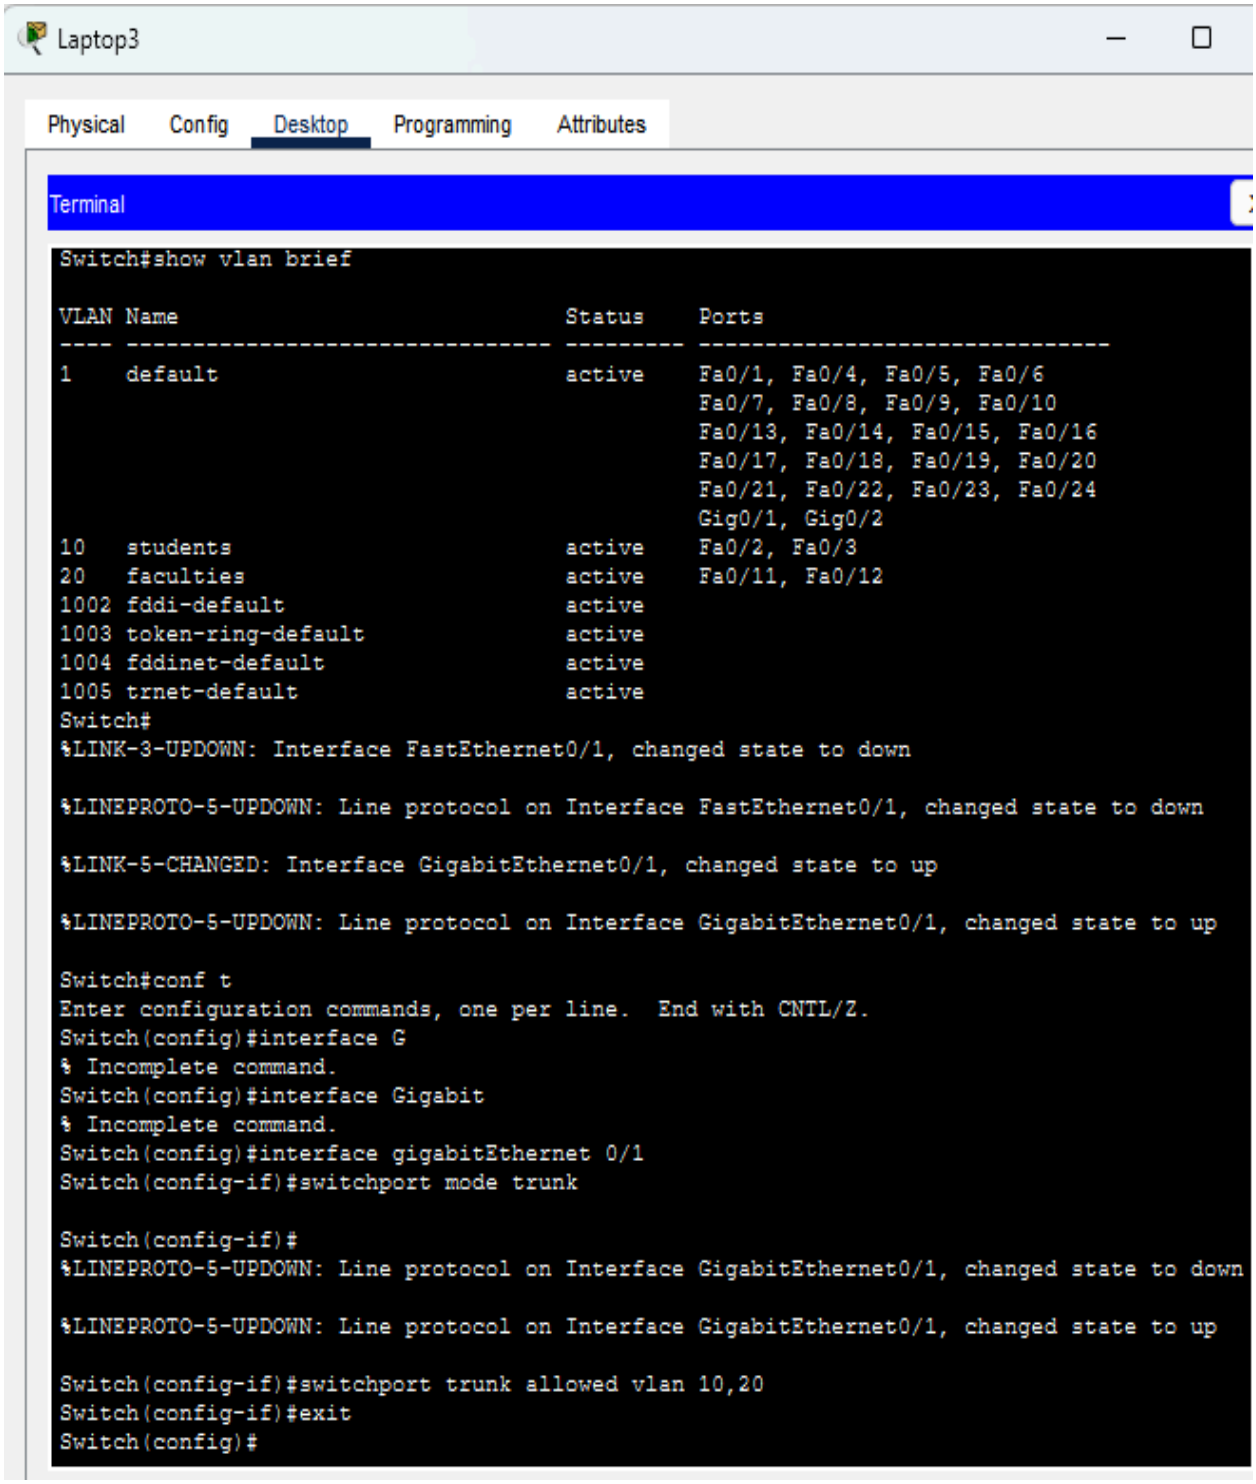
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128

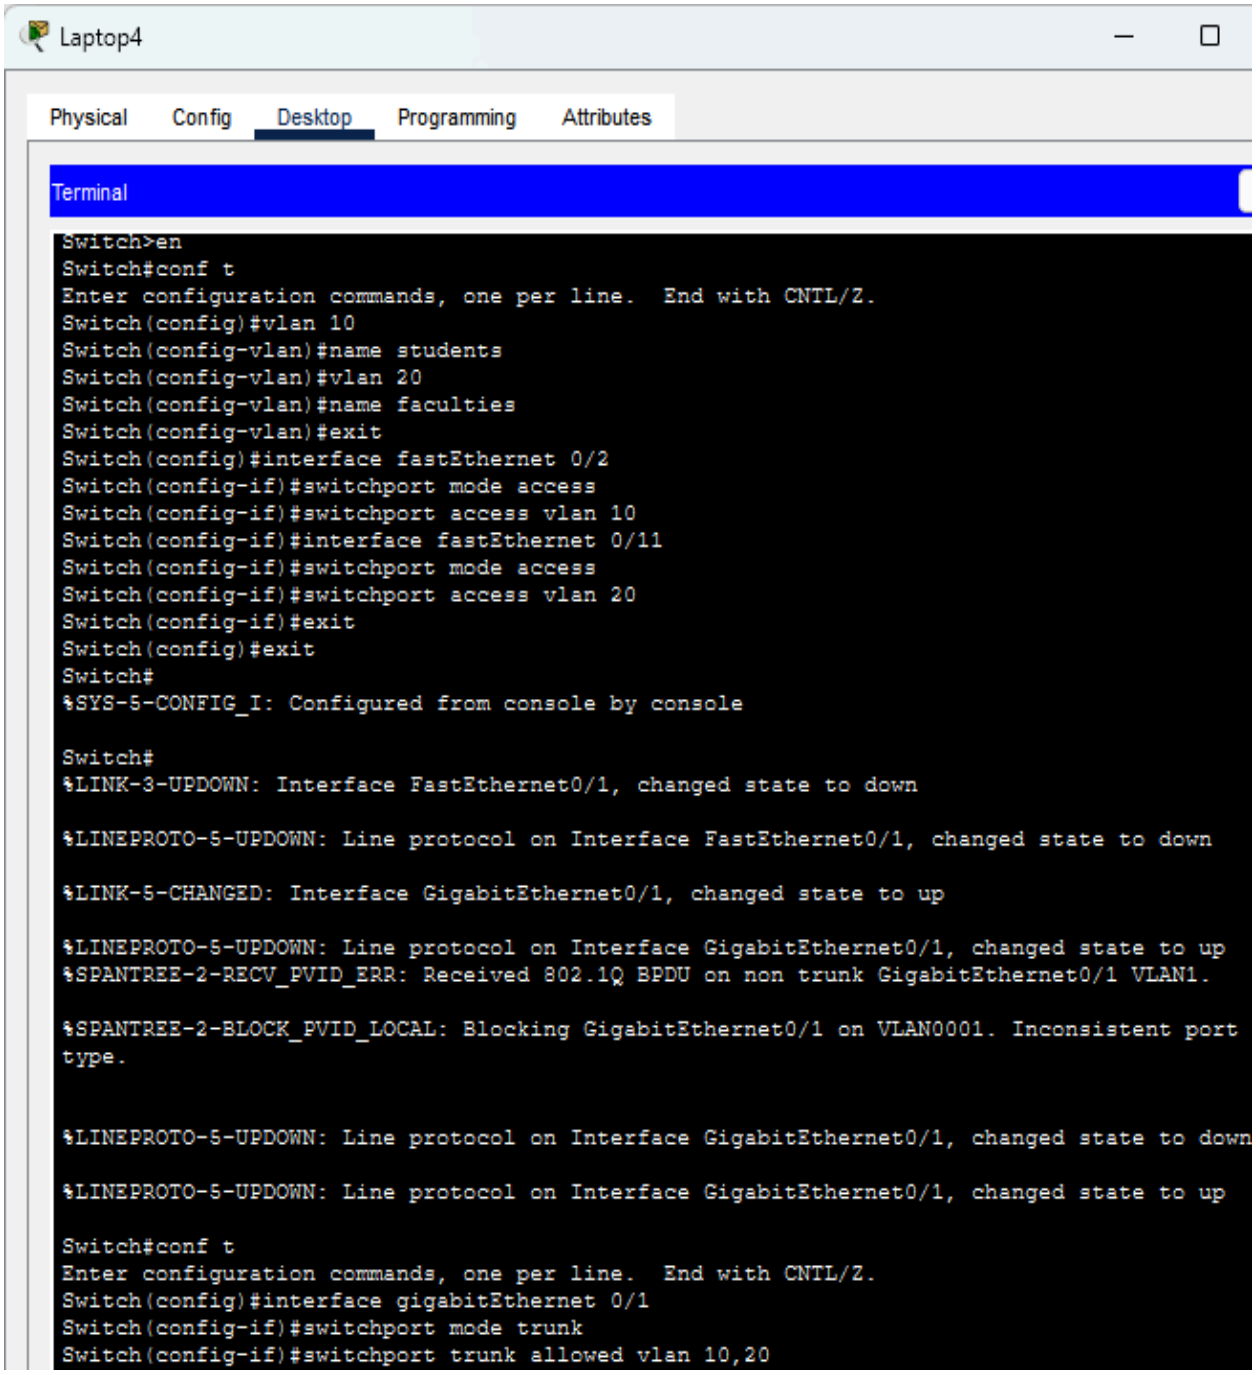
Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

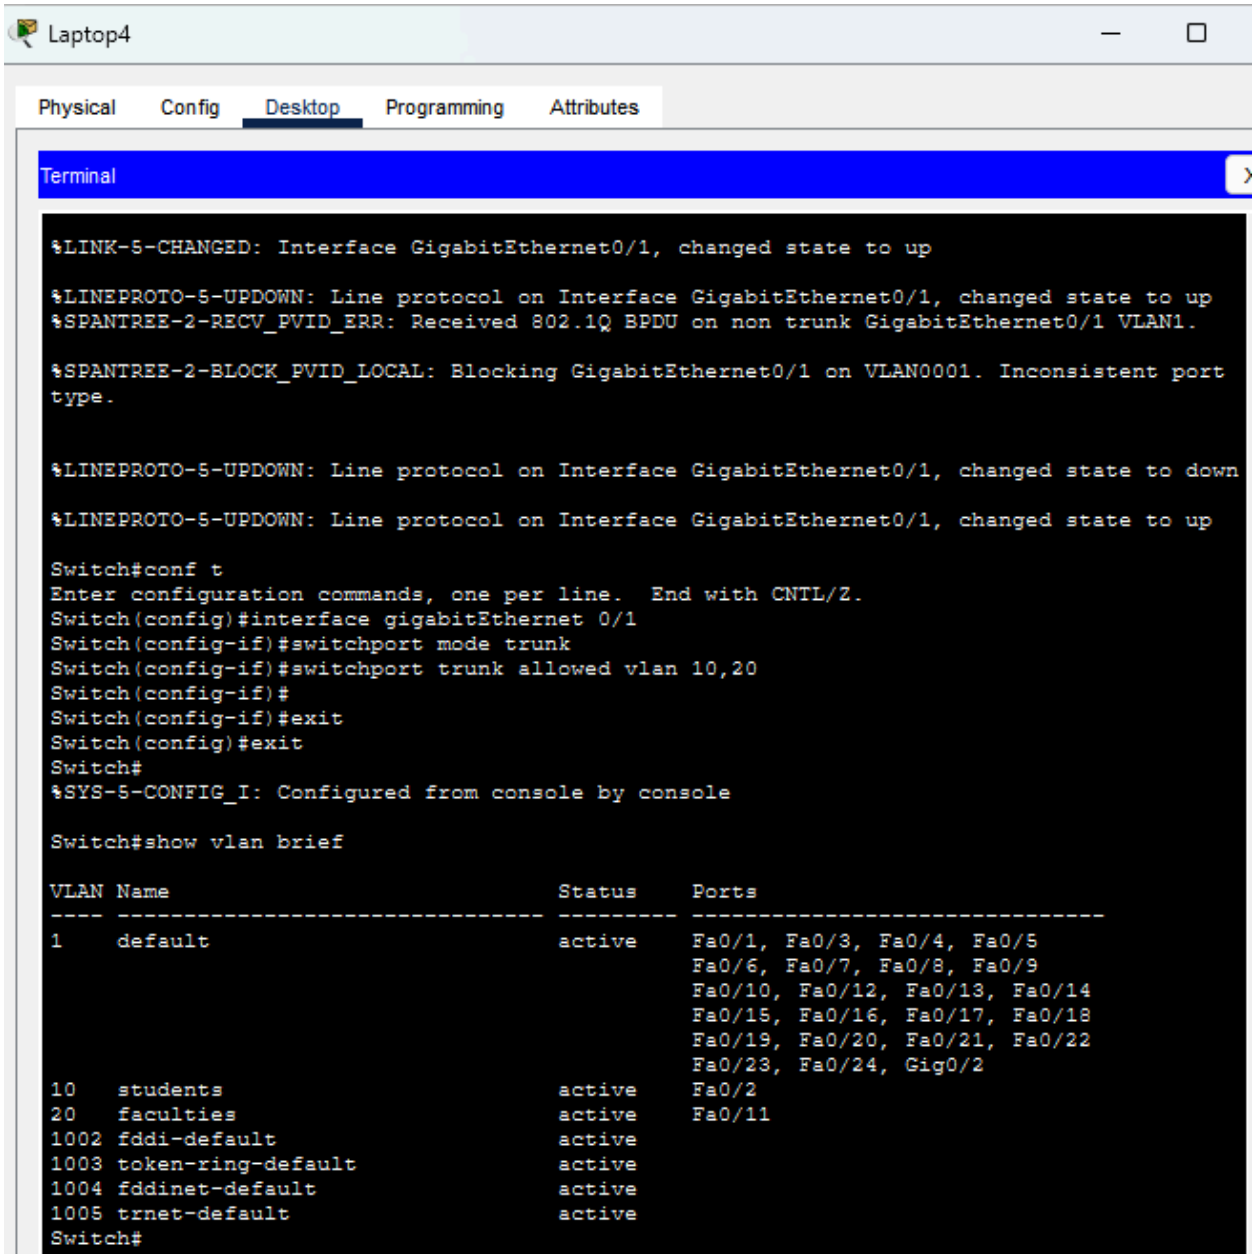
C:\>
```


VLAN Configuration
Laptop-PT
Laptop3
Gig0/1
Fa0/12
Fa0/2
Fa0/11
Fa0/3
Gig0/1
Fa0/11
Fa0/2
Laptop-PT
Laptop4
ABDULLAH AL RIMON KHAN
2024100000352
Fa0
Laptop-PT
192.168.1.10/24
Fa0
Laptop-PT
192.168.1.11/24
Fa0
Laptop-PT
192.168.2.10/24
Fa0
Laptop-PT
192.168.2.11/24
VLAN 10: 2,3
VLAN 20: 11,12
Fa0
PC-PT
192.168.1.12/24
Fa0
PC-PT
192.168.2.12/24


Laptop3
Physical
Config
Desktop
Programming
Attributes
Terminal
X
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/12, changed state to up
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name students
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name faculties
Switch(config-vlan)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#
Switch(config)#interface fastEthernet 0/3
Switch(config-if)#swithport mode access
^
% Invalid input detected at '^' marker.
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#
Switch(config)#interface fastEthernet 0/11
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#
Switch(config)#interface fastEthernet 0/12
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit


Laptop3
Physical
Config
Desktop
Programming
Attributes
Terminal
Switch#show vlan brief
VLAN Name Status Ports
1 default active Fa0/1, Fa0/4, Fa0/5, Fa0/6
Fa0/7, Fa0/8, Fa0/9, Fa0/10
Fa0/13, Fa0/14, Fa0/15, Fa0/16
Fa0/17, Fa0/18, Fa0/19, Fa0/20
Fa0/21, Fa0/22, Fa0/23, Fa0/24
Gig0/1, Gig0/2
10 students active Fa0/2, Fa0/3
20 faculties active Fa0/11, Fa0/12
1002 fddi-default active
1003 token-ring-default active
1004 fddinet-default active
1005 trnet-default active
Switch#
%LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface G
% Incomplete command.
Switch(config)#interface Gigabit
% Incomplete command.
Switch(config)#interface gigabitEthernet 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Switch(config-if)#switchport trunk allowed vlan 10,20
Switch(config-if)#exit
Switch(config)#


Laptop4
Physical
Config
Desktop
Programming
Attributes
Terminal
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name students
Switch(config-vlan)#vlan 20
Switch(config-vlan)#name faculties
Switch(config-vlan)#exit
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#interface fastEthernet 0/11
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#
%LINK-3-UPDOWN: Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk GigabitEthernet0/1 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking GigabitEthernet0/1 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface gigabitEthernet 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 10,20


Laptop4
Physical
Config
Desktop
Programming
Attributes
Terminal
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk GigabitEthernet0/1 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking GigabitEthernet0/1 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface gigabitEthernet 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 10,20
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#show vlan brief
VLAN Name Status Ports
1 default active Fa0/1, Fa0/3, Fa0/4, Fa0/5
Fa0/6, Fa0/7, Fa0/8, Fa0/9
Fa0/10, Fa0/12, Fa0/13, Fa0/14
Fa0/15, Fa0/16, Fa0/17, Fa0/18
Fa0/19, Fa0/20, Fa0/21, Fa0/22
Fa0/23, Fa0/24, Gig0/2
10 students active Fa0/2
20 faculties active Fa0/11
1002 fddi-default active
1003 token-ring-default active
1004 fddinet-default active
1005 trnet-default active
Switch#