
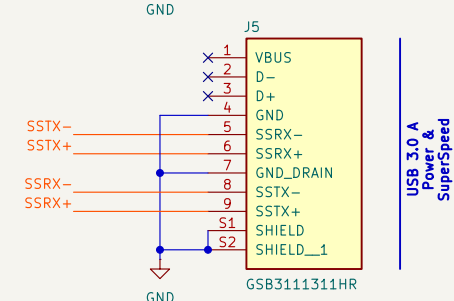
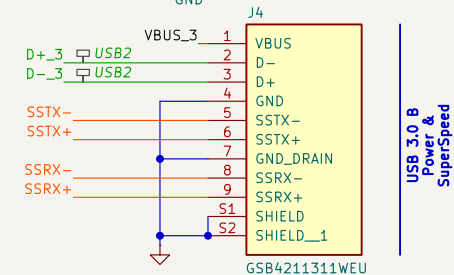
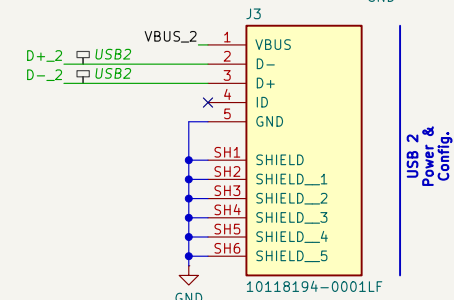
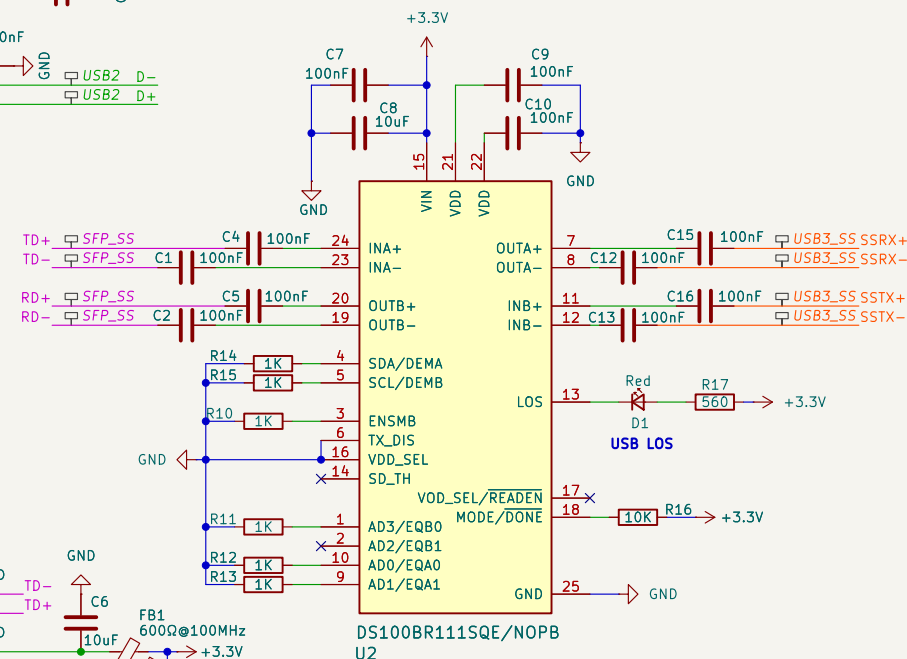
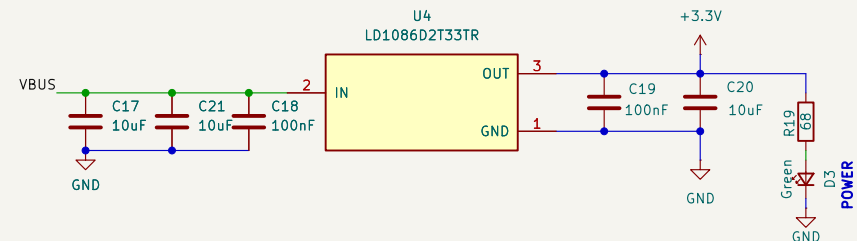

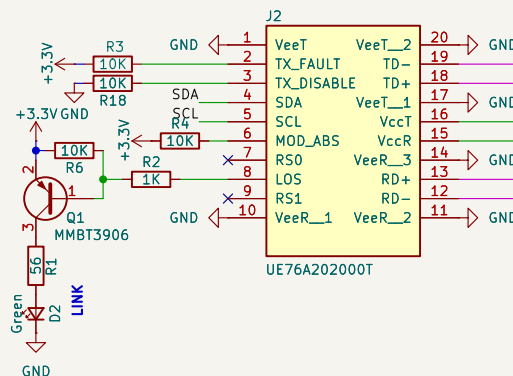



USB3_SS 0.2mm trace, 0.2mm diff gap, 0.2mm clearance (100R diff)
SSTX+, SSTX-, SSRX+, SSRX-

USB2 0.2mm trace, 0.15mm diff gap, 0.15mm clearance (90R diff)
D+, D-, D+_2, D-_2, D+_3, D-_3

Power 0.5mm trace, 0.8mm via, 0.2mm clearance
VBUS, VBUS_2, VBUS_3, +3.3V, VUSB, GND

Default 0.2mm trace, 0.2mm clearance
I2C (SDA, SCL), GPIO, TX_DIS_MCU, RX_LOS_MCU

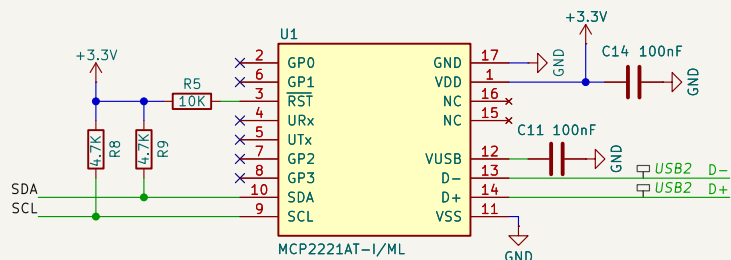

FID1 Fiducial	FID3 FiducialMountingHole	H1 MountingHole	H3 MountingHole
			
FID2 Fiducial	FID4 FiducialMountingHole	H2 MountingHole	H4 MountingHole

Repo: github.com/ringof/usb3-fiber

Designer: David Goncalves		Commit: local	OSH Licence: CERN-OHL-P-2.0
Size: A4	Date: 2026-03-13		Rev: DEV
Sheet: /	File: usb3_fiber.kicad_sch		Page 1 of 1