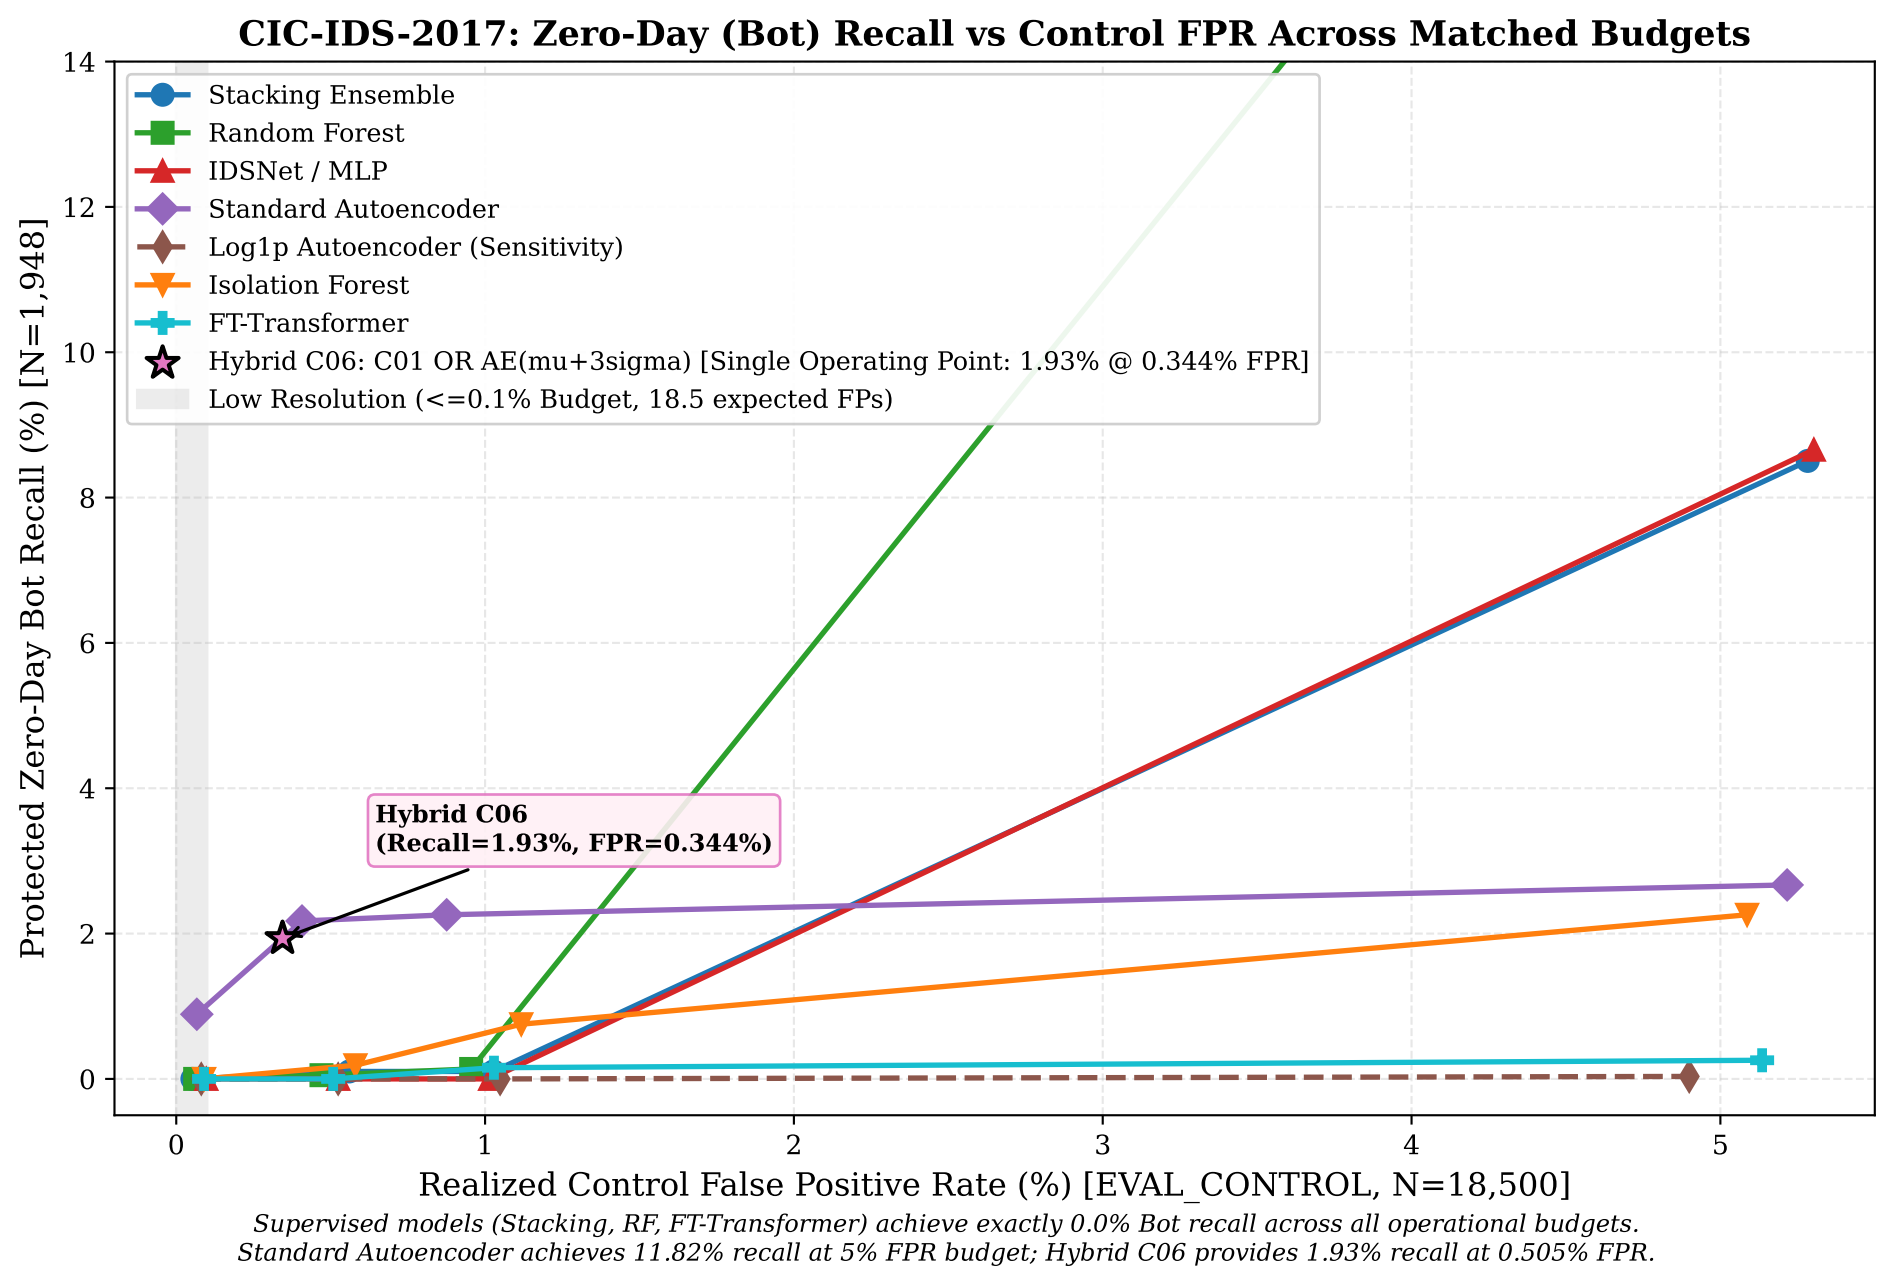


Supervised models (Stacking, RF, FT-Transformer) achieve exactly 0.0% Bot recall across all operational budgets.
Standard Autoencoder achieves 11.82% recall at 5% FPR budget; Hybrid C06 provides 1.93% recall at 0.505% FPR.