


SHOGUN-F401 REV1

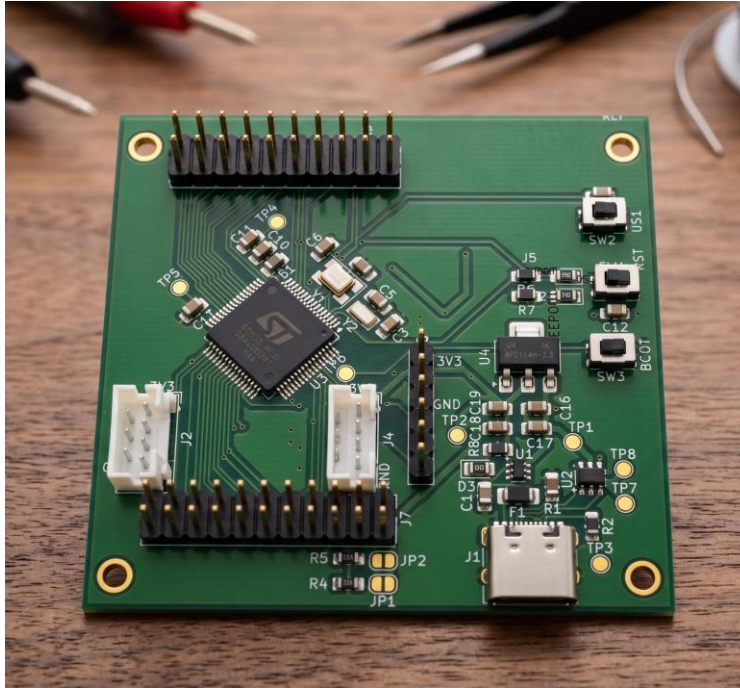

The Concept: SHOGUN-F401 REV1 is a compact, field-deployable compute module engineered to bridge the gap between educational development boards and commercial hardware.

The Mission: It eliminates the unreliability of breadboard prototyping by prioritizing robust, plug-and-play peripheral integration for real-world projects.

High-Yield 1A 3.3V Power: Standard dev boards use weak regulators that brown-out when powering heavy loads. Our robust 1A LDO acts as a power backbone, safely driving power-hungry external modules (like Wi-Fi or cellular) directly from the board.

JST Connectors (I2C/UART): Replaces loose, fragile jumper wires with secure, vibration-resistant plug-and-play connections for external sensors and communication peripherals.

Integrated Micro SD Storage: Placed optimally on the bottom layer to save space, providing immediate, high-volume offline data logging capabilities out of the box.

Precision Timing: Dual external oscillators (HSE and RTC/LSE) ensure exact synchronization for critical real-time edge computing operations.

The Market Gap: Standard market boards (like standard Nucleos) are too bulky for final enclosures and rely on fragile headers, while bare ICs take too much time to implement.

The SHOGUN-F401 Solution: We deliver the processing power of the Cortex-M4, the physical reliability of industrial JST connections, and a massive 1A power reserve in a highly compact, deployment-ready footprint.