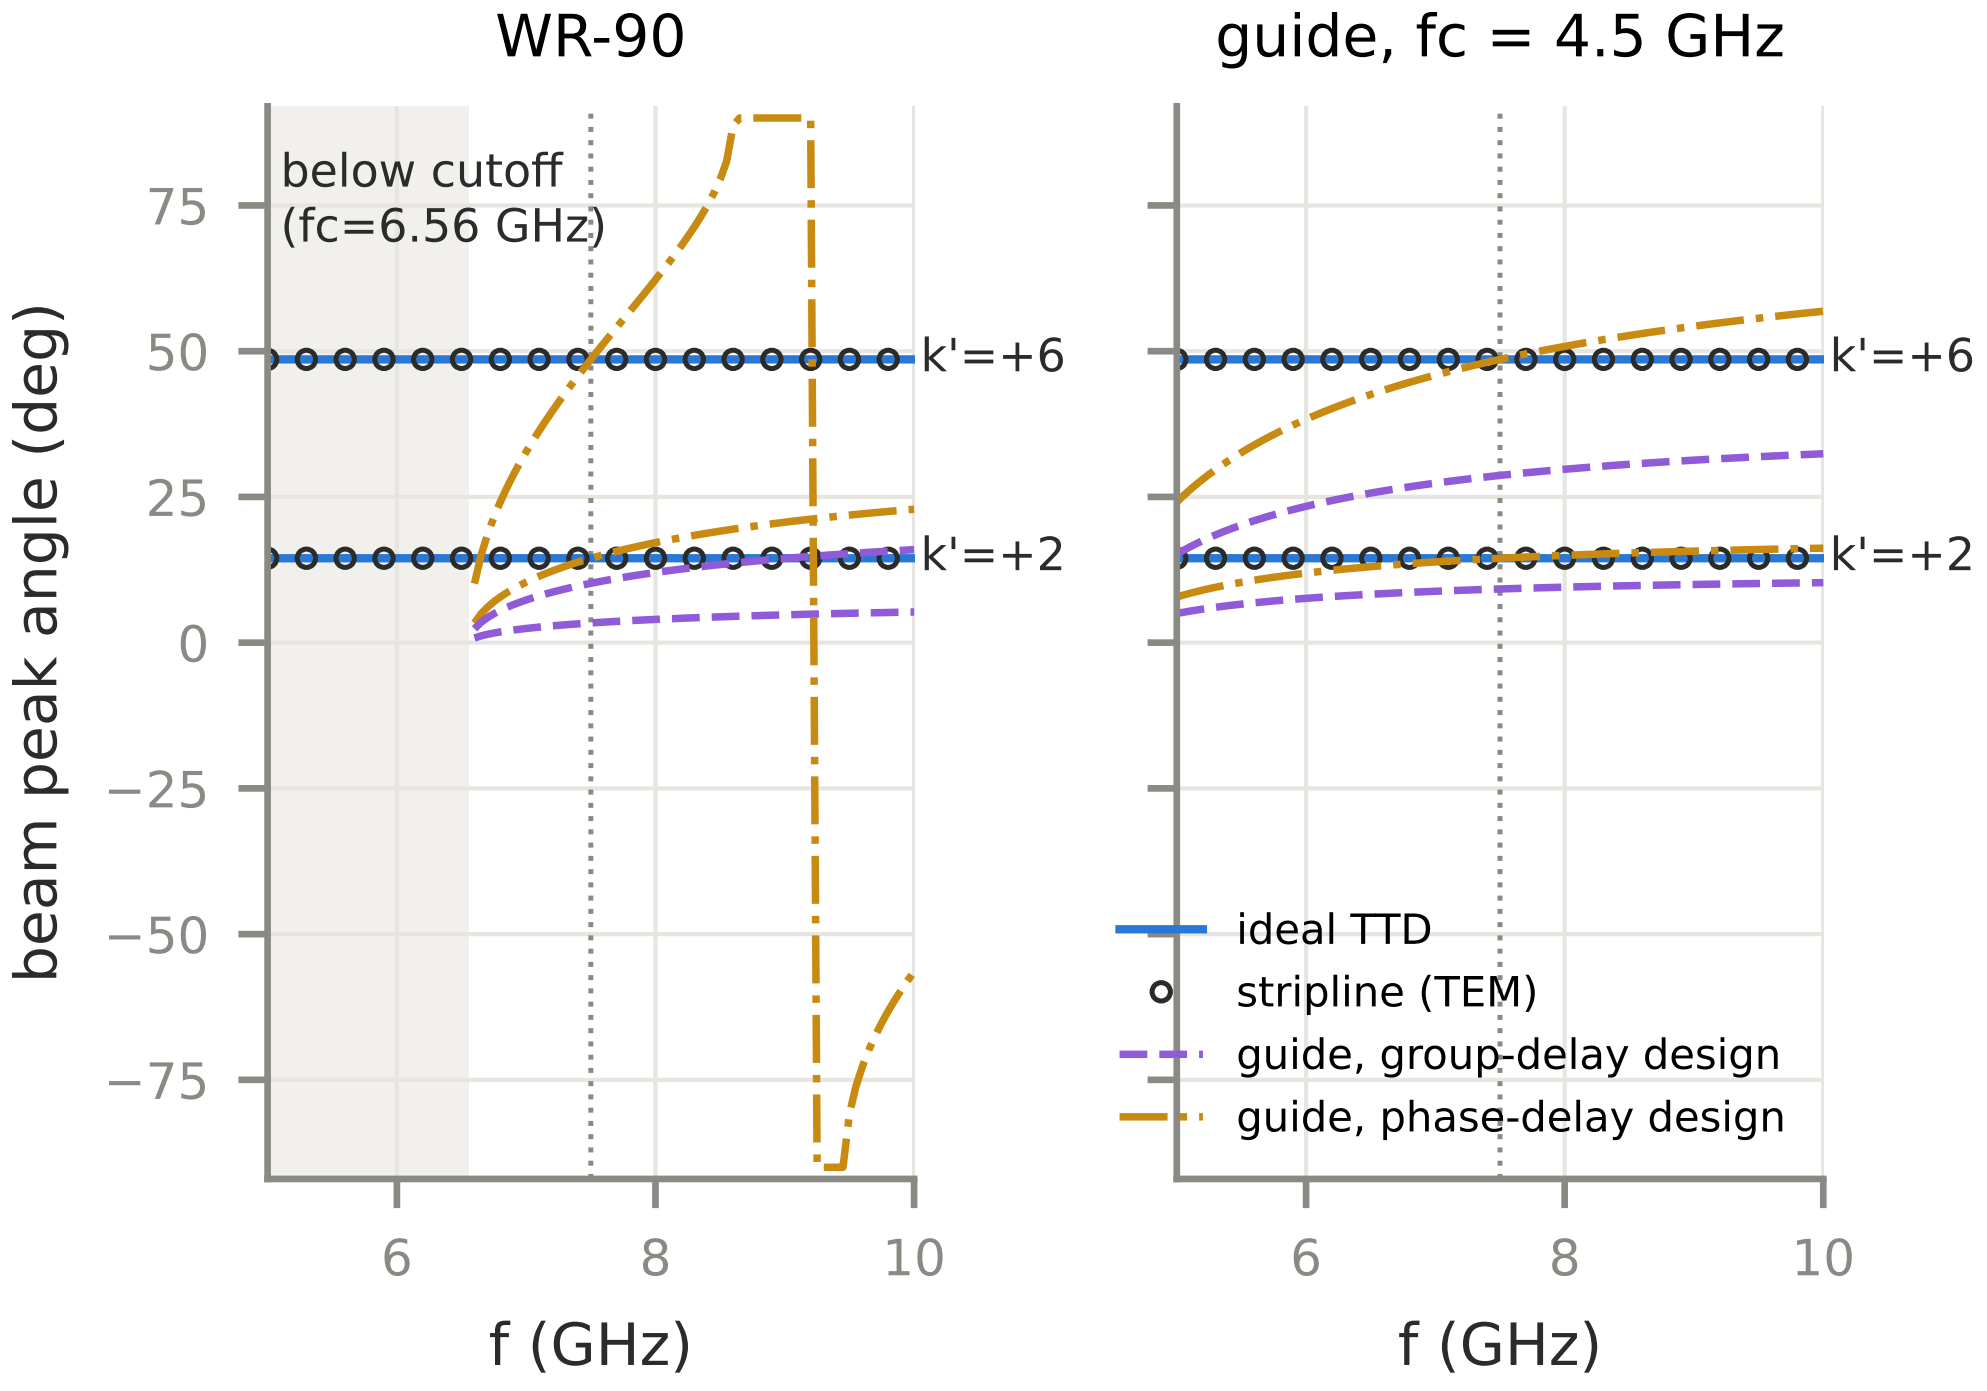
WR-90
guide, fc = 4.5 GHz
below cutoff
(fc=6.56 GHz)
beam peak angle (deg)
75
50
25
0
−25
−50
−75
k'=+6
k'=+2
6
8
10
f (GHz)
ideal TTD
stripline (TEM)
guide, group-delay design
guide, phase-delay design