



The purifier that **measures its own cleaning power.**

AdaptAir knows its real-world condition — actual CADR, filter loading, sensor bias — and knows why the air got dirty, using only the sensors it already carries. Everything runs on a single ESP32.



≥ 20%

LESS ENERGY THAN AUTO-MODE

< 35

MG/M³ PM2.5 TARGET (USEPA)

10–30

MIN PM2.5 FORECAST AHEAD

830

MM SLIM TOWER DESIGN

Why **AdaptAir**?



Self-calibrating CADR

Fits PM2.5 decay after every clean-down and updates its real cleaning rate — live, in your room.



Real filter health


Fuses INA219 power signatures with measured CADR — separates a clogging filter from a leaky room.



Source-aware control

Reed-switch door events vs CO₂ + particle size bins — incense gets a burst, a door gets a boost.

How it works — the **AdaptAir loop**

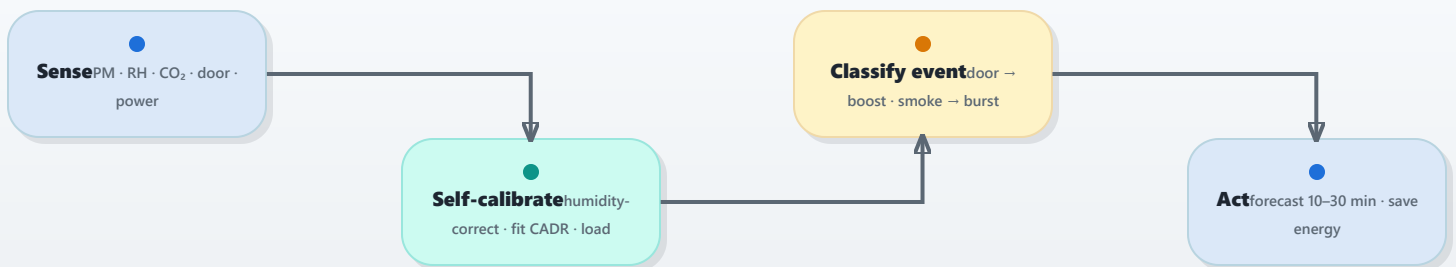

PMS5003

laser PM1 / PM2.5 / PM10

BME280

temp · humidity · pressure

SCD40

true NDIR CO₂

INA219

inline current / power

Reed switch

door-open detection

Where **AdaptAir** fits the market

\$579M

INDIA MARKET '25

13.5%

ANNUAL GROWTH

<5%

HOMES OWN ONE

₹10–15K

SMART SEGMENT

≥20%

LESS ENERGY THAN
AUTO-MODE