



SS
MOSI support SPI
MISO
SCK

SCL support I2c "with wire library"
SDA

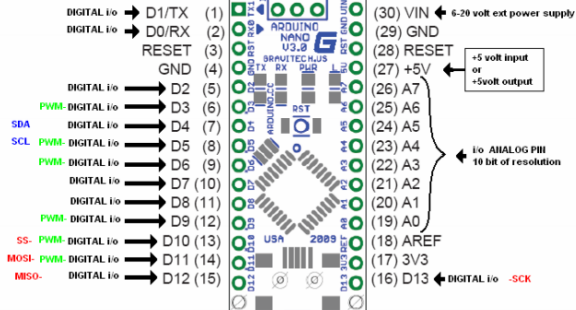

PWM is only analogWrite value, pinmode=OUTPUT
PWM 8 BIT of resolution

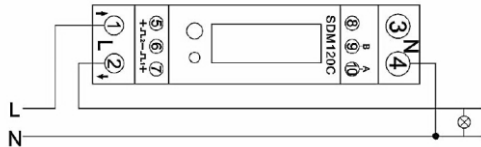

1: L-in 2: L-out 3/4: N 5/6/7: PO 2+ / Com / PO 1+ 9/10: RS485 B/A

