BOROFLOAT® 33 – Thermal Properties

The sum of its properties is what makes it unique.

BOROFLOAT® 33 from Germany is the world's first floated borosilicate flat glass. It combines superior quality and excellent flatness with outstanding thermal, optical, chemical and mechanical features. The chemical composition and physical values of BOROFLOAT® 33 are in accordance with DIN ISO 3585 and DIN EN 1748 T1. Rediscover BOROFLOAT® 33 and experience the infinite potential of our most versatile material platform. BOROFLOAT® – Inspiration through Quality.

Thermally resistant oven door made with BOROFLOAT® 33.

Key benefits:

Outstanding thermal resistance

- Very good temperature stability
- Excellent resistance to thermal shock
- Can be thermally toughened
- Can be thermally shaped (3D)

Thermal properties	
Specific heat capacity c_p (20–100 °C)	0.83 kJ/(kg·K)
Thermal conductivity λ (90 °C)	1.2 W/(m·K)
Transformation temperature T_g* (according to ISO 7884)	525 °C

* Equivalent term: glass transition temperature.

Maximum Operating Temperature	
For short-term usage (< 10 h)	500 °C
For long-term usage (≥ 10 h)	450 °C

Coefficient of Linear Thermal Expansion (CTE)

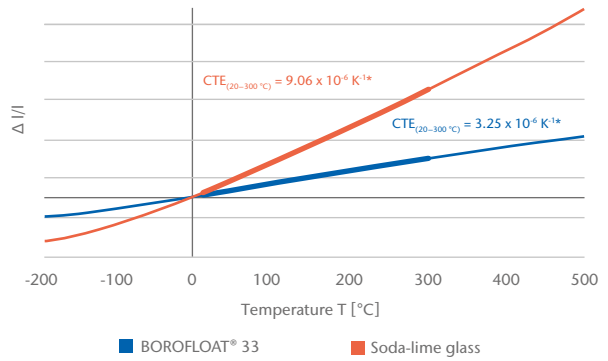

* According to ISO 7991.

The CTE of BOROFLOAT® 33 is 3 times lower than the CTE of Soda-lime glass.

Viscosity of BOROFLOAT® 33

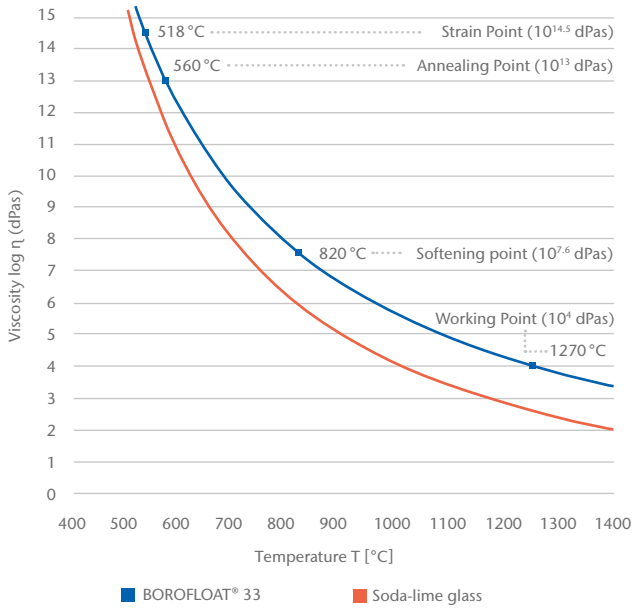

Further data and information available on request.
All values listed on the data sheet are not guaranteed reference values.

SCHOTT Technical Glass Solutions GmbH
Otto-Schott-Strasse 13
07745 Jena
Germany
Telefon +49 (0) 3641/681-4686
Telefax +49 (0) 3641/2888-9241

info.borofloat@schott.com

SCHOTT
glass made of ideas