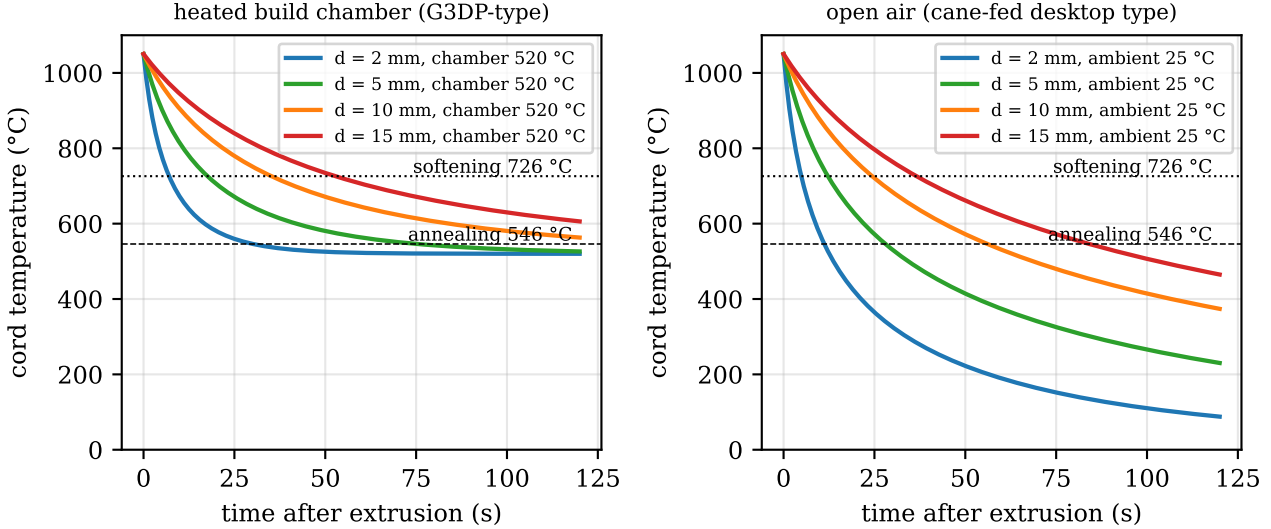
heated build chamber (G3DP-type)
d = 2 mm, chamber 520 °C
d = 5 mm, chamber 520 °C
d = 10 mm, chamber 520 °C
d = 15 mm, chamber 520 °C
softening 726 °C
annealing 546 °C
cord temperature (°C)
time after extrusion (s)
0
200
400
600
800
1000
0
25
50
75
100
125
open air (cane-fed desktop type)
d = 2 mm, ambient 25 °C
d = 5 mm, ambient 25 °C
d = 10 mm, ambient 25 °C
d = 15 mm, ambient 25 °C
softening 726 °C
annealing 546 °C
cord temperature (°C)
time after extrusion (s)