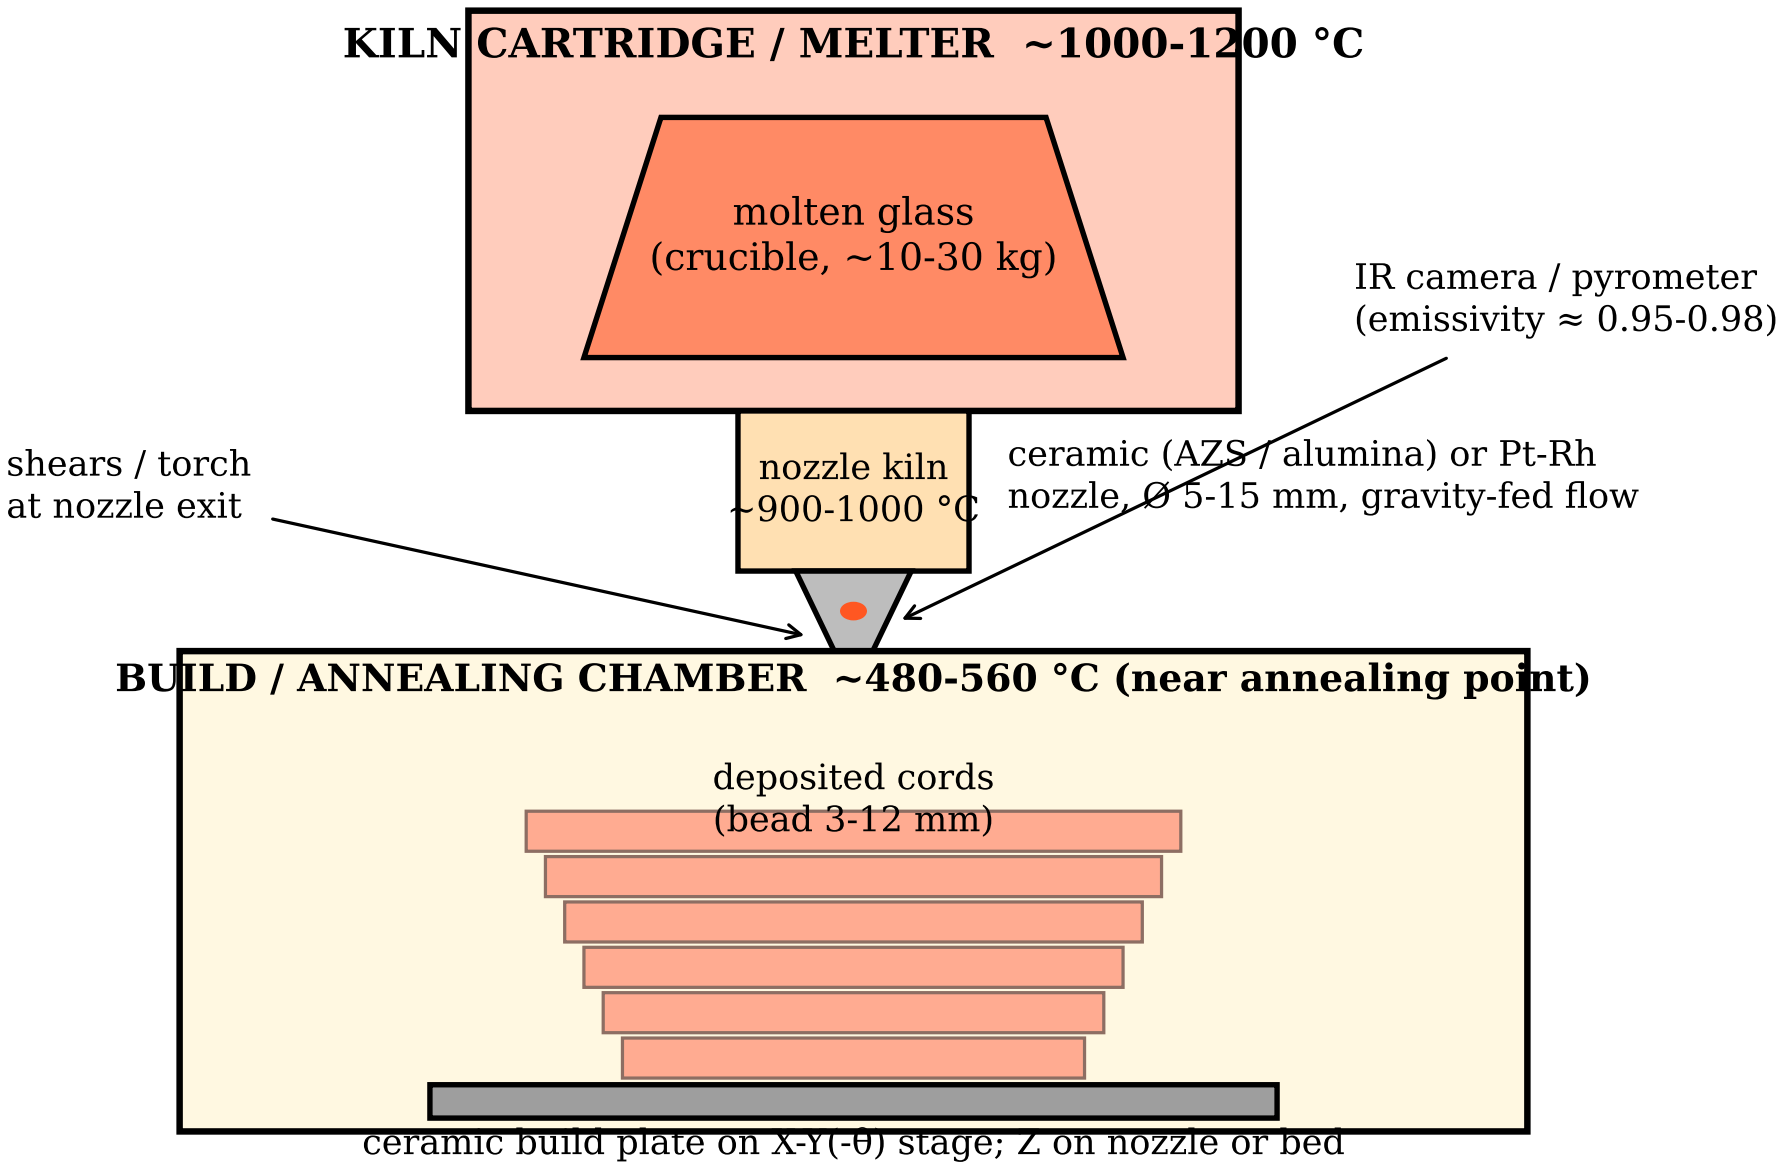Three thermal zones (melter, nozzle, build chamber) are controlled independently;
print bed motion sets cord placement while flow rate is set by melt head and nozzle temperature.