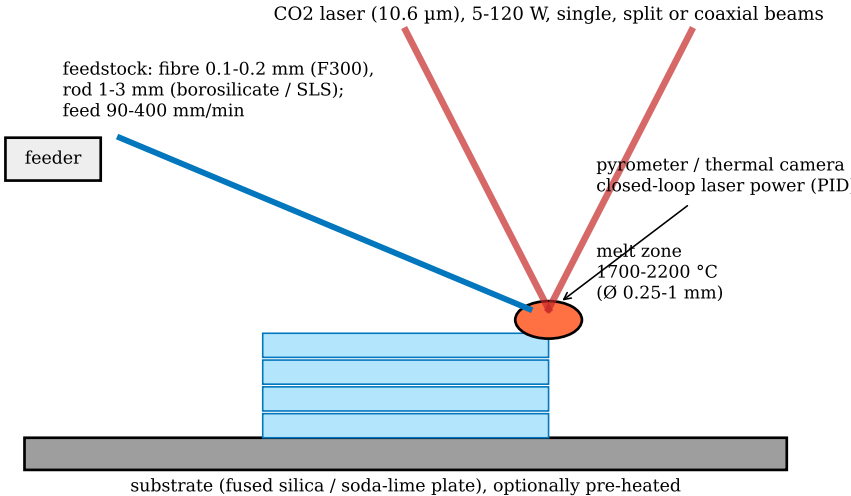Non-contact laser heating removes the nozzle-corrosion limit and reaches fused-silica working temperatures; the price is a millimetre-scale melt zone, low deposition rate and steep thermal gradients (stress, bubbles, striae).