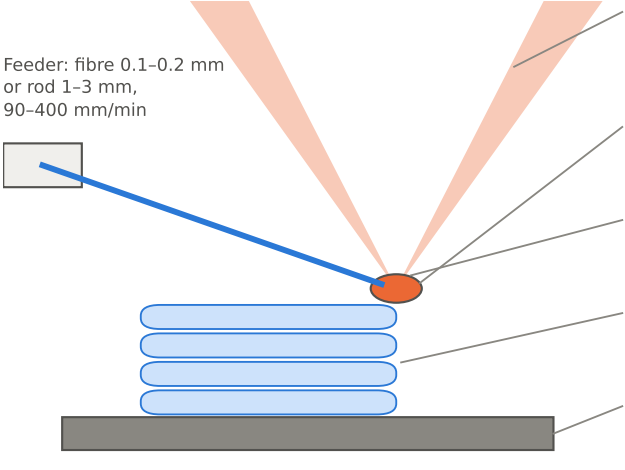

CO_2 laser beams, 10.6 µm

2–120 W; lateral, four-beam or coaxial ring;
absorbed at the glass surface, no nozzle contact

Melt zone

1700–2200 °C for fused silica, 0.25–1 mm across

Pyrometer or thermal camera

melt temperature fed back to laser power

Deposited tracks

0.2 mm layers; fully dense, transparent

Substrate on a motion stage

fused quartz or float glass, optionally preheated