


Scenario 1 — Setting Up a Smart Campus Network

Wi-Fi + wired design, end-user device to internet gateway.

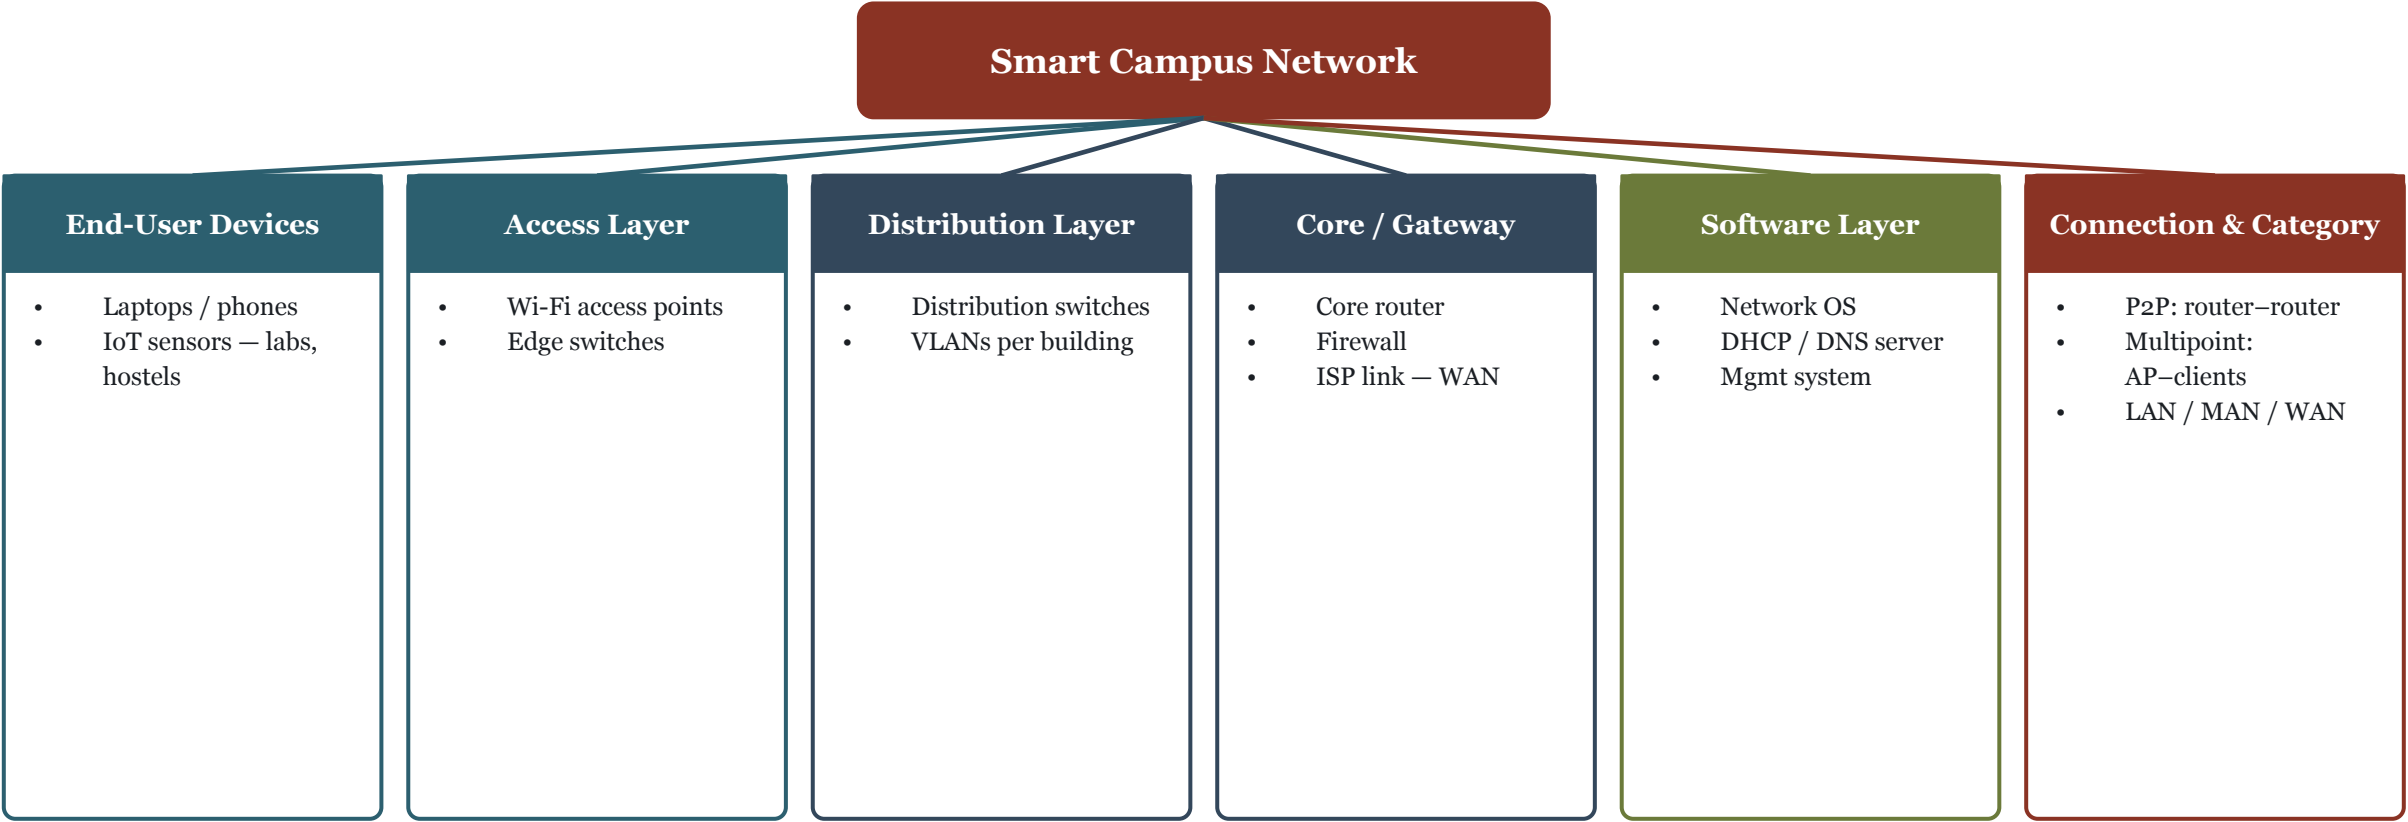


Source A (textbook — hardware/software classification): _____

Source B (vendor whitepaper / IEEE campus design doc): _____

Mark on map: where the two sources' hardware/software split, or LAN–MAN–WAN boundaries, align or differ.

Scenario 2 — Diagnosing a Video Call Failure

Sender-to-receiver journey across both models; failure points flagged.

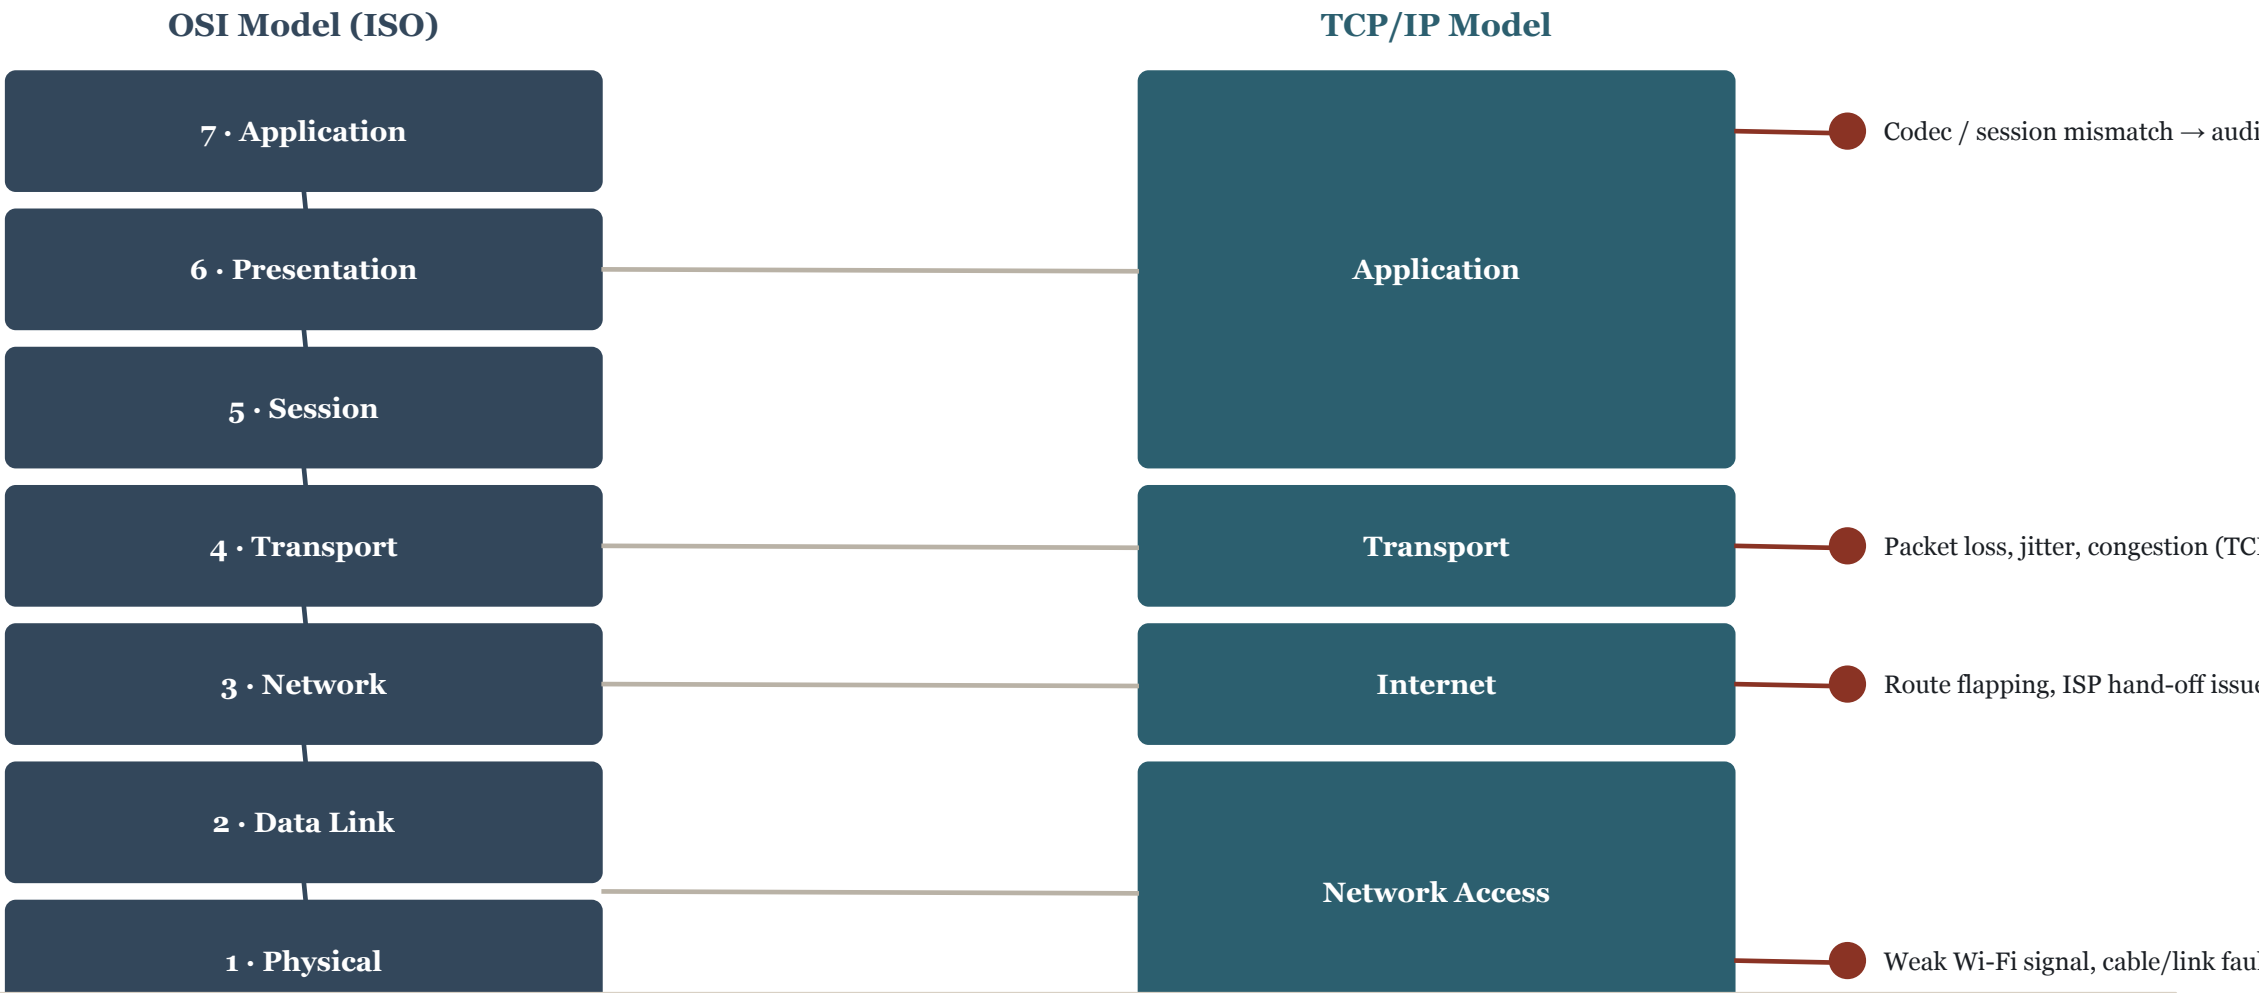


Source A (textbook — OSI/TCP-IP treatment): _____

Source B (RFC / ITU-T recommendation): _____

Mark on map: where the two sources disagree on layer boundaries (e.g. session/presentation folded into TCP/IP's Application layer).

Scenario 3 — Choosing a Topology for a New Startup Office

30-employee office; cost, fault tolerance & scalability trade-offs.

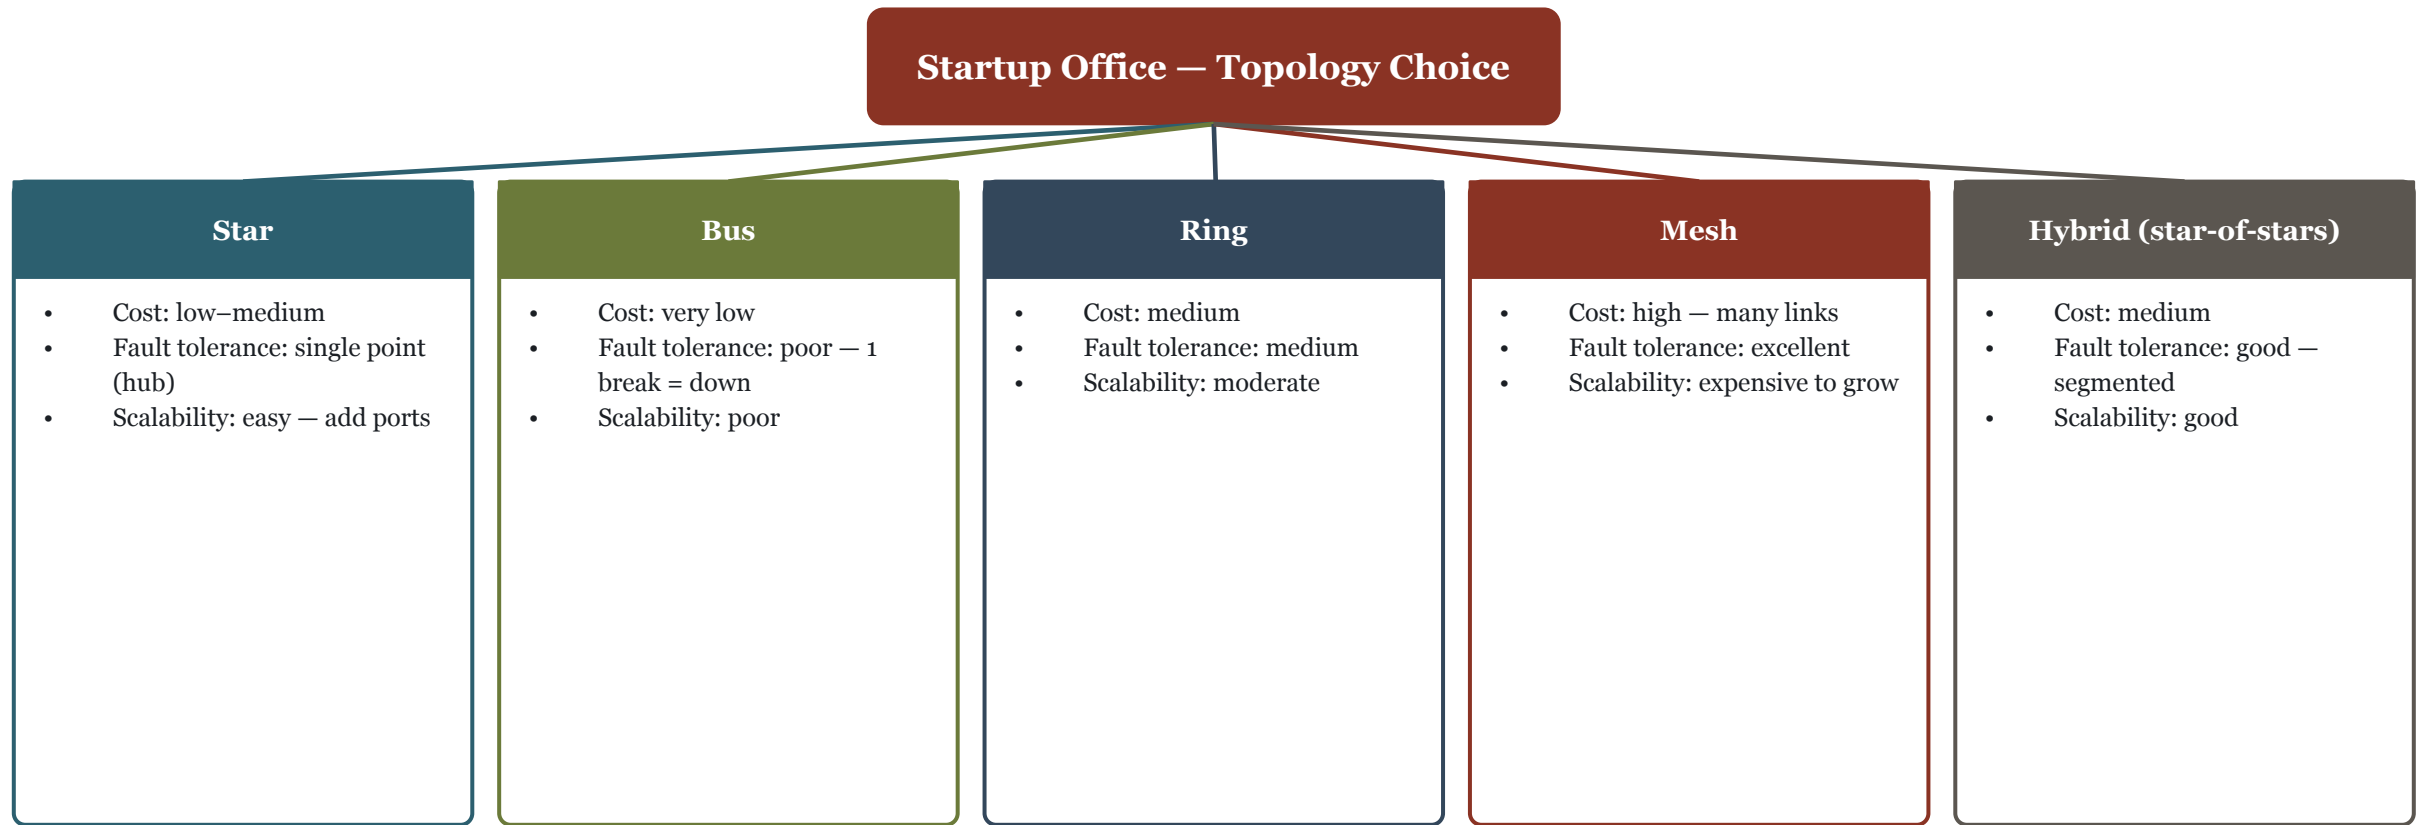


Source A (networking textbook): _____

Source B (SME network design case study / article): _____

Mark on map: where the two sources agree or disagree on the best-fit topology for a small office.

Scenario 4 — Wiring a Multi-Storey Data Center

Transmission media matched to use case, tied to Ethernet standards.

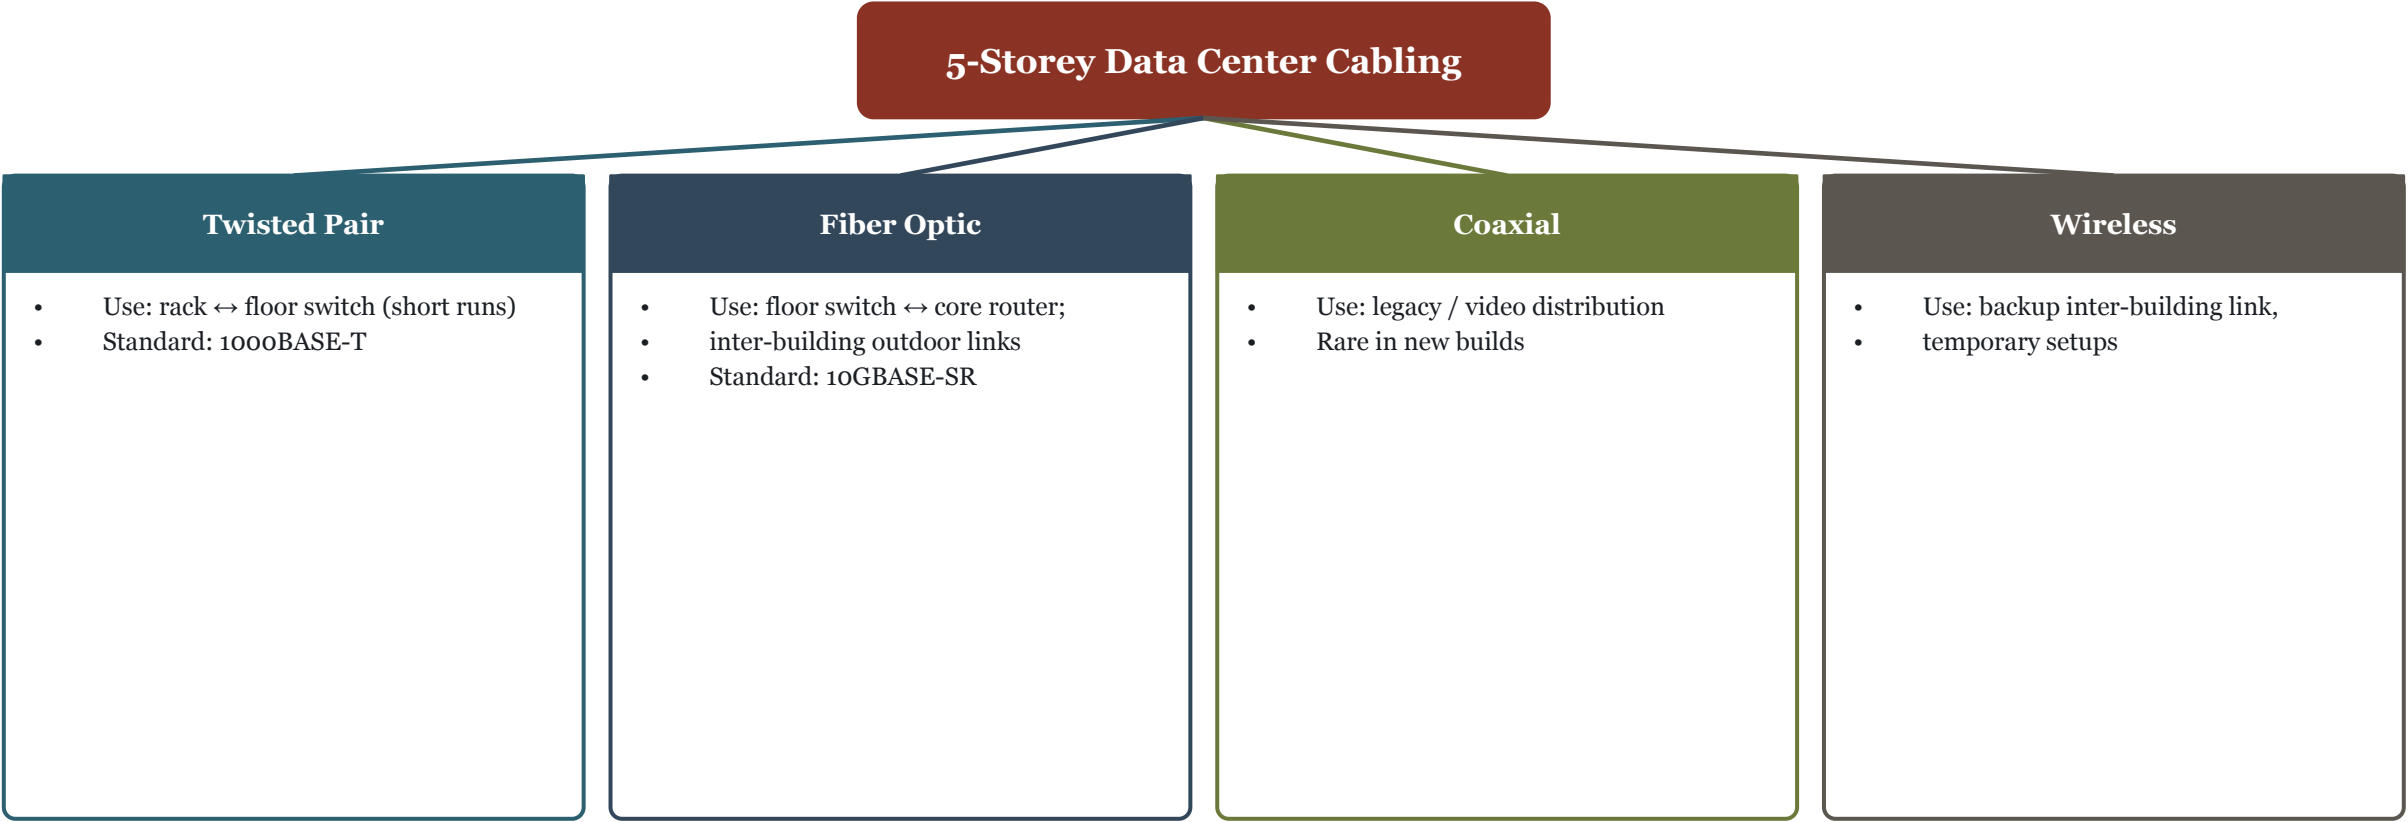


Source A (IEEE 802.3 Ethernet standard): _____

Source B (textbook / vendor cabling guide): _____

Flag on map: where the vendor guide's practical recommendation (e.g. run length, connector type) differs from the raw 802.3 spec.

Scenario 5 — Rolling Out 5G for a Smart Traffic System

5G architecture vs earlier generations, and its impact on protocols.

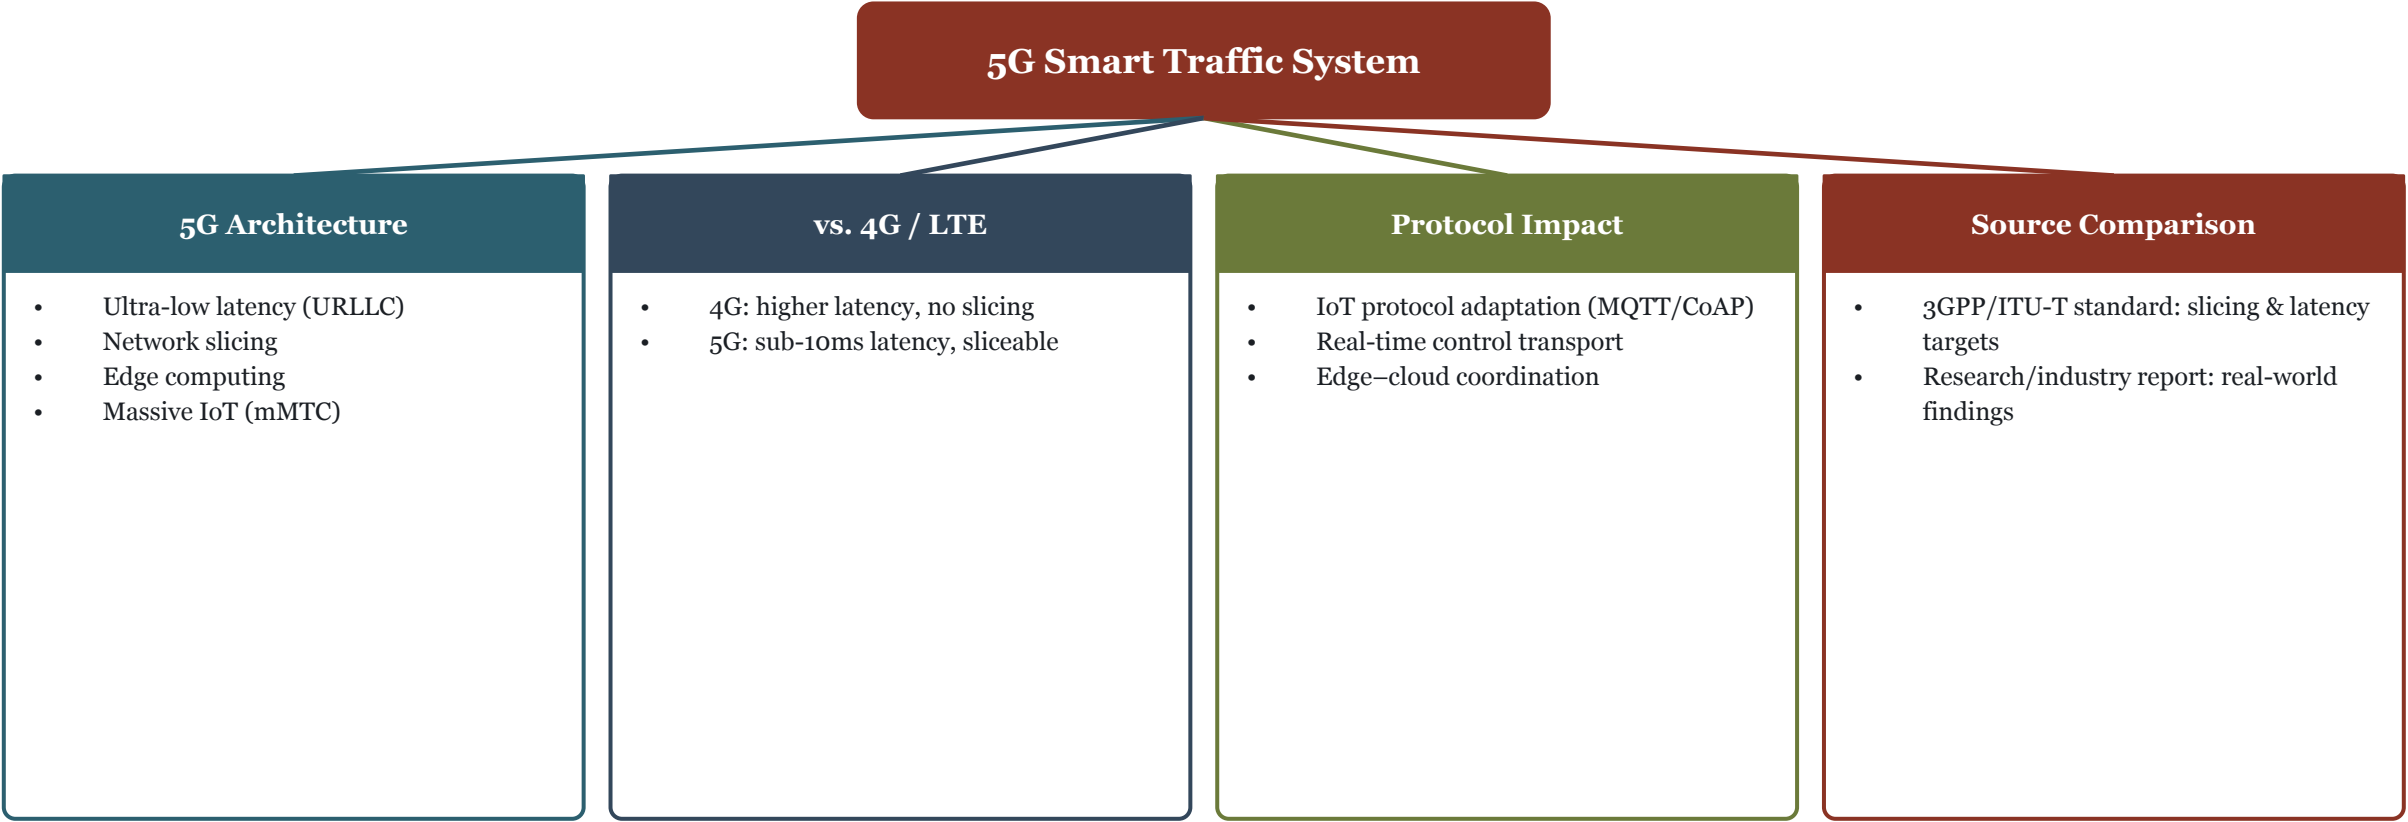

Source A (3GPP/ITU-T 5G standards summary): _____

Source B (research article / industry report on 5G-IoT): _____

Flag on map: whether the research literature confirms, extends, or complicates the standard's specified targets.