ADValT — Industrial BT Rubber Quality Batch Report


Batch ID: | Generated: 2026-09-10 16:03:44 | Process: AC-10 Autoclave

Batch Evaluation	Golden Batch Score	Process Adherence	Quality Score
GOLDEN	100.0%	50.0%	100.0%

11 Predicted Laboratory Quality Parameters

Parameter	Predicted Value	Specification (LSL - USL)	Target	Status
AC Mooney	57.25 MU	[50.0 - 60.0]	55.0	Within range
Ash%	6.05 %	[3.0 - 7.0]	5.0	Within range
CB%	29.98 %	[28.0 - 36.0]	32.0	Within range
AE%	7.57 %	[6.0 - 12.0]	9.0	Within range
VM%	0.16 %	[0.0 - 1.0]	0.2	Within range
RHC	56.16 %	[50.0 - 100.0]	56.0	Within range
Specific Gravity	1.15 g/cc	[1.12 - 1.16]	1.14	Within range
Mv	41.26 MU	[30.0 - 45.0]	37.5	Within range
TS	84.97 kg/cm2	[75.0 - 150.0]	88.0	Within range
EB	512.78 %	[480.0 - 750.0]	520.0	Within range
Hardness	50.56 Shore A	[48.0 - 54.0]	51.0	Within range

Process Adherence Radar Comparison

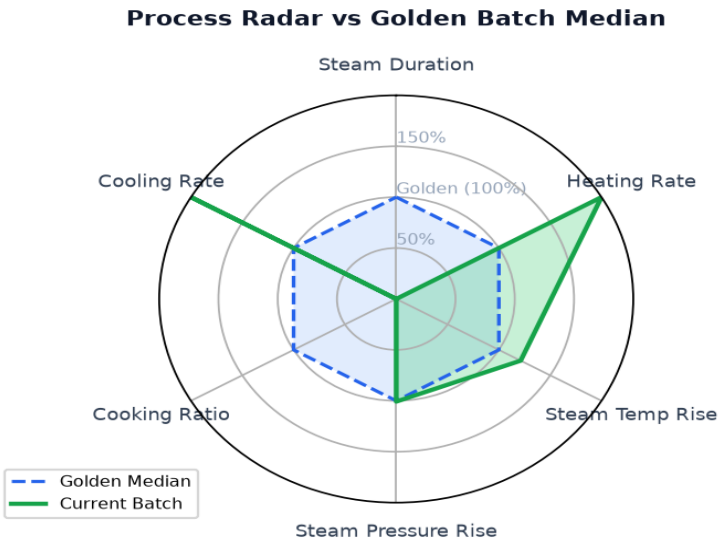

Batch Process Timeline Milestones

Milestone Stage	Clock Time	Elapsed Minutes from Start
Start	00:00	+0.0 min
Steam Open	00:00	+0.0 min
Steam Close	00:00	+0.0 min

Cooking	00:00	+0.0 min
Cooling	00:00	+0.0 min
Bottom Door	00:00	+0.0 min
End	00:00	+0.0 min

Key Industrial Engineered Process Features

Feature Name	Calculated Value	Feature Name	Calculated Value
Steam Duration	0.0	Heating Rate	40.0
Steam Temp Rise	40.0	Steam Pressure Rise	5.0
Cooking Duration Verified	0.0	Cooking Ratio	0.0
Cooling Delay	0.0	Cooling Rate	20.0
Thermal Exposure Score	0.0	Low Tf Ratio	0.0
Batch Duration Deviation	-5.0	Total Batch Duration	0.0