ADValT — Industrial BT Rubber Quality Batch Report


Batch ID: **BT-040152-0** | Generated: 2026-09-24 16:06:10 | Process: AC-10 Autoclave

Batch Evaluation	Golden Batch Score	Process Adherence	Quality Score
GOLDEN	100.0%	87.4%	100.0%

11 Predicted Laboratory Quality Parameters

Parameter	Predicted Value	Specification (LSL - USL)	Target	Status
AC Mooney	58.42 MU	[50.0 - 60.0]	55.0	Within range
Ash%	5.77 %	[3.0 - 7.0]	5.0	Within range
CB%	30.17 %	[28.0 - 36.0]	32.0	Within range
AE%	7.76 %	[6.0 - 12.0]	9.0	Within range
VM%	0.18 %	[0.0 - 1.0]	0.2	Within range
RHC	56.36 %	[50.0 - 100.0]	56.0	Within range
Specific Gravity	1.15 g/cc	[1.12 - 1.16]	1.14	Within range
Mv	39.07 MU	[30.0 - 45.0]	37.5	Within range
TS	85.41 kg/cm2	[75.0 - 150.0]	88.0	Within range
EB	509.13 %	[480.0 - 750.0]	520.0	Within range
Hardness	50.90 Shore A	[48.0 - 54.0]	51.0	Within range

Process Adherence Radar Comparison

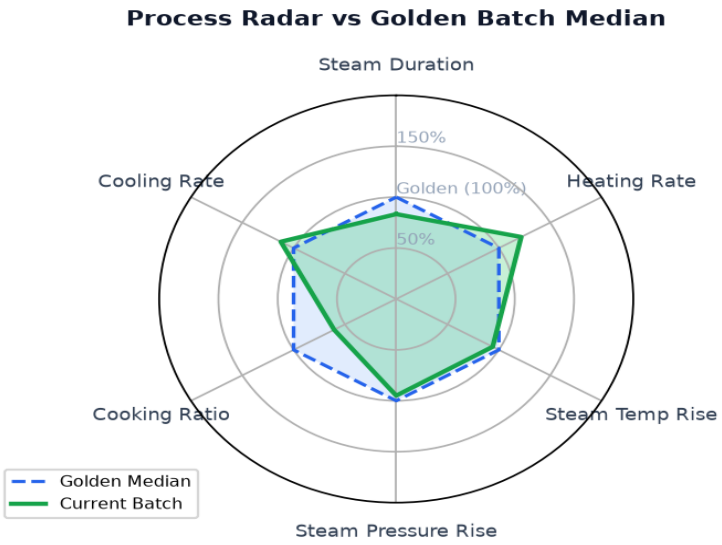

Batch Process Timeline Milestones

Milestone Stage	Clock Time	Elapsed Minutes from Start
Start	22:01	+0.0 min
Cooking	22:38	+37.0 min
Steam Open	23:06	+65.0 min

Steam Close	23:16	+75.0 min
Cooling	02:18	+257.0 min
Bottom Door	03:20	+319.0 min
End	03:58	+357.0 min

Key Industrial Engineered Process Features

Feature Name	Calculated Value	Feature Name	Calculated Value
Steam Duration	10.0	Heating Rate	3.1
Steam Temp Rise	31.0	Steam Pressure Rise	4.71
Cooking Duration Verified	216.0	Cooking Ratio	0.605
Cooling Delay	4.0	Cooling Rate	1.75
Thermal Exposure Score	28296.0	Low Tf Ratio	0.6065
Batch Duration Deviation	351.0	Total Batch Duration	357.0